



Lumora Lighting


1-1b, Jalan Pandan 2/2, Taman Pandan Jaya, 55100, KL

 hello@lumoralighting.my +6018 295 5121

 Lumora Lighting

 Lumoralighting_my


幻影系列 005-018

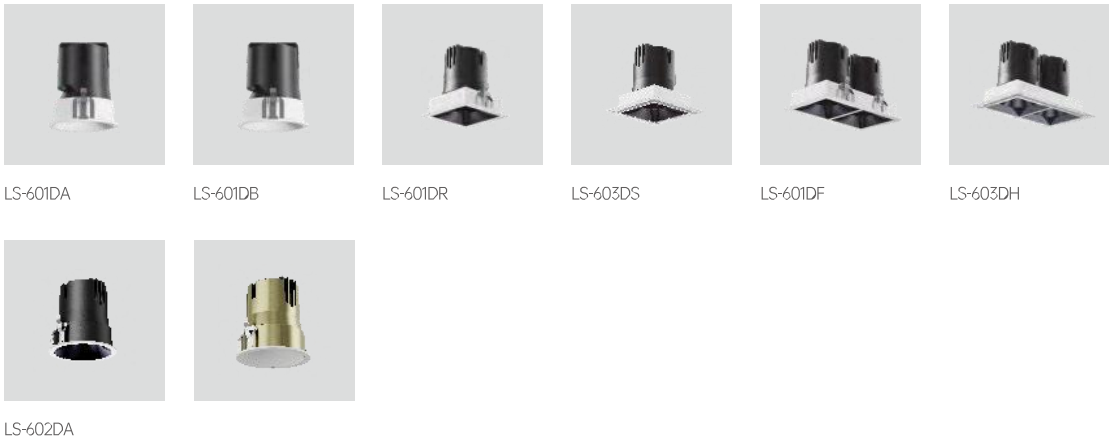

银河系列 0019-023



光影5S系 列 0024-033

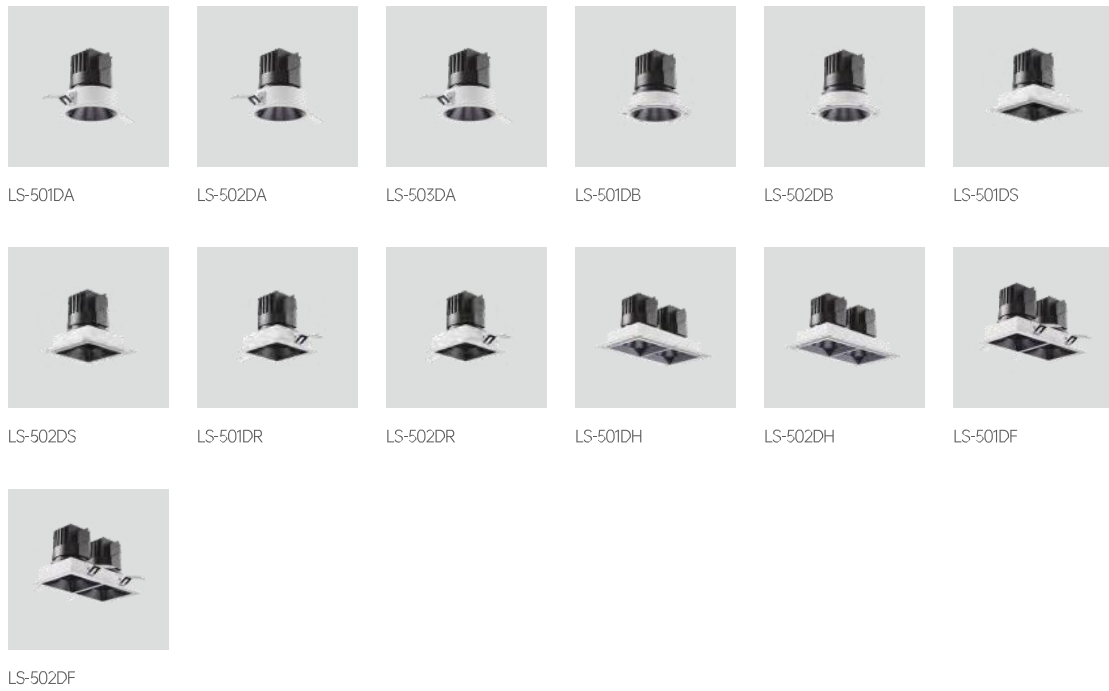


纤影系列 0034-045



天幕系列 0046-049



云端系列 0049-056

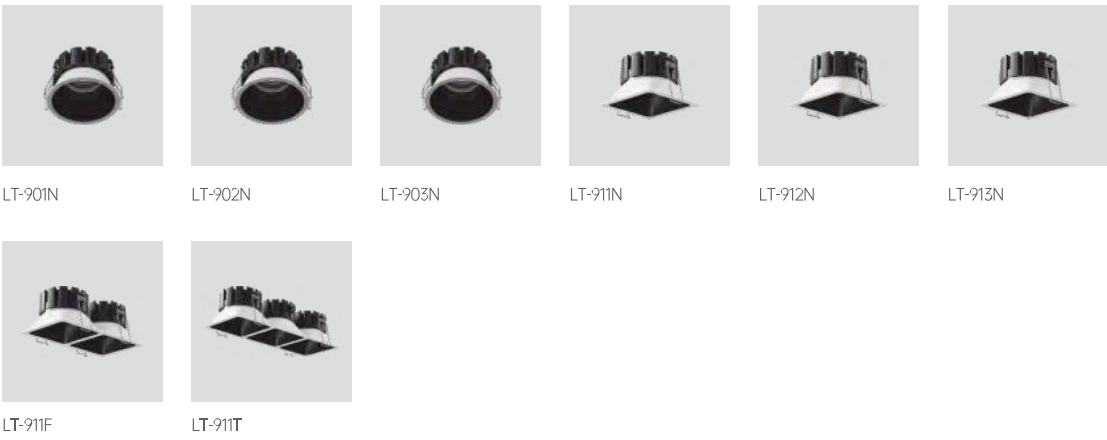

极光系列 0057-063



LD-321N 斜面



赫光系列 0064-0069



LT-911N 圆形嵌入式



LD-911N 圆形嵌入式



LT-912N 圆形嵌入式



LT-912N 圆形嵌入式



LT-913N 圆形嵌入式



LT-913N 圆形嵌入式

暮光系列 0070-0074



LM-811N 明装吸顶式



LM-801N 明装吸顶式



LM-812N 明装吸顶式



LM-802N 明装吸顶式



LM-813N 明装吸顶式



LM-803N 明装吸顶式

彩光系列 0075-082



泛光灯



格栅灯



折叠格栅灯



导轨射灯



可调导轨射灯



吊线灯



吊线灯



吊线灯



吊线灯



吊线灯

宝光系列 0083-091



磁吸款



导轨款



嵌入式




明装单头



明装双头



明装三头



嵌入式



明装单头



明装双头



明装三头



嵌入式



嵌入式无边框



外方内圆单头




外方内圆双头



外方内圆三头

光影7S系列 0092-098



圆形-直照




圆形-可调



圆形-无边框



圆形-调焦



圆形-黑洞

SHADOW

幻影系列

Familiarized design, diversified accessories to meet different lighting needs;
full range of lighting services. Suitable for villa flat, commercial restaurant,
hotel, exhibition hall and other applications.

模组化设计，配件多样化，满足不同的照明需求；全方位灯光服务，
适用于别墅平层、商业餐厅、酒店、展馆等多种应用领域。



In the past year, we have collected market information and customer customization needs through the marketing promotion of the Light and Shadow 5S series products. We have upgraded our existing products and launched the Phantom series, which maintains the continuity of the characteristics and specifications of the Light and Shadow 5S series. On the one hand, the Light and Shadow 6S series 75 hole heat sink has three heights of 78/88/98, divided into three power levels of 9W/12W/15W, and added a metal ring design. At the same time, the module design combination of the Light and Shadow 6S lamp body is more flexible, and can be matched with more different characteristic lenses and adjust the illumination angle to meet the lighting needs of different scenes.

在过去的一年，我们通过光影5S系列产品的市场推广中，对市场信息和客户的定制需求进行收集，对原有产品升级推出了幻影系列，幻影系列保持了与光影5S系列特点和规格的延续性，一方面光影6S系列75开孔散热器做了 78/88/98三个高度，分 9W/12W/15W三个功率，增加了金属中环款，同时，光影6S灯体的模组设计组合更加灵活，能搭配更多不同特点透镜和调配照射角度来适应不同场景照明需求。

幻影系列



12W

幻影系列-升级款



9W



12W



15W

78mm




88mm



98mm



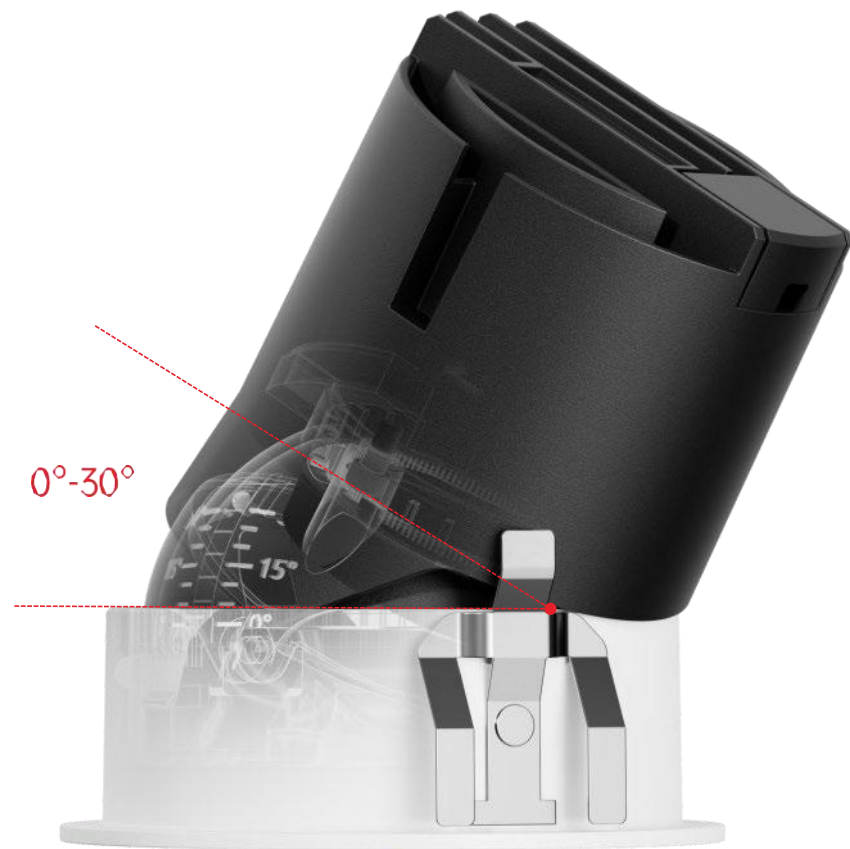


ADJUSTABLE ANGLE DESIGN

0°-30°摆角设计

Vertical 0 ° - 30 ° adjustable angle design, flexible lighting, accurate lighting, suitable for professional lighting debugging, pendulum angle toggle design, turn the angle, clear audible rhythmic feedback, fun.

垂直方向0°-30°可调角设计，灵活照明，精准打光，适合专业的灯光调试，摆角拨片设计，转动角度时，清晰有声节奏反馈，趣味性十足。

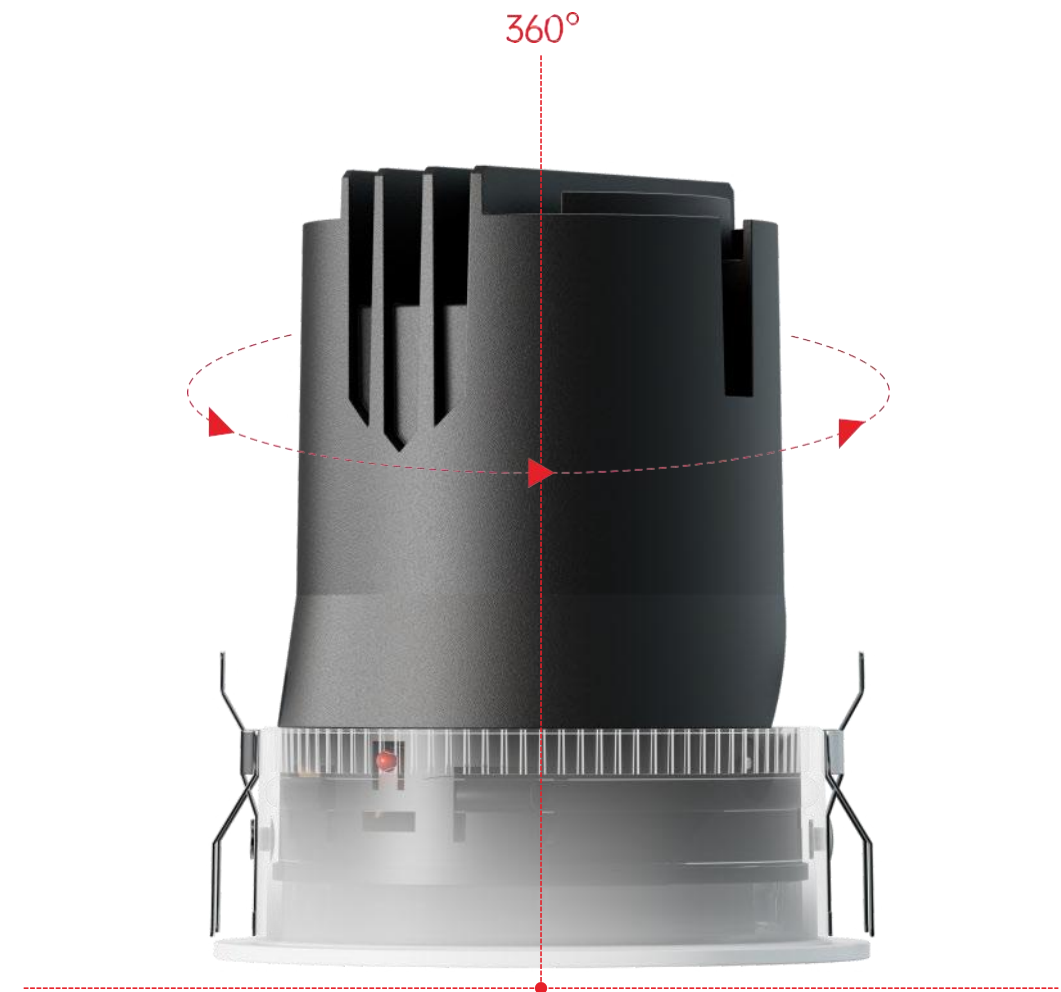

ADJUSTABLE ANGLE DESIGN

360°水平旋转设计

Deeply hidden light source design, spherical hood structure, double anti-glare, rounded light spot, large shading angle, high anti-glare index, giving people comfortable visual enjoyment.

水平350°可调，大角度旋转，精准打光，适合专业的灯光调试，弹珠卡点设计，清晰有声节奏反馈，趣味性十足。



ULTRA-NARROW BEZEL DESIGN

超窄边设计

5.75MM extreme narrow edge design, to achieve and the ceiling into one, to further improve the visual aesthetics of the space, presenting a true see light not see light.

5.75MM极致窄边设计，实现与天花融为一体，进一步提高空间的视觉美感，呈现出真正的见光不见灯。



SPHERICAL ANTI-GLARE

球形遮光防眩设计

Deeply hidden light source design, spherical hood structure, double anti-glare, rounded light spot, large shading angle, high anti-glare index, giving people comfortable visual enjoyment.


深藏光源设计，球形遮光罩结构，双重防眩，光斑圆润，大遮光角，高防眩指数，给人带来舒视的视觉享受。



CONCEALED PULL TABS 隐藏式拉环设计

The lamp body is equipped with a special pull ring, gently pull, easy to remove. The light body is equipped with a special pull ring as standard, easy to take out the lamps and adjust the pendulum head, without hurting the ceiling and easier to maintain.

灯体标配专用拉环，轻轻一拉，轻松取出灯具，调整摆头，不伤天花更易维护。

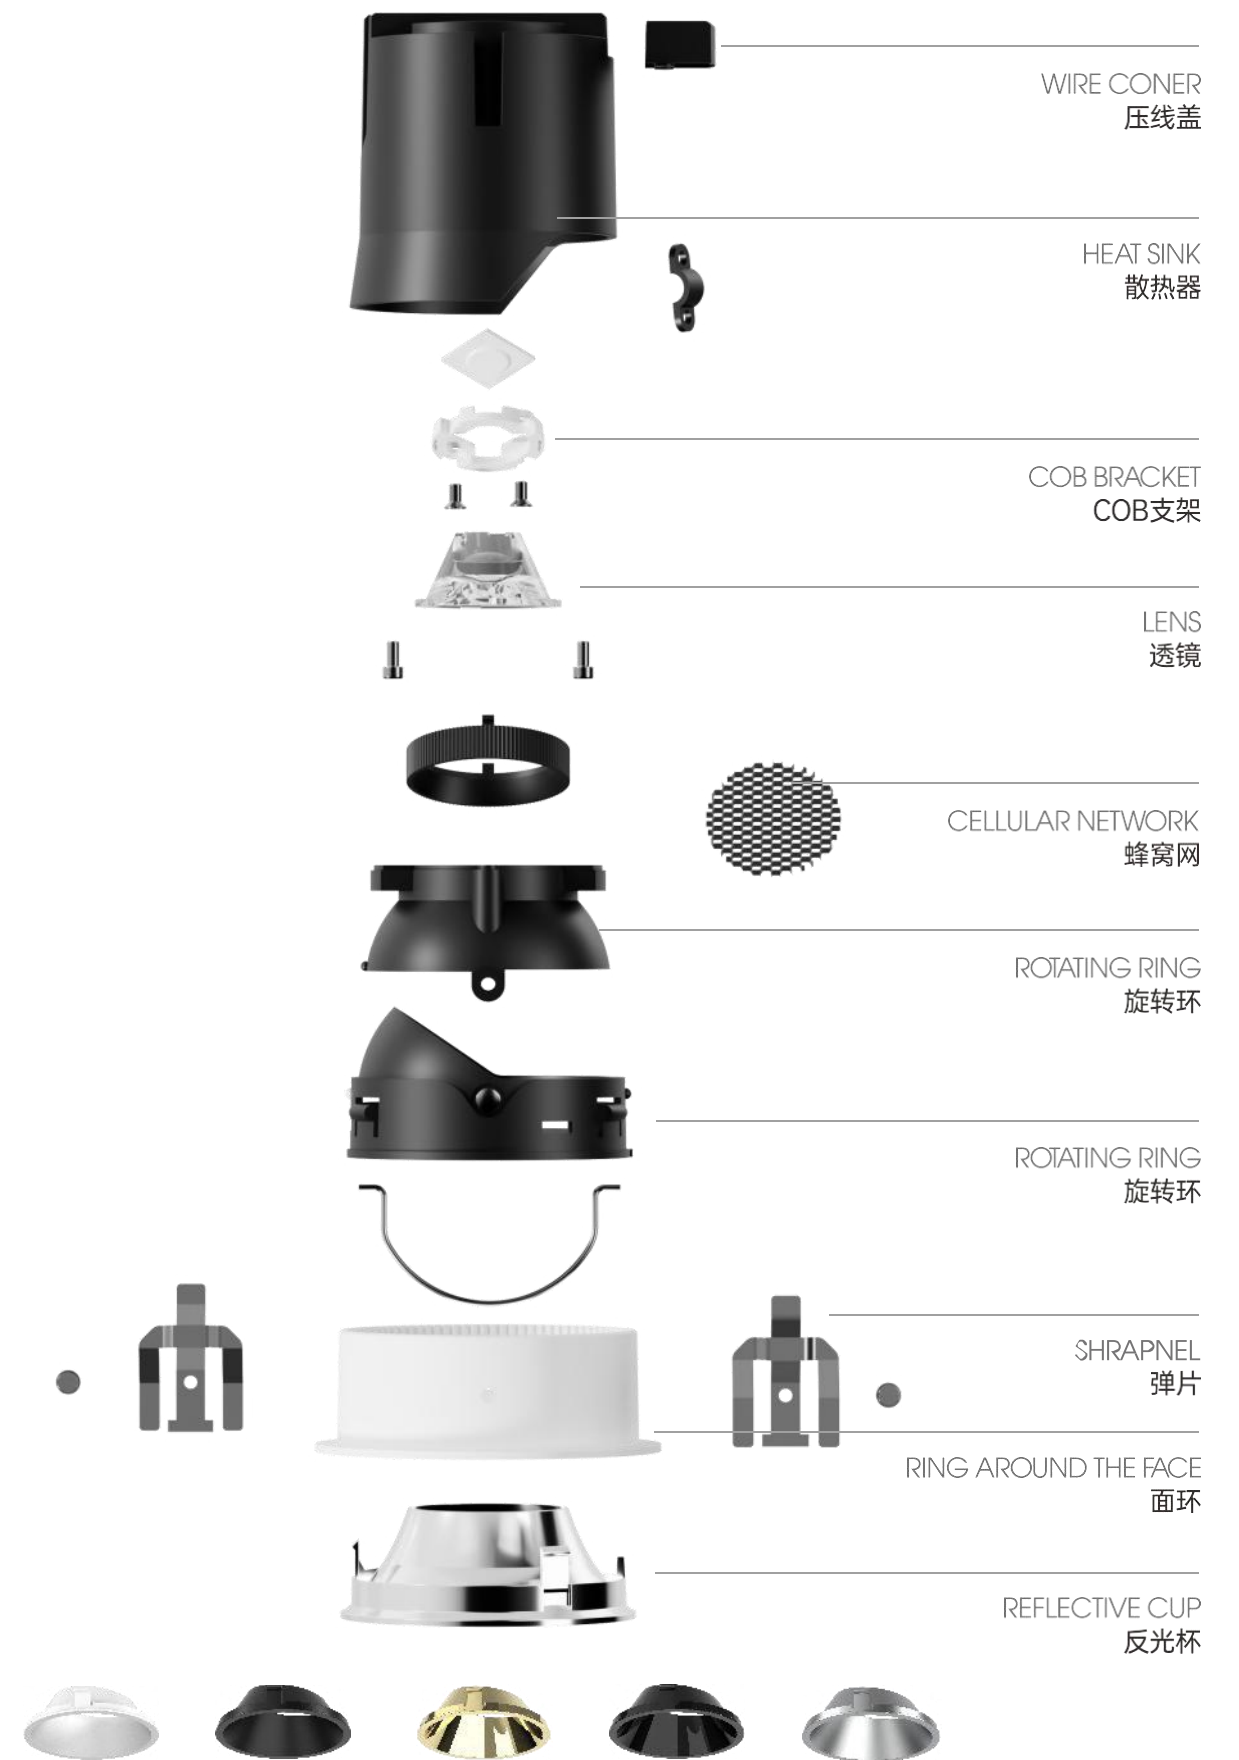


CREATIVE LOCKING DESIGN

创意锁止设计 更稳定切换筒射灯功能

Split design, creative locking function by turning the lamp body at different angles you can switch the downlight, spotlight function switch the downlight mode, the lamp body locks the non-adjustable angle: switch the spotlight mode. you can adjust the angle of light: at will according to the application scenarios adjusting the lighting mode. can be used flexibly in multiple scenarios

zlHzlait, I:or1aii>s:,s wâ aRz17Is, xFwc&fi
«. fiUA8; c&%«tfzsr, «Wifl«Uwfif8;
sr w<swxns; sa.c'ts>sauizs调整照明模式, wsss

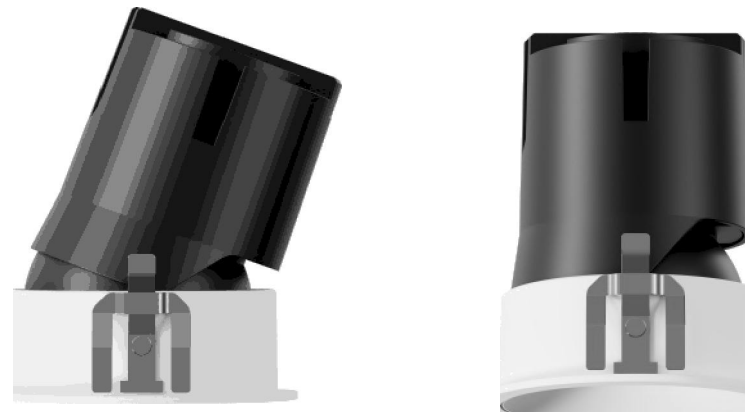

射灯模式



Brushed and glazed surface treatment
Pull-up product process

拉丝封釉、肤感漆等表面处理，拉升产品工艺



High luminous efficacy lens, replaceable design, can be
adjusted with the lighting requirementsProfessional light
control

高出光率透镜+可更换设计+可随照明需求调整
专业控光



蜂窝/光学膜/清光片



ACCURATE LIGHT CONTROL

精准控光

Four types of rings: oblique/straight/ellipse/small round hole.Optional, to create different light atmosphere, outstanding light spot.

斜照式/直照式/椭圆式/小圆孔四种面环可选，营造不同出光氛围，光斑出众。

斜照式

椭圆孔

小圆孔

直照式

SHADOW SERIES

Spotlight

幻影系列洗墙灯



圆形嵌入式




LS-601DA

POWER 功率: 9W
SIZE 产品尺寸: 62*76mm
CUTOUT 开孔尺寸: 55mm

LS-601DB

POWER 功率: 9W
SIZE 产品尺寸: 75*76mm
CUTOUT 开孔尺寸: 55mm


CRI 显色指数 ≥ 98
MATERIAL 材质: 压铸铝
CHIP 光源: COB
UGR 眩指数 ≥ 10
VOLTAGE 电压: AC85-265V

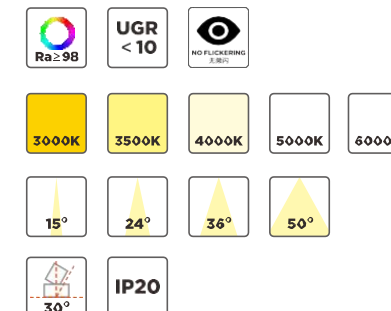


COLOR OF ANTI-GLARE CUP 防眩杯颜色



OPTICAL FILTER 滤光片






LIGHT DISTRIBUTION CURVE 配光曲线

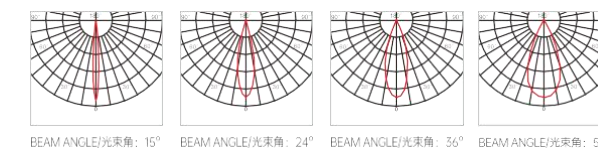

LS-601DR 方形嵌入式






POWER 功率：9W
SIZE 产品尺寸：62*62*76mm
CUTOUT 开孔尺寸：55*55mm
CRI 显色指数≥98
MATERIAL 材质：压铸铝
CHIP 光源：COB防
UGR 眩指数≥10
VOLTAGE 电压：AC85-265V

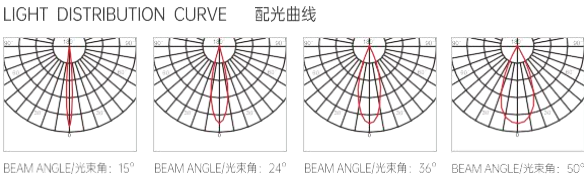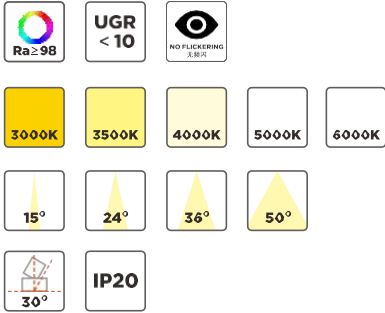

LS-603DS 方形预埋式






POWER 功率：9W
SIZE 产品尺寸：75*75*76mm
CUTOUT 开孔尺寸：55*55mm
CRI 显色指数≥98
MATERIAL 材质：压铸铝
CHIP 光源：COB防
UGR 眩指数≥10
VOLTAGE 电压：AC85-265V

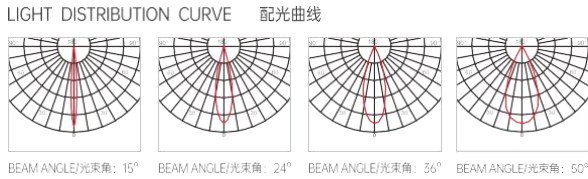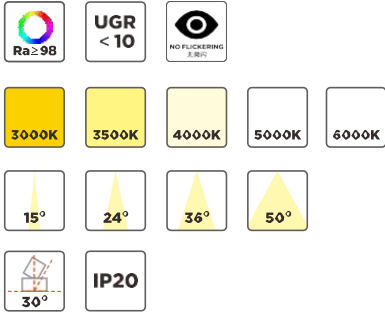

LS-601DF 双头方形嵌入式






POWER 功率：2*9W
SIZE 产品尺寸：64*64*76mm
CUTOUT 开孔尺寸：55*105mm
CRI 显色指数≥98
MATERIAL 材质：压铸铝
CHIP 光源：COB防
UGR 眩指数≥10
VOLTAGE 电压：AC85-265V

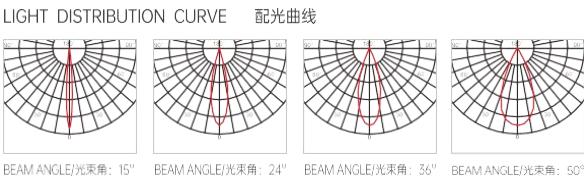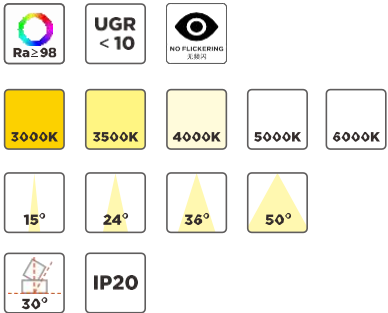


LS-603DH 双头方形预埋式



POWER 功率：2*9W
SIZE 产品尺寸：75*75*76mm
CUTOUT 开孔尺寸：55*105mm
CRI 显色指数≥98
MATERIAL 材质：压铸铝
CHIP 光源：COB防
UGR 眩指数≥10
VOLTAGE 电压：AC85-265V

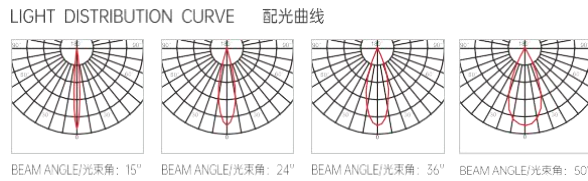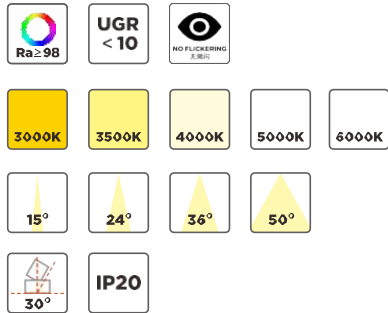

圆形嵌入式

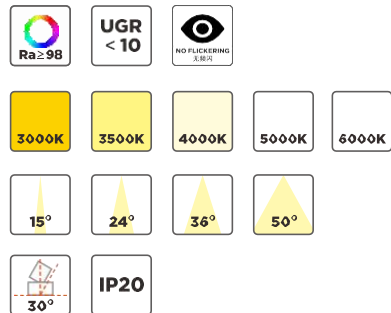


LS-601DA

POWER 功率：12W
SIZE 产品尺寸：85*78mm
85*88mm/85*98mm
CUTOUT 开孔尺寸：55mm




LS-602DB


POWER 功率：12W
SIZE 产品尺寸：105*88mm
105*88mm/105*98mm
CUTOUT 开孔尺寸：75mm





CRI 显色指数 ≥ 98
MATERIAL 材质：压铸铝
CHIP 光源：COB 防
UGR 眩指数 ≥ 10
VOLTAGE 电压：AC85-265V

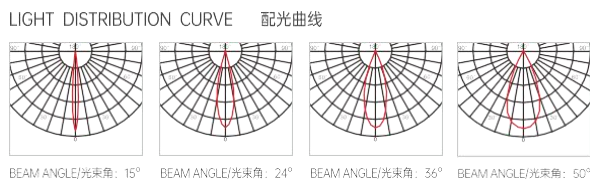

LS-602DR 方形嵌入式

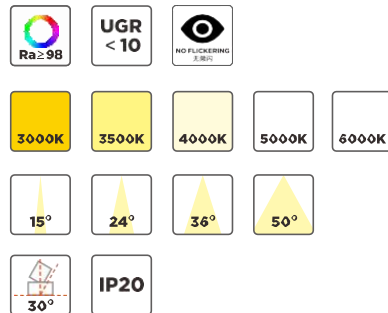




POWER 功率：12W
SIZE 产品尺寸：85*85*78mm
85*85*88mm/85*85*98mm
CUTOUT 开孔尺寸：75*75mm
CRI 显色指数 ≥ 98
MATERIAL 材质：压铸铝
CHIP 光源：COB 防
UGR 眩指数 ≥ 10
VOLTAGE 电压：AC85-265V

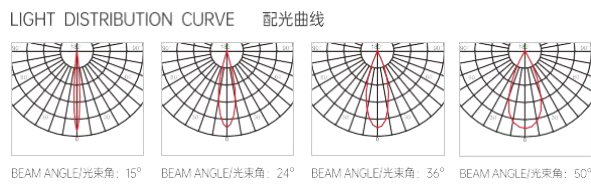

LS-602DS 方形预埋式






POWER 功率：12W
SIZE 产品尺寸：100*100*78mm
100*100*88mm/100*100*98mm
CUTOUT 开孔尺寸：75*75mm
CRI 显色指数≥98
MATERIAL 材 质：压 铸 铝
CHIP 光 源：C O B 防
UGR 眩指数≥10
VOLTAGE 电压：AC85-265V

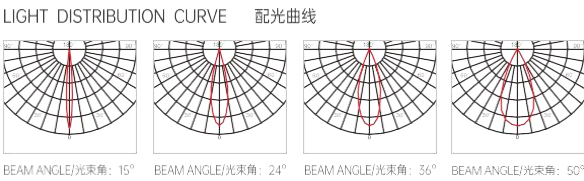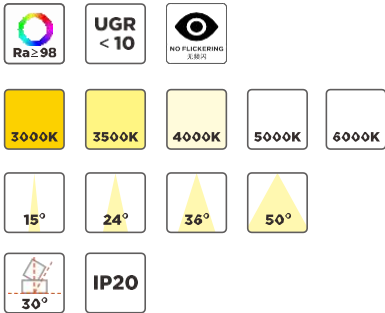

LS-602DF 双头方形嵌入式



POWER 功率：2*12W
SIZE 产品尺寸：85*60*78mm
85*60*88mm/85*60*98mm
CUTOUT 开孔尺寸：75*145mm
CRI 显色指数≥98
MATERIAL 材 质：压 铸 铝
CHIP 光 源：C O B 防
UGR 眩指数≥10
VOLTAGE 电压：AC85-265V

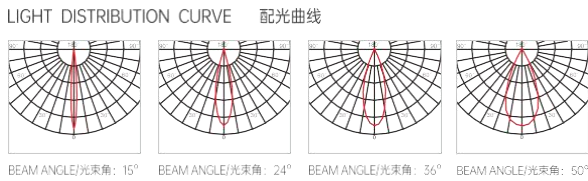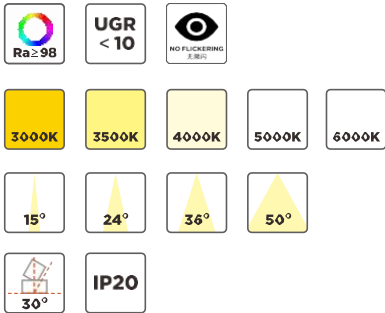

LS-602DS 双头方形预埋式



POWER 功率: 2*12W
SIZE 产品尺寸: 100*172*78mm
100*172*88mm/100*172*98mm
CUTOUT 开孔尺寸: 75*145mm
CRI 显色指数≥98
MATERIAL 材 质 : 压 铸 铝
CHIP 光 源 : C O B 防
UGR 眩指数≥10
VOLTAGE 电压: AC85-265V





COLOR OF ANTI-GLARE CUP 防眩杯颜色



OPTICAL FILTER 滤光片



LIGHT DISTRIBUTION CURVE 配光曲线



BEAM ANGLE/光束角: 15°

BEAM ANGLE/光束角: 24°

BEAM ANGLE/光束角: 36°

BEAM ANGLE/光束角: 50°



GALAXY

银河系列

Family-oriented design, accessory diversification, to meet different lighting needs; a full range of lightingservice, suitable for villas, commercial restaurants, hotels, exhibition halls and other application areas.service, suitable for villa floor, commercial restaurant, hotel, exhibition hall and other applications.


家族化设计，配件多样化，满足不同的照明需求；全方位灯光服务，适用于别墅平层、商业餐厅、酒店、展馆等多种应用领域。



GALAXY SERIES

Spotlight


银河系列洗墙灯

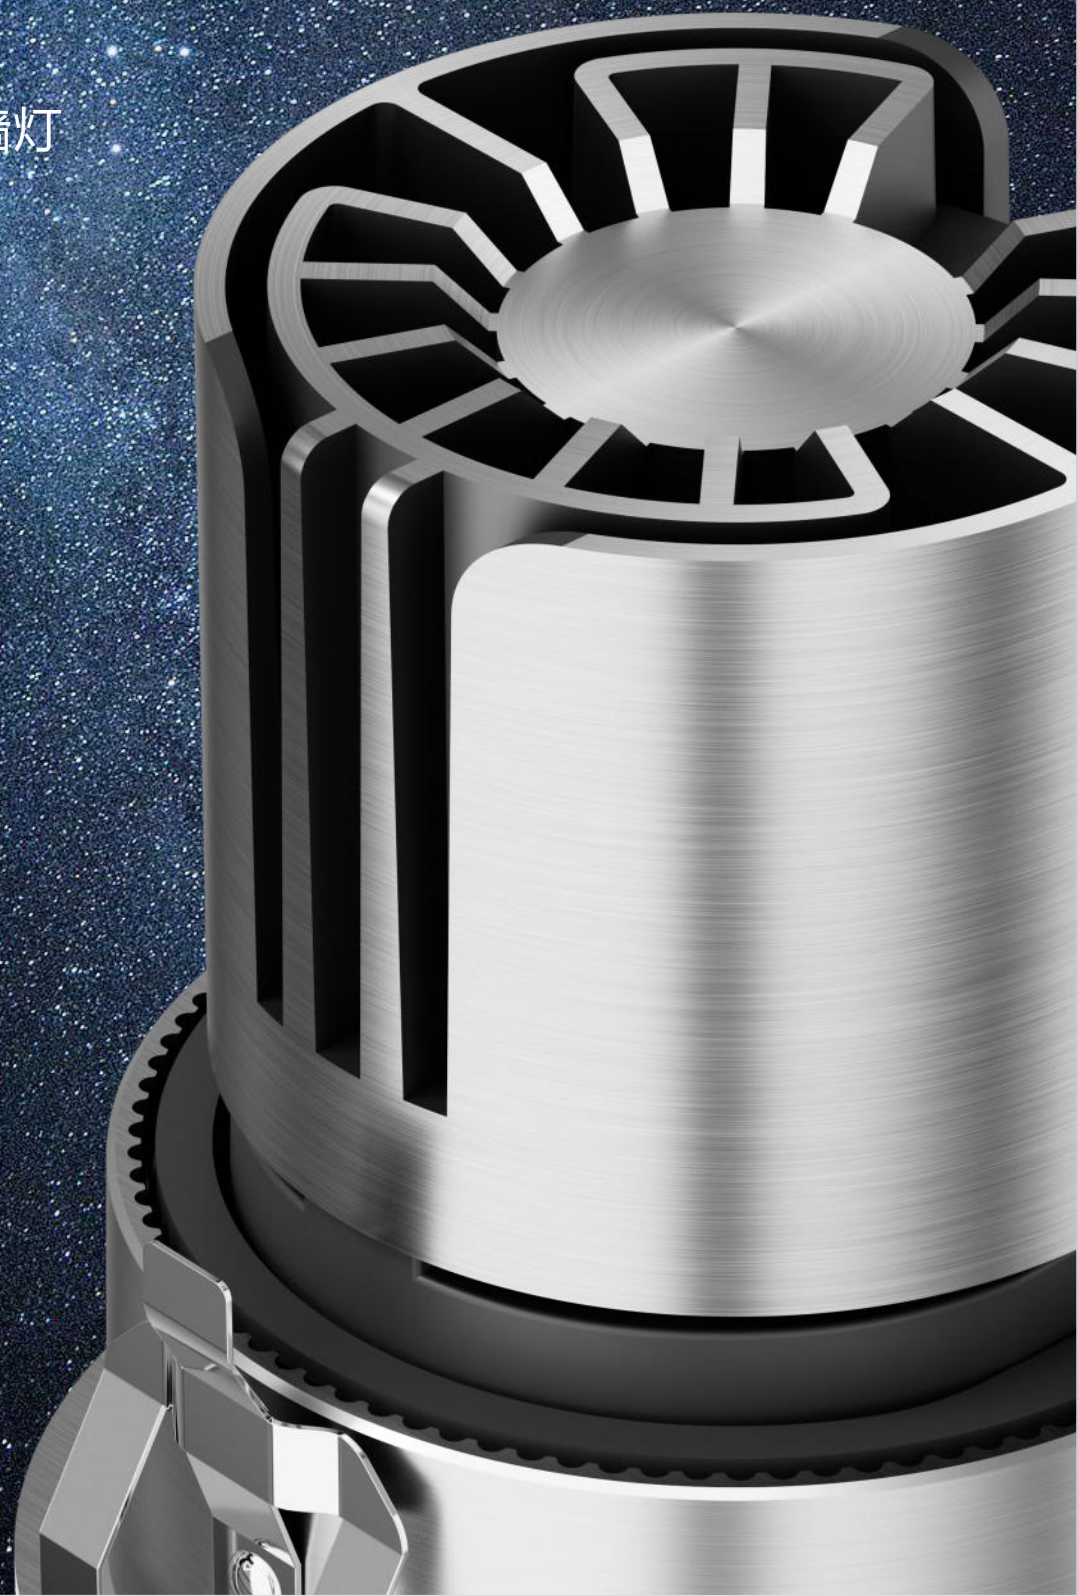

LS-522DA 圆形嵌入式



POWER	功率: 10W
SIZE	产品尺寸: 85*88mm
CUTOUT	开孔尺寸: 75mm
CRI	显色指数≥98
MATERIAL	材质: 压铸铝
CHIP	光源: COB防
UGR	眩指数≥10
VOLTAGE	电压: AC85-265V

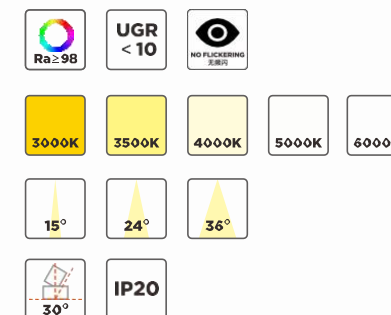


COLOR OF ANTI-GLARE CUP 防眩杯颜色




ANTI-GLARE ACCESSORIES 防眩配件



OPTICAL FILTER 滤光片




LIGHT DISTRIBUTION CURVE 配光曲线

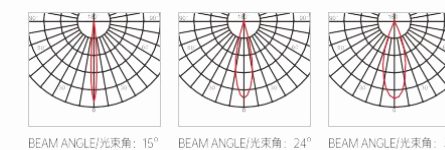

LS-522DB 圆形无边框



POWER 功率: 10W
SIZE 产品尺寸: 85*88mm
CUTOUT 开孔尺寸: 75mm
CRI 显色指数≥98
MATERIAL 材质: 压铸铝
CHIP 光源: COB防
UGR 眩指数≥10
VOLTAGE 电压: AC85-265V

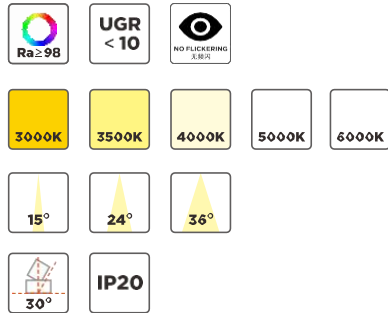


COLOR OF ANTI-GLARE CUP 防眩杯颜色




ANTI-GLARE ACCESSORIES 防眩配件



OPTICAL FILTER 滤光片




LIGHT DISTRIBUTION CURVE 配光曲线



LS-522DR 方形嵌入式



POWER 功率: 10W
SIZE 产品尺寸: 85**85*88mm
CUTOUT 开孔尺寸: 75*75mm
CRI 显色指数≥98
MATERIAL 材质: 压铸铝
CHIP 光源: COB防
UGR 眩指数≥10
VOLTAGE 电压: AC85-265V

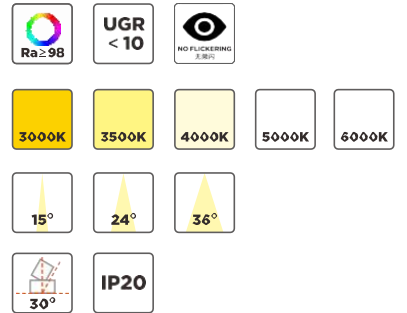


COLOR OF ANTI-GLARE CUP 防眩杯颜色




ANTI-GLARE ACCESSORIES 防眩配件



OPTICAL FILTER 滤光片






LIGHT DISTRIBUTION CURVE 配光曲线

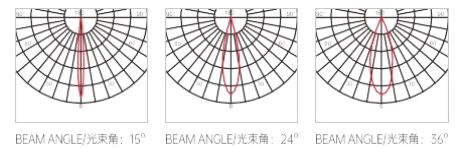

LS-522DS 方形无边框






POWER 功率: 10W
SIZE 产品尺寸: 100*100*88mm
CUTOUT 开孔尺寸: 75*75mm
CRI 显色指数≥98
MATERIAL 材质: 压铸铝
CHIP 光源: COB防
UGR 眩指数≥10
VOLTAGE 电压: AC85-265V

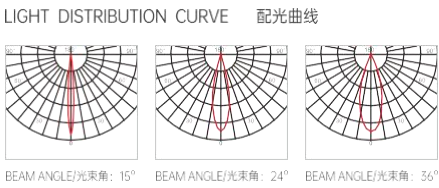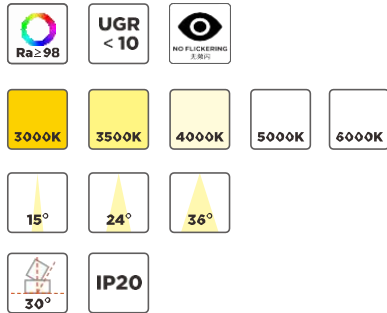

LS-522DF 方形双头嵌入式




POWER 功率: 2-10W
SIZE 产品尺寸: 160**85*75mm
CUTOUT 开孔尺寸: 145*75mm
CRI 显色指数≥98
MATERIAL 材质: 压铸铝
CHIP 光源: COB防
UGR 眩指数≥10
VOLTAGE 电压: AC85-265V

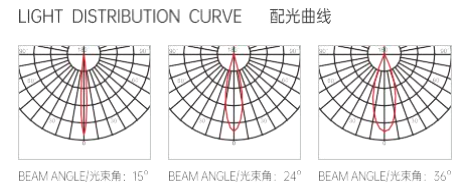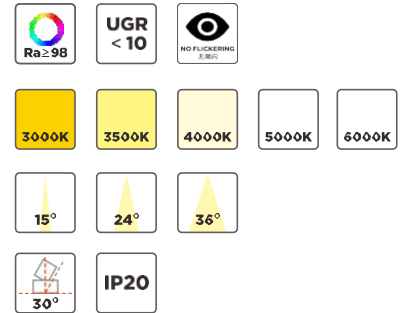

LS-522DH 方形双头无边框



POWER 功率: 2*10W
SIZE 产品尺寸: 160*85*75mm
CUTOUT 开孔尺寸: 145*75mm
CRI 显色指数≥98
MATERIAL 材质: 压铸铝
CHIP 光源: COB防
UGR 眩指数≥10
VOLTAGE 电压: AC85-265V

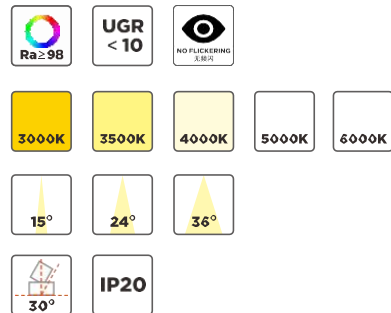


COLOR OF ANTI-GLARE CUP 防眩杯颜色




ANTI-GLARE ACCESSORIES 防眩配件



OPTICAL FILTER 滤光片



LIGHT DISTRIBUTION CURVE 配光曲线










SHADOW


光影5S系列

Familiarized design, diversified accessories to meet different lighting needs; full range of lighting services. Suitable for villa flat, commercial restaurant, hotel, exhibition hall and other applications.


家族化设计,配件多样化,满足不同的照明需求;全方位灯光服务,适用于别墅平层、商业餐厅、酒店、展馆等多种应用领域。



窄边圆形面板




窄边方形面板

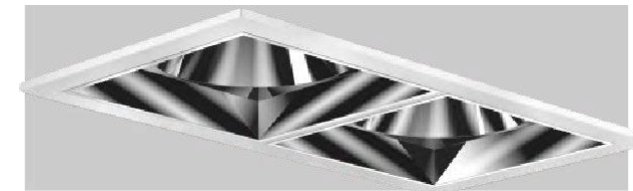


双头窄边方形面板




双头方形有边面板




无边圆形面板

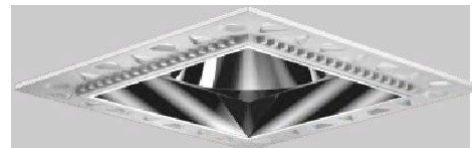

无边方形面板

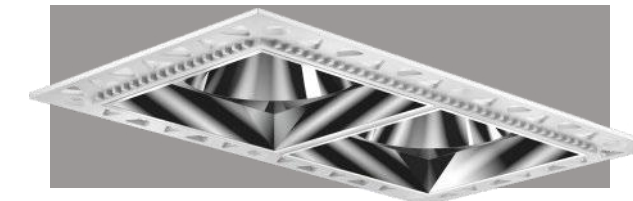

双头无边方形面板

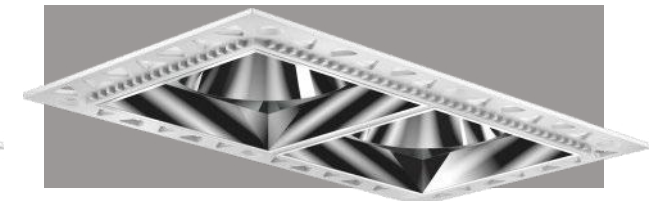

双头无边方形面板



极致黑洞

SERIALIZED DESIGN

家族化设计

Family-oriented design, accessory diversification, to meet different lighting needs; a full range of lighting service, suitable for villas, commercial restaurants, hotels, exhibition halls and other application areas. service, suitable for villa floor, commercial restaurant, hotel, exhibition hall and other applications.


家族化设计，配件多样化，可多种组合，满足不同的照明需求；全方位灯光服务，适用于别墅平层、商业餐厅、酒店、展馆等多种应用领域。

CONCEALED PULL TABS

隐藏式拉环设计

The lamp body is equipped with a special pull ring, gently pull, easy to remove. The light body is equipped with a special pull ring as standard, easy to take out the lamps and adjust the pendulum head, without hurting the ceiling and easier to maintain.

灯体标配专用拉环，轻轻一拉，轻松取出灯具，调整摆头，不伤天花更易维护。

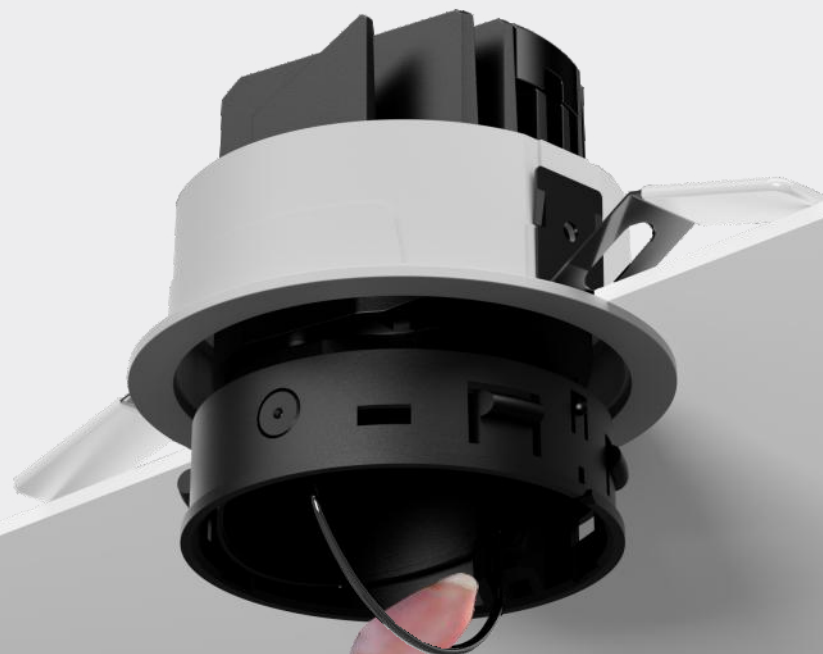

COMPOUND CONVEX LENS

复合式凸透镜

Precise light control, light source deep hidden design, effectively prevent dazzling. Light through the lens in the anti-glare cup filtered downward irradiation. The light from the lamp body is even and soft, presenting a perfect light spot, which can achieve a high standard of illumination. Uniform and soft, presenting a perfect spot, not only can achieve the high standard illumination effect, and at the same time, the light feeling comfort, reduce eye glare stimulation.

精准控光，光源深藏设计，有效防止炫光。光线经过透镜、在防眩杯滤后对下照射。灯体出光均匀柔和，呈现完美光斑，既能达到的高标准照亮效果，同时光感舒适度，减少眼部受到眩光刺激。



SPHERICAL ANTI-GLARE

球形遮光防眩设计

Deeply hidden light source design, spherical hood structure, double anti-glare, rounded light spot, large shading angle, high anti-glare index, giving people comfortable visual enjoyment.

深藏光源设计，球形遮光罩结构，双重防眩，光斑圆润，大遮光角，高防眩指数，给人带来舒适的视觉享受。




ANGLE ADJUSTMENT

灵活调角设计

Adjustable 30° in the vertical direction, 350° in the horizontal direction, large angle rotation, precise lighting, suitable for professional lighting debugging, clear and audible rhythm, turn the card shaft, and you can hear the sense of high-end.


垂直方向30°可调，水平350°可调，大角度旋转精准打光，适合专业的灯光调试，清晰有声节奏转动卡轴，听得到的高级感。

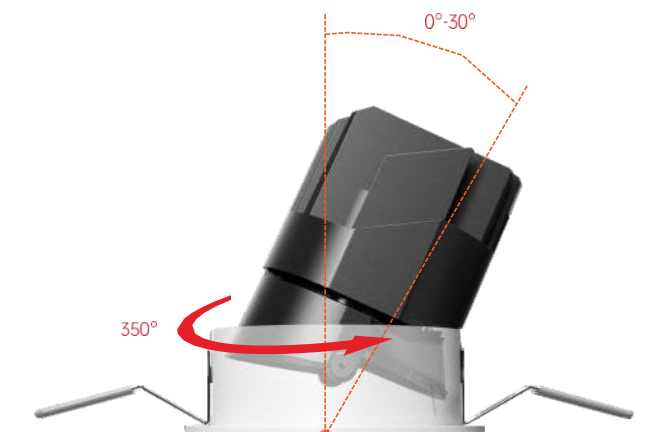


SHADOW SERIES
Spotlight

光影5S系列洗墙灯

LS-501DA



POWER 功率: 9W
CUTOUT 开孔尺寸: 55mm
CRI 显色指数≥98
MATERIAL 材质: 压铸铝
CHIP 光源: COB 防
UGR 眩指数≥10
VOLTAGE 电压: AC85-265V

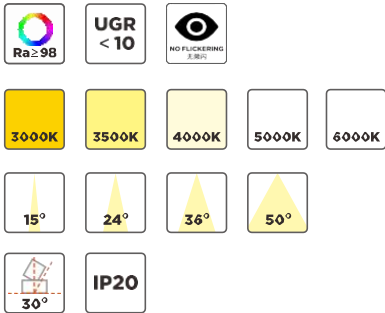


COLOR OF ANTI-GLARE CUP 防眩杯颜色




ANTI-GLARE ACCESSORIES 防眩配件



OPTICAL FILTER 滤光片





LIGHT DISTRIBUTION CURVE 配光曲线



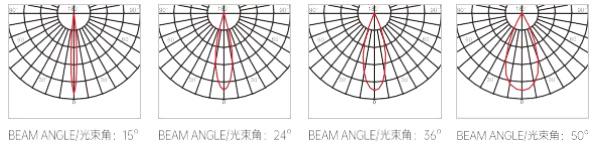


BEAM ANGLE/光束角: 15° BEAM ANGLE/光束角: 24° BEAM ANGLE/光束角: 36° BEAM ANGLE/光束角: 50°


LS-502DA






POWER 功率：12W
CUTOUT 开孔尺寸：75mm
CRI 显色指数≥98
MATERIAL 材质：压铸铝
CHIP 光源：COB防
UGR 眩指数≥10
VOLTAGE 电压：AC85-265V

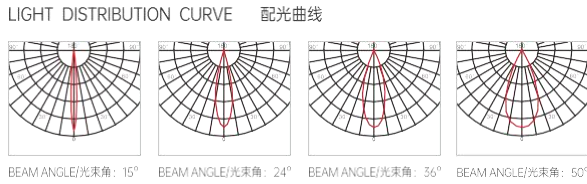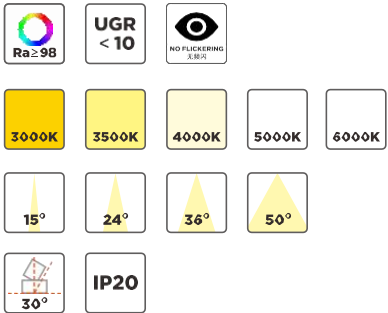



LS-503DA






POWER 功率：24W
CUTOUT 开孔尺寸：95mm
CRI 显色指数≥98
MATERIAL 材质：压铸铝
CHIP 光源：COB防
UGR 眩指数≥10
VOLTAGE 电压：AC85-265V

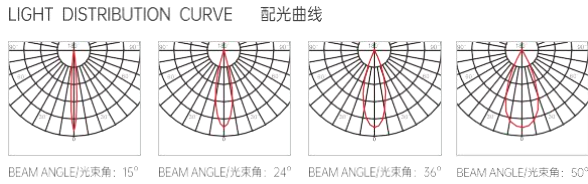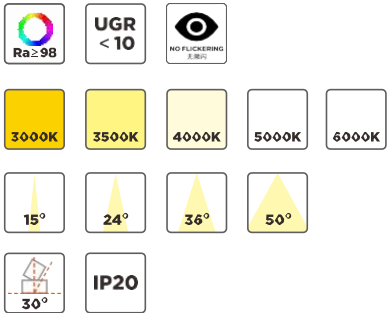

LS-501DB





POWER 功率：9W
CUTOUT 开孔尺寸：55mm
CRI 显色指数≥98
MATERIAL 材质：压铸铝
CHIP 光源：COB 防
UGR 眩指数≥10
VOLTAGE 电压：AC85-265V

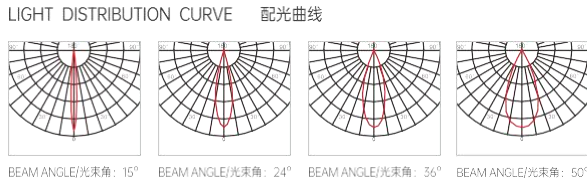

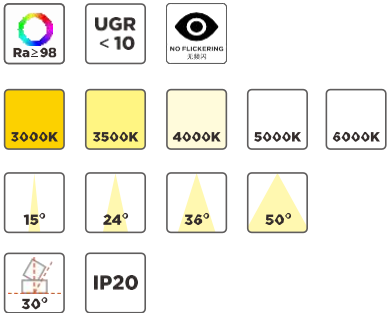


BEAM ANGLE/光束角：15° BEAM ANGLE/光束角：24° BEAM ANGLE/光束角：36° BEAM ANGLE/光束角：50°

LS-502DB





POWER 功率：12W
CUTOUT 开孔尺寸：75mm
CRI 显色指数≥98
MATERIAL 材质：压铸铝
CHIP 光源：COB 防
UGR 眩指数≥10
VOLTAGE 电压：AC85-265V

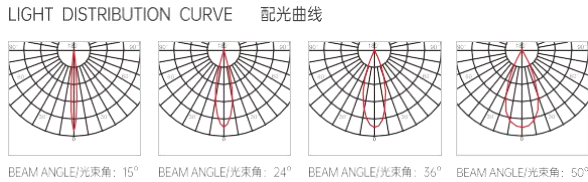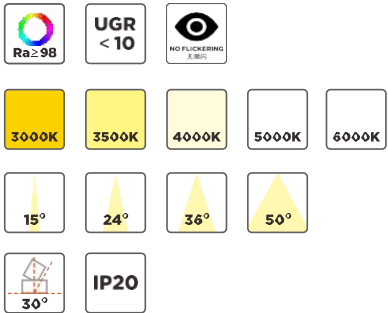


BEAM ANGLE/光束角：15° BEAM ANGLE/光束角：24° BEAM ANGLE/光束角：36° BEAM ANGLE/光束角：50°

LS-501DS



POWER 功率：9W
CUTOUT 开孔尺寸：55*55mm
CRI 显色指数≥98
MATERIAL 材 质：压 铸 铝
CHIP 光 源：C O B 防
UGR 眩指数≥10
VOLTAGE 电压：AC85-265V

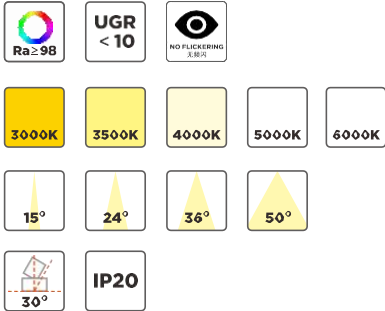


COLOR OF ANTI-GLARE CUP 防眩杯颜色




ANTI-GLARE ACCESSORIES 防眩配件



OPTICAL FILTER 滤光片





LIGHT DISTRIBUTION CURVE 配光曲线




BEAM ANGLE/光束角：15° BEAM ANGLE/光束角：24° BEAM ANGLE/光束角：36° BEAM ANGLE/光束角：50°

LS-502DS



POWER 功率：12W
CUTOUT 开孔尺寸：75*75mm
CRI 显色指数≥98
MATERIAL 材 质：压 铸 铝
CHIP 光 源：C O B 防
UGR 眩指数≥10
VOLTAGE 电压：AC85-265V

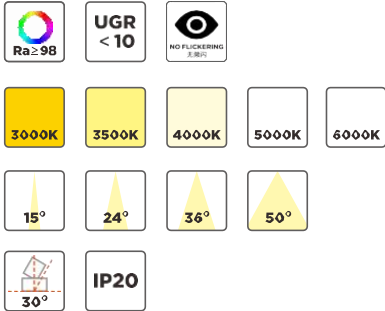


COLOR OF ANTI-GLARE CUP 防眩杯颜色




ANTI-GLARE ACCESSORIES 防眩配件



OPTICAL FILTER 滤光片






LIGHT DISTRIBUTION CURVE 配光曲线




BEAM ANGLE/光束角：15° BEAM ANGLE/光束角：24° BEAM ANGLE/光束角：36° BEAM ANGLE/光束角：50°

LS-501DR



POWER 功率：9W
CUTOUT 开孔尺寸：55*55mm
CRI 显色指数≥98
MATERIAL 材 质：压 铸 铝
CHIP 光 源：C O B 防
UGR 眩指数≥10
VOLTAGE 电压：AC85-265V

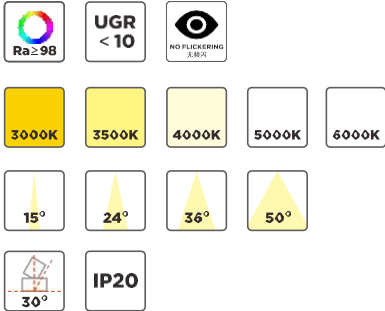


COLOR OF ANTI-GLARE CUP 防眩杯颜色




ANTI-GLARE ACCESSORIES 防眩配件



OPTICAL FILTER 滤光片






LIGHT DISTRIBUTION CURVE 配光曲线

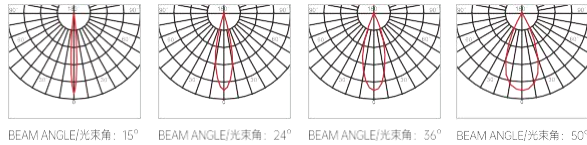


BEAM ANGLE/光束角：15° BEAM ANGLE/光束角：24° BEAM ANGLE/光束角：36° BEAM ANGLE/光束角：50°

LS-502DR



POWER 功率：12W
CUTOUT 开孔尺寸：75*75mm
CRI 显色指数≥98
MATERIAL 材 质：压 铸 铝
CHIP 光 源：C O B 防
UGR 眩指数≥10
VOLTAGE 电压：AC85-265V

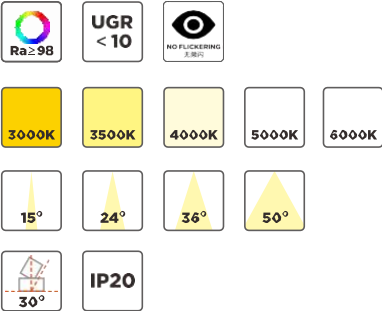


COLOR OF ANTI-GLARE CUP 防眩杯颜色




ANTI-GLARE ACCESSORIES 防眩配件



OPTICAL FILTER 滤光片





LIGHT DISTRIBUTION CURVE 配光曲线

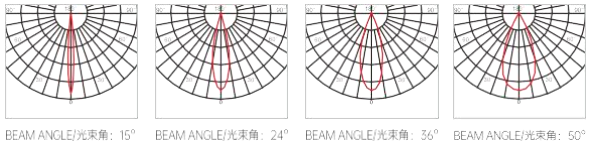


BEAM ANGLE/光束角：15° BEAM ANGLE/光束角：24° BEAM ANGLE/光束角：36° BEAM ANGLE/光束角：50°

LS-501DH



POWER 功率：2*9W
CUTOUT 开孔尺寸：138*55mm
CRI 显色指数≥98
MATERIAL 材 质：压 铸 铝
CHIP 光 源：C O B 防
UGR 眩指数≥10
VOLTAGE 电压：AC85-265V

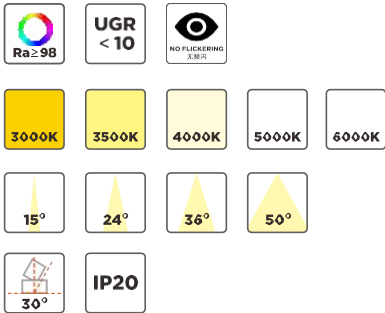


COLOR OF ANTI-GLARE CUP 防眩杯颜色




ANTI-GLARE ACCESSORIES 防眩配件



OPTICAL FILTER 滤光片





LIGHT DISTRIBUTION CURVE 配光曲线

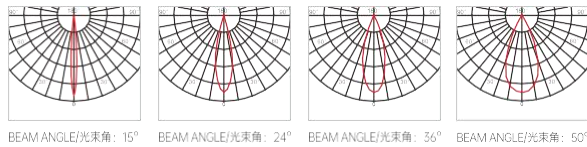


BEAM ANGLE/光束角：15° BEAM ANGLE/光束角：24° BEAM ANGLE/光束角：36° BEAM ANGLE/光束角：50°

LS-502DH



POWER 功率：2*12W
CUTOUT 开孔尺寸：145*75mm
CRI 显色指数≥98
MATERIAL 材 质：压 铸 铝
CHIP 光 源：C O B 防
UGR 眩指数≥10
VOLTAGE 电压：AC85-265V

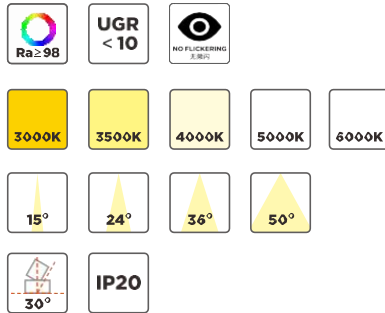


COLOR OF ANTI-GLARE CUP 防眩杯颜色




ANTI-GLARE ACCESSORIES 防眩配件



OPTICAL FILTER 滤光片






LIGHT DISTRIBUTION CURVE 配光曲线

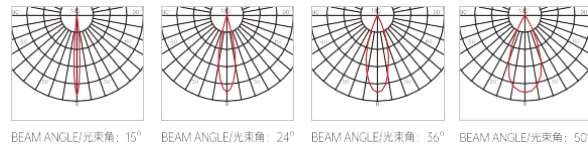


BEAM ANGLE/光束角：15° BEAM ANGLE/光束角：24° BEAM ANGLE/光束角：36° BEAM ANGLE/光束角：50°

LS-501DF



POWER 功率：2*9W
CUTOUT 开孔尺寸：138*55mm
CRI 显色指数≥98
MATERIAL 材 质：压 铸 铝
CHIP 光 源：C O B 防
UGR 眩指数≥10
VOLTAGE 电压：AC85-265V

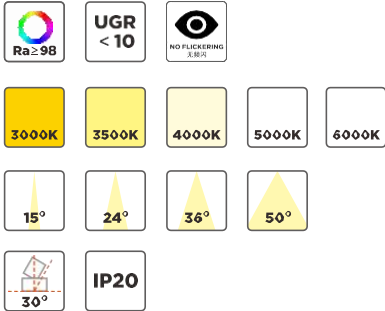


COLOR OF ANTI-GLARE CUP 防眩杯颜色




ANTI-GLARE ACCESSORIES 防眩配件



OPTICAL FILTER 滤光片






LIGHT DISTRIBUTION CURVE 配光曲线

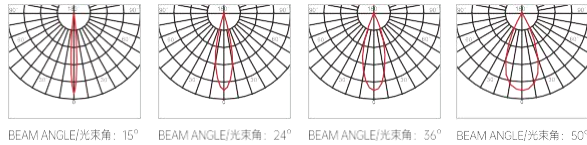


BEAM ANGLE/光束角：15° BEAM ANGLE/光束角：24° BEAM ANGLE/光束角：36° BEAM ANGLE/光束角：50°

LS-502DF



POWER 功率：2*12W
CUTOUT 开孔尺寸：145*75mm
CRI 显色指数≥98
MATERIAL 材 质：压 铸 铝
CHIP 光 源：C O B 防
UGR 眩指数≥10
VOLTAGE 电压：AC85-265V

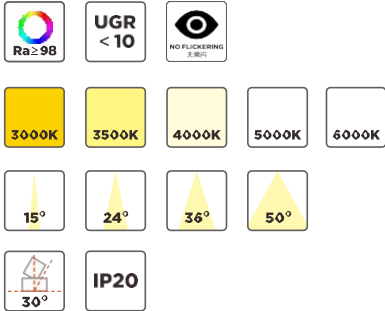


COLOR OF ANTI-GLARE CUP 防眩杯颜色




ANTI-GLARE ACCESSORIES 防眩配件



OPTICAL FILTER 滤光片



LIGHT DISTRIBUTION CURVE 配光曲线



BEAM ANGLE/光束角：15° BEAM ANGLE/光束角：24° BEAM ANGLE/光束角：36° BEAM ANGLE/光束角：50°


XIANYING

纤影系列

Small lamp body, high power, fusion of low height of the new design concept, perfectly adapted to a variety of ceiling height, not limited by the ceiling height; Unique appearance design, new concept, modular design, more in line with modern light needs; Diversification of surface ring, to meet different installation environment, wider scope of application.

小灯体，大功率，融合低高度的新设计理念，完美适应多种天花吊板，不受天花高度限制；
独特外观设计，全新理念，模块化设计，更符合现代用光需求；
面环多样化，满足不同的安装环境，适用范围更广泛。



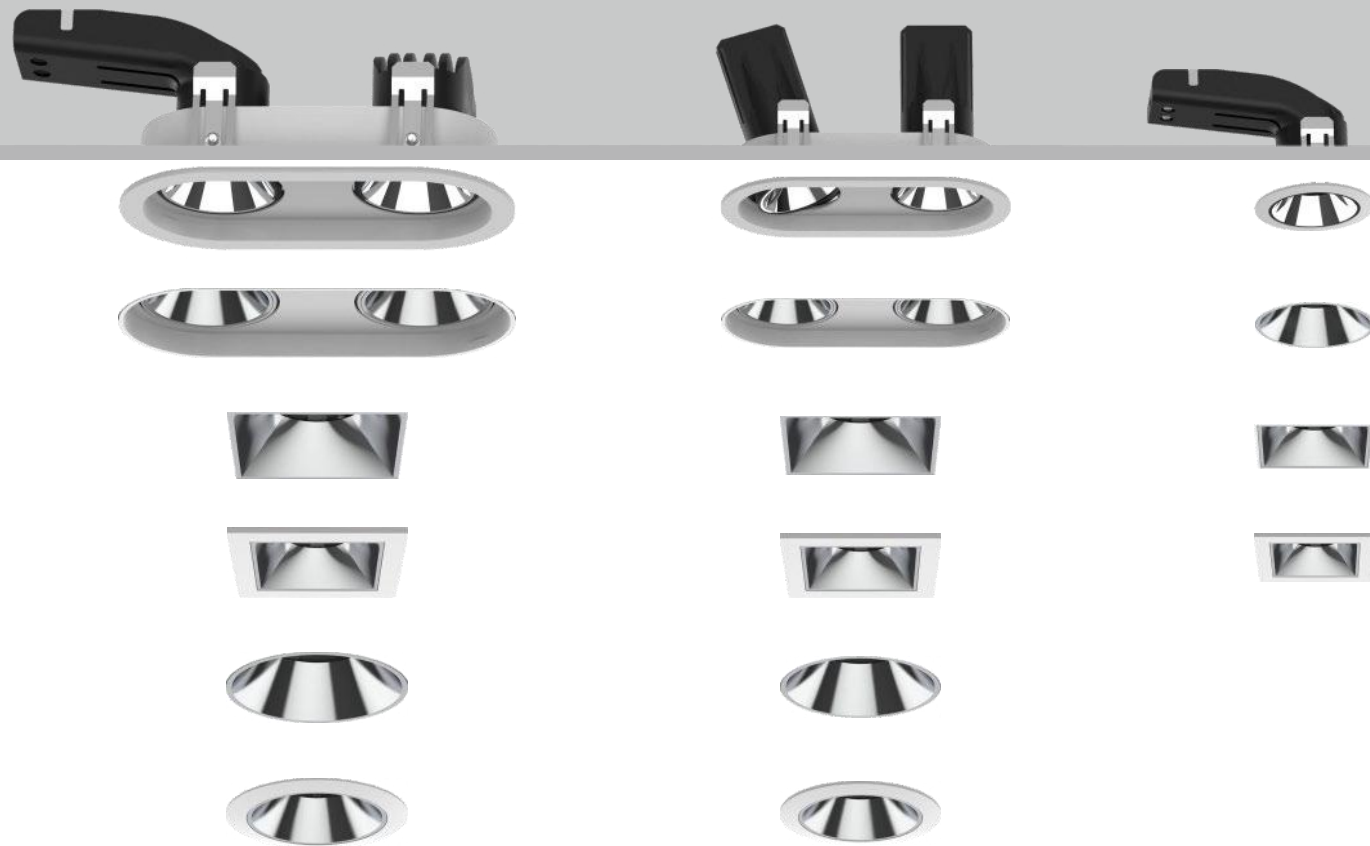

SERIALIZED DESIGN

模块化设计

Direct illumination and adjustable wall wash two modules to meet the needs of multiple lighting; SlimSlim lamp body is more soft and fashionable aesthetic, catering to various types of ceiling highThe slim body is more soft and fashionable, catering to the high ceiling decorations of various house types.

直照与可调洗墙两大模块，满足多照明需求；纤细灯体更具柔和时尚美感，迎合各种户型天花高度装饰。



CONCEALED PULL TABS

隐藏式拉环设计

The lamp body comes with a special pull ring, which can be pulled gently without damaging the ceiling, easily takeing out and adjusting the swing head.

灯体标配专用拉环，轻轻一拉，轻松取出灯具，调整摆头，更易维护。


NO FEAR OF HEIGHT

空间大师·无惧层高

整灯更小，外观独特

PRODUCT SPLIT DIAGRAM

产品细节拆分图解

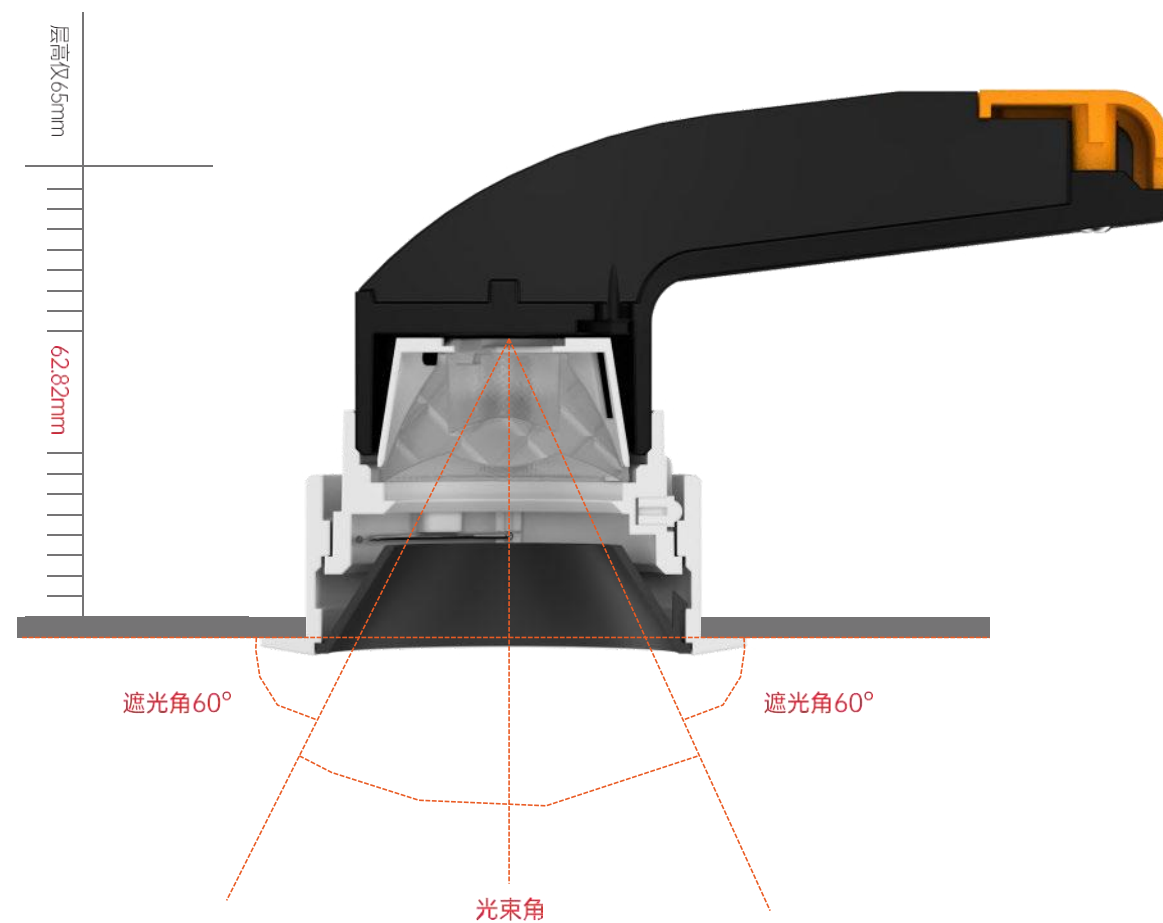

DEEP ANTI-GLARE

深度防眩·精准控光

Light source deep hidden design, precise light control, fiber shadow series of small aperture shading angle up to 60 °The light is effectively prevented from dazzling, and the light is finally refracted to the anti-glare cup through the lens and reflector. After filtering, the light comes out evenly and softly, presenting a perfect light spot, which can achieve a high standard of visual light comfort, reduce the eyes from glare damage.

光源深藏设计，精准控光，纤影系列小开孔遮光角可达60°，有效防止炫光，光线经过透镜、反射器最后折射到防眩杯滤后，出光均匀柔和，呈现完美光斑，能达到的高标准视觉光感舒适度，减少双眼受到眩光伤害。





XIANYING SERIES
Spotlight


纤影系列洗墙灯




LS-211N 圆形嵌入式/直角



POWER 功率: 12W
CUTOUT 开孔尺寸: 45mm
CRI 显色指数 ≥ 98
MATERIAL 材质: 压铸铝
CHIP 光源: COB
UGR 防眩指数 > 10
VOLTAGE 电压: AC85-265V

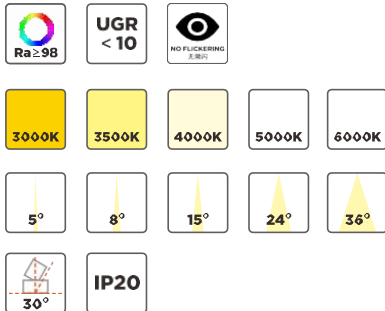


ANTI-GLARE CUP COLOR 防眩杯颜色




ANTI-GLARE ACCESSORIES 面环配件





OPTICAL FILTER 滤光片




LIGHT DISTRIBUTION CURVE 配光曲线

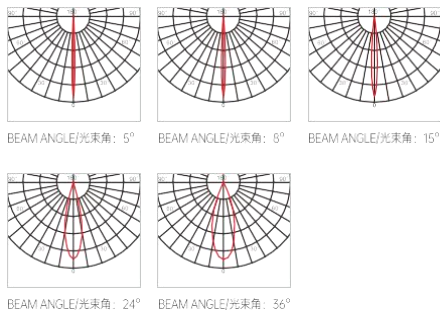


LS-211R 圆形无边框/直角



POWER 功率: 12W
CUTOUT 开孔尺寸: 45mm
CRI 显色指数 ≥ 98
MATERIAL 材质: 压铸铝
CHIP 光源: COB
UGR 防眩指数 > 10
VOLTAGE 电压: AC85-265V

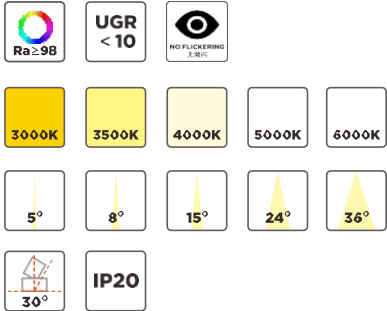


ANTI-GLARE CUP COLOR 防眩杯颜色




ANTI-GLARE ACCESSORIES 面环配件




OPTICAL FILTER 滤光片



LIGHT DISTRIBUTION CURVE 配光曲线





BEAM ANGLE/光束角: 5° BEAM ANGLE/光束角: 8° BEAM ANGLE/光束角: 15°




BEAM ANGLE/光束角: 24° BEAM ANGLE/光束角: 36°


LS-211N 方形嵌入式/直角



POWER 功率: 12W
CUTOUT 开孔尺寸: 45x45mm
CRI 显色指数 ≥ 98
MATERIAL 材质: 压铸铝
CHIP 光源: COB
UGR 防眩指数 > 10
VOLTAGE 电压: AC85-265V

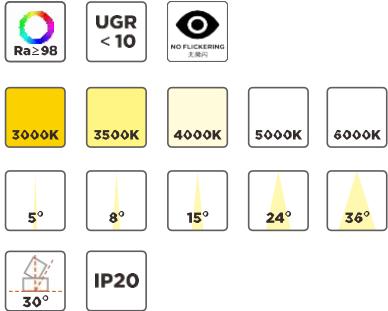


ANTI-GLARE CUP COLOR 防眩杯颜色




ANTI-GLARE ACCESSORIES 面环配件




OPTICAL FILTER 滤光片



LIGHT DISTRIBUTION CURVE 配光曲线





BEAM ANGLE/光束角: 5° BEAM ANGLE/光束角: 8° BEAM ANGLE/光束角: 15°




BEAM ANGLE/光束角: 24° BEAM ANGLE/光束角: 36°


LS-212R 方形无边框/直角



POWER 功率: 12W
CUTOUT 开孔尺寸: 45x45mm
CRI 显色指数 ≥ 98
MATERIAL 材质: 压铸铝
CHIP 光源: COB
UGR 防眩指数 > 10
VOLTAGE 电压: AC85-265V

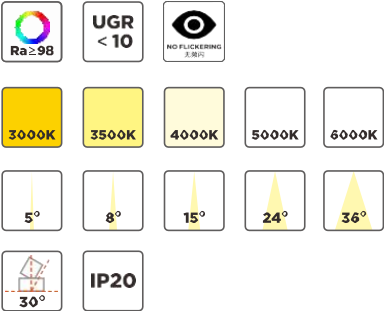


ANTI-GLARE CUP COLOR 防眩杯颜色




ANTI-GLARE ACCESSORIES 面环配件




OPTICAL FILTER 滤光片



LIGHT DISTRIBUTION CURVE 配光曲线





BEAM ANGLE/光束角: 5° BEAM ANGLE/光束角: 8° BEAM ANGLE/光束角: 15°




BEAM ANGLE/光束角: 24° BEAM ANGLE/光束角: 36°


LS-213DN 椭圆嵌入式/万向头



POWER 功率: 2x12W
CUTOUT 开孔尺寸: 60x130mm
CRI 显色指数 ≥ 98
MATERIAL 材质: 压铸铝
CHIP 光源: COB
UGR 防眩指数 > 10
VOLTAGE 电压: AC85-265V

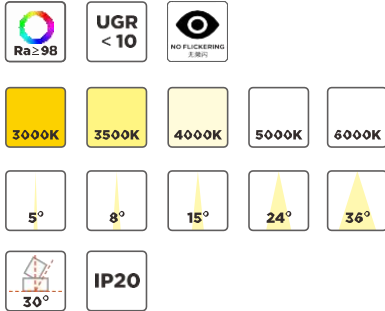


ANTI-GLARE CUP COLOR 防眩杯颜色




ANTI-GLARE ACCESSORIES 面环配件




OPTICAL FILTER 滤光片



LIGHT DISTRIBUTION CURVE 配光曲线





BEAM ANGLE/光束角: 5° BEAM ANGLE/光束角: 8° BEAM ANGLE/光束角: 15°




BEAM ANGLE/光束角: 24° BEAM ANGLE/光束角: 36°


LS-213DR 椭圆无边框/万向头



POWER 功率: 2x12W
CUTOUT 开孔尺寸: 60x130mm
CRI 显色指数 ≥ 98
MATERIAL 材质: 压铸铝
CHIP 光源: COB
UGR 防眩指数 > 10
VOLTAGE 电压: AC85-265V

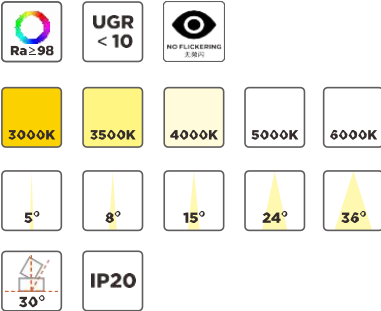


ANTI-GLARE CUP COLOR 防眩杯颜色




ANTI-GLARE ACCESSORIES 面环配件




OPTICAL FILTER 滤光片



LIGHT DISTRIBUTION CURVE 配光曲线





BEAM ANGLE/光束角: 5° BEAM ANGLE/光束角: 8° BEAM ANGLE/光束角: 15°




BEAM ANGLE/光束角: 24° BEAM ANGLE/光束角: 36°


LS-213A 圆形嵌入式/可调



POWER 功率: 12W
CUTOUT 开孔尺寸: 55mm
CRI 显色指数 ≥ 98
MATERIAL 材质: 压铸铝
CHIP 光源: COB
UGR 防眩指数 > 10
VOLTAGE 电压: AC85-265V

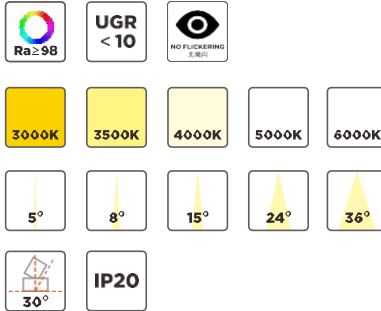


ANTI-GLARE CUP COLOR 防眩杯颜色




ANTI-GLARE ACCESSORIES 面环配件




OPTICAL FILTER 滤光片



LIGHT DISTRIBUTION CURVE 配光曲线





BEAM ANGLE/光束角: 5° BEAM ANGLE/光束角: 8° BEAM ANGLE/光束角: 15°




BEAM ANGLE/光束角: 24° BEAM ANGLE/光束角: 36°


LS-213D 圆形无边框/可调



POWER 功率: 12W
CUTOUT 开孔尺寸: 55mm
CRI 显色指数 ≥ 98
MATERIAL 材质: 压铸铝
CHIP 光源: COB
UGR 防眩指数 > 10
VOLTAGE 电压: AC85-265V

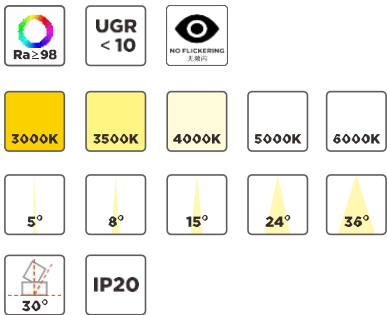


ANTI-GLARE CUP COLOR 防眩杯颜色




ANTI-GLARE ACCESSORIES 面环配件





OPTICAL FILTER 滤光片




LIGHT DISTRIBUTION CURVE 配光曲线

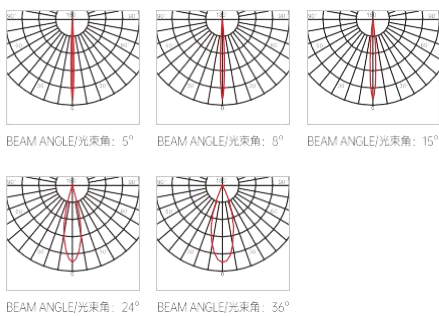


LS-201N 圆形嵌入式/直角



POWER 功率: 8W
CUTOUT 开孔尺寸: 45mm
CRI 显色指数 ≥ 98
MATERIAL 材质: 压铸铝
CHIP 光源: COB
UGR 防眩指数 > 10
VOLTAGE 电压: AC85-265V

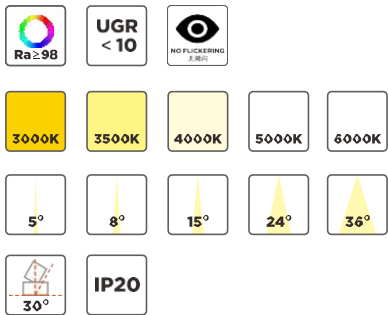


ANTI-GLARE CUP COLOR 防眩杯颜色




ANTI-GLARE ACCESSORIES 面环配件





OPTICAL FILTER 滤光片




LIGHT DISTRIBUTION CURVE 配光曲线

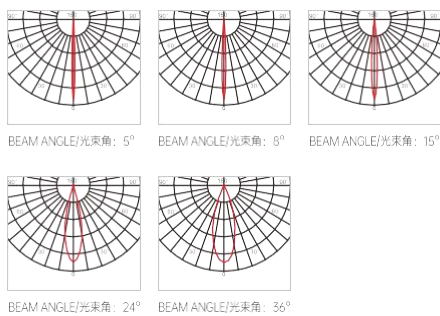


LS-201R 圆形无边框/直角



POWER 功率: 8W
CUTOJT 开孔尺寸: 45mm
CRI 显色指数 ≥ 98
MATERIAL 材质: 压铸铝
CHIP 光源: COB
UGR 防眩指数 > 10
VOLTAGE 电压: AC85-265V

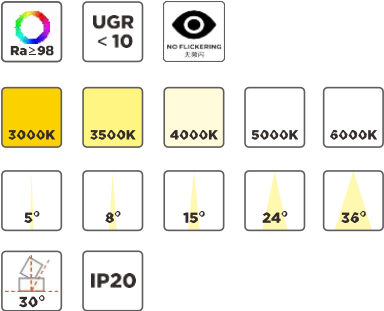


ANTI-GLARE CUP COLOR 防眩杯颜色




ANTI-GLARE ACCESSORIES 面环配件




OPTICAL FILTER 滤光片



LIGHT DISTRIBUTION CURVE 配光曲线





BEAM ANGLE/光束角: 5° BEAM ANGLE/光束角: 8° BEAM ANGLE/光束角: 15°




BEAM ANGLE/光束角: 24° BEAM ANGLE/光束角: 36°


LS-202N 方形嵌入式/直角



POWER 功率: 8W
CUTOJT 开孔尺寸: 45x45mm
CRI 显色指数 ≥ 98
MATERIAL 材质: 压铸铝
CHIP 光源: COB
UGR 防眩指数 > 10
VOLTAGE 电压: AC85-265V

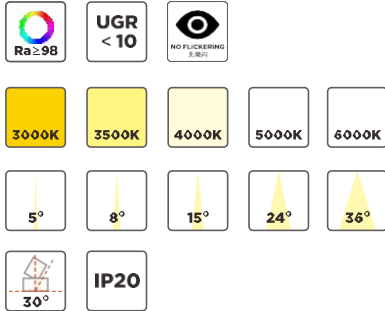


ANTI-GLARE CUP COLOR 防眩杯颜色




ANTI-GLARE ACCESSORIES 面环配件




OPTICAL FILTER 滤光片



LIGHT DISTRIBUTION CURVE 配光曲线





BEAM ANGLE/光束角: 5° BEAM ANGLE/光束角: 8° BEAM ANGLE/光束角: 15°




BEAM ANGLE/光束角: 24° BEAM ANGLE/光束角: 36°


LS-202R 方形无边框/直角



POWER 功率: 8W
CUTOJT 开孔尺寸: 45x45mm
CRI 显色指数 ≥ 98
MATERIAL 材质: 压铸铝
CHIP 光源: COB
UGR 防眩指数 > 10
VOLTAGE 电压: AC85-265V

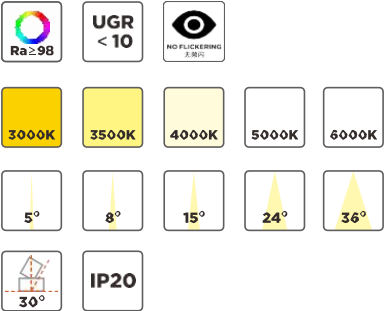


ANTI-GLARE CUP COLOR 防眩杯颜色




ANTI-GLARE ACCESSORIES 面环配件




OPTICAL FILTER 滤光片



LIGHT DISTRIBUTION CURVE 配光曲线





BEAM ANGLE/光束角: 5° BEAM ANGLE/光束角: 8° BEAM ANGLE/光束角: 15°




BEAM ANGLE/光束角: 24° BEAM ANGLE/光束角: 36°


LS-203DN 椭圆嵌入式/万向头



POWER 功率: 2x8W
CUTOJT 开孔尺寸: 60x130mm
CRI 显色指数 ≥ 98
MATERIAL 材质: 压铸铝
CHIP 光源: COB
UGR 防眩指数 > 10
VOLTAGE 电压: AC85-265V

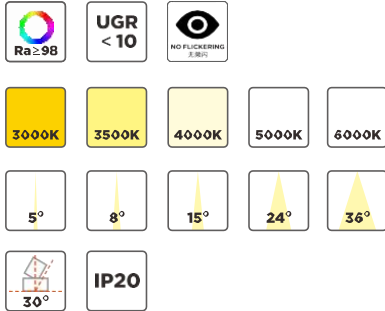


ANTI-GLARE CUP COLOR 防眩杯颜色




ANTI-GLARE ACCESSORIES 面环配件




OPTICAL FILTER 滤光片



LIGHT DISTRIBUTION CURVE 配光曲线





BEAM ANGLE/光束角: 5° BEAM ANGLE/光束角: 8° BEAM ANGLE/光束角: 15°




BEAM ANGLE/光束角: 24° BEAM ANGLE/光束角: 36°

LS-203DR 椭圆无边框/万向头

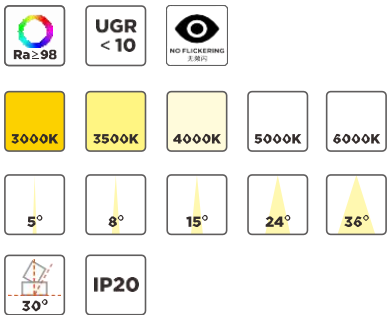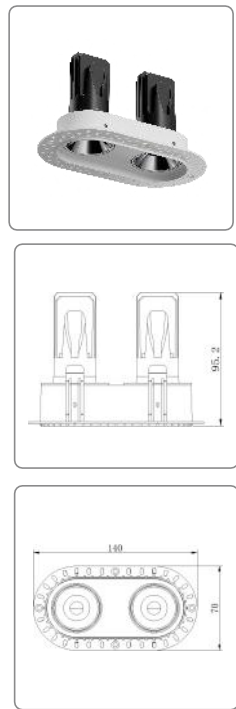


ANTI-GLARE CUP COLOR 防眩杯颜色




ANTI-GLARE ACCESSORIES 面环配件



OPTICAL FILTER 滤光片





LIGHT DISTRIBUTION CURVE 配光曲线

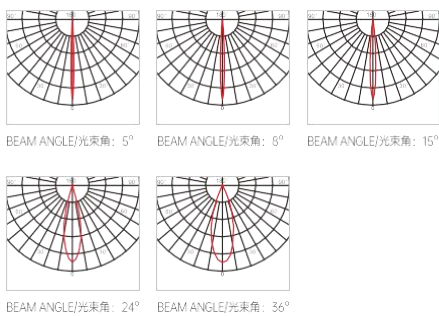


POWER 功率: 2x8W
CUTOUT 开孔尺寸: 60x130mm
CRI 显色指数 ≥ 98
MATERIAL 材质: 压铸铝
CHIP 光源: COB
UGR 防眩指数 > 10
VOLTAGE 电压: AC85-265V

LS-202N 圆形嵌入式/可调角

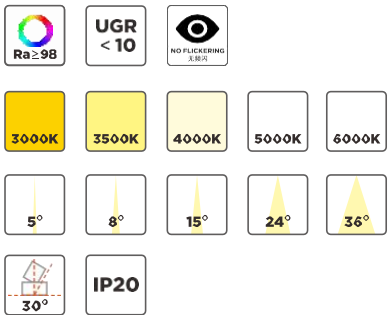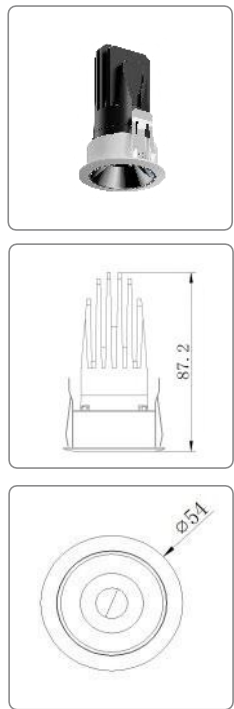


ANTI-GLARE CUP COLOR 防眩杯颜色




ANTI-GLARE ACCESSORIES 面环配件



OPTICAL FILTER 滤光片






LIGHT DISTRIBUTION CURVE 配光曲线

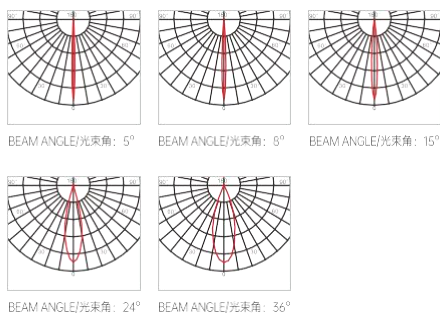


POWER 功率: 8W
CUTOUT 开孔尺寸: 55mm
CRI 显色指数 ≥ 98
MATERIAL 材质: 压铸铝
CHIP 光源: COB
UGR 防眩指数 > 10
VOLTAGE 电压: AC85-265V

LS-202R 圆形无边框/可调角

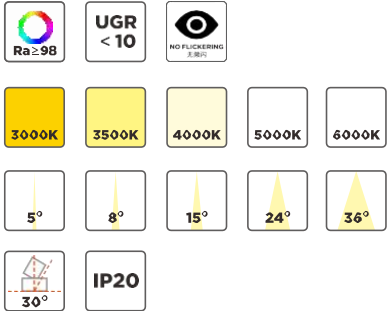


ANTI-GLARE CUP COLOR 防眩杯颜色




ANTI-GLARE ACCESSORIES 面环配件



OPTICAL FILTER 滤光片



LIGHT DISTRIBUTION CURVE 配光曲线

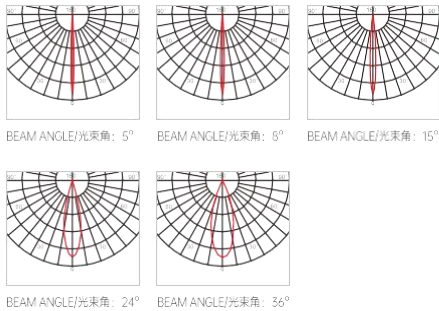

POWER 功率: 8W
CUTOUT 开孔尺寸: 55mm
CRI 显色指数 ≥ 98
MATERIAL 材质: 压铸铝
CHIP 光源: COB
UGR 防眩指数 > 10
VOLTAGE 电压: AC85-265V



SKY SERIES

天幕系列

Slim lamp body design, greatly reducing the height of the lamp, high and low ceiling easily adaptable. Customised OpticalCustomised optics, large light-emitting surface, wide light transmission range, brighter space. High-efficiency aluminium radiator, can quickly reduce the temperature of the whole lamp, thermal conductivity.High-efficiency aluminium radiator, can quickly reduce the temperature of the whole lamp, thermal conductivity energy consumption, prolong the service life of the lamps and lanterns.Translated with DeepL.com (free version).

纤薄灯体设计，大大缩小了灯具高度，高矮吊顶轻松适应。定制款光学贴片，超大发光面，透光范围广，空间更亮。高效铝材散热器，能够快速降低整灯温度，导热性能耗，延长灯具使用寿命。





SKY SERIES
Down Light


天幕系列筒灯



LT-9801 圆形嵌入式




POWER	功率: 9W
CUTOUT	开孔尺寸: 75mm
CRI	显色指数 ≥ 98
MATERIAL	材质: 压铸铝
CHIP	光源: SMD
LIGHT EFFICIENCY	光效: 100Lm/W(定制光源)
VOLTAGE	电压: AC85-265V

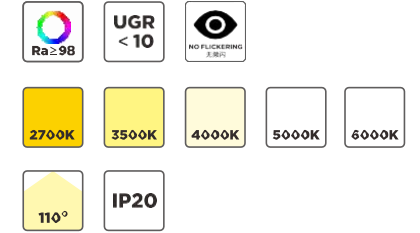

COLOR OF ANTI-GLARE CUP 防眩杯颜色






LIGHT DISTRIBUTION CURVE 配光曲线



BEAM ANGLE/光束角: 110°


LT-9802 圆形嵌入式

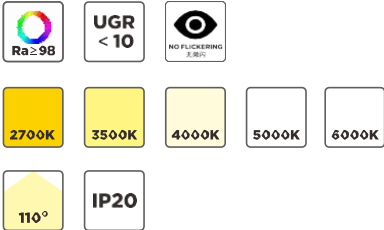

COLOR OF ANTI-GLARE CUP 防眩杯颜色






LIGHT DISTRIBUTION CURVE 配光曲线



BEAM ANGLE/光束角：110°

POWER	功率：15W
CUTOQT	开孔尺寸：95mm
CRI	显色指数 ≥ 98
MATERIAL	材质：压铸铝
CHIP	光源：SMD
LIGHT EFFICIENCY	光效：100Lm/W(定制光源)
VOLTAGE	电压：AC85-265V


LT-9803 圆形嵌入式

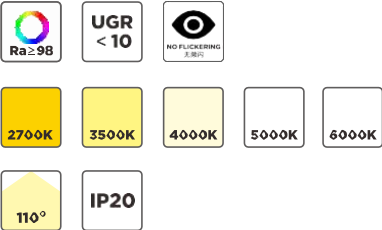

COLOR OF ANTI-GLARE CUP 防眩杯颜色







LIGHT DISTRIBUTION CURVE 配光曲线



BEAM ANGLE/光束角：110°





POWER	功率：24W
CUTOQT	开孔尺寸：24mm
CRI	显色指数 ≥ 98
MATERIAL	材质：压铸铝
CHIP	光源：SMD
LIGHT EFFICIENCY	光效：100Lm/W(定制光源)
VOLTAGE	电压：AC85-265V

LT-9804 圆形嵌入式

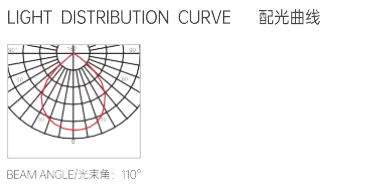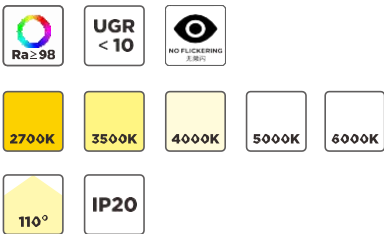


POWER	功率: 35W
CUTOUT	开孔尺寸: 150mm
CRI	显色指数 ≥ 98
MATERIAL	材质: 压铸铝
CHIP	光源: SMD
LIGHT EFFICIENCY	光效: 100Lm/W(定制光源)
VOLTAGE	电压: AC85-265V

LT-9805 圆形嵌入式

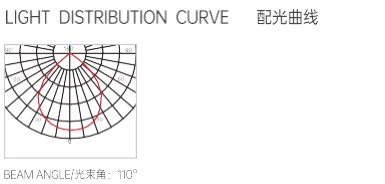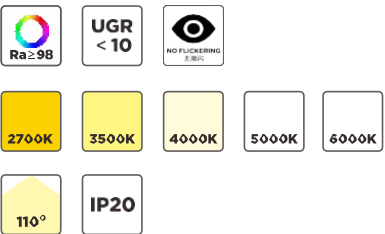

POWER	功率: 45W
CUTOUT	开孔尺寸: 180mm
CRI	显色指数 ≥ 98
MATERIAL	材质: 压铸铝
CHIP	光源: SMD
LIGHT EFFICIENCY	光效: 100Lm/W(定制光源)
VOLTAGE	电压: AC85-265V

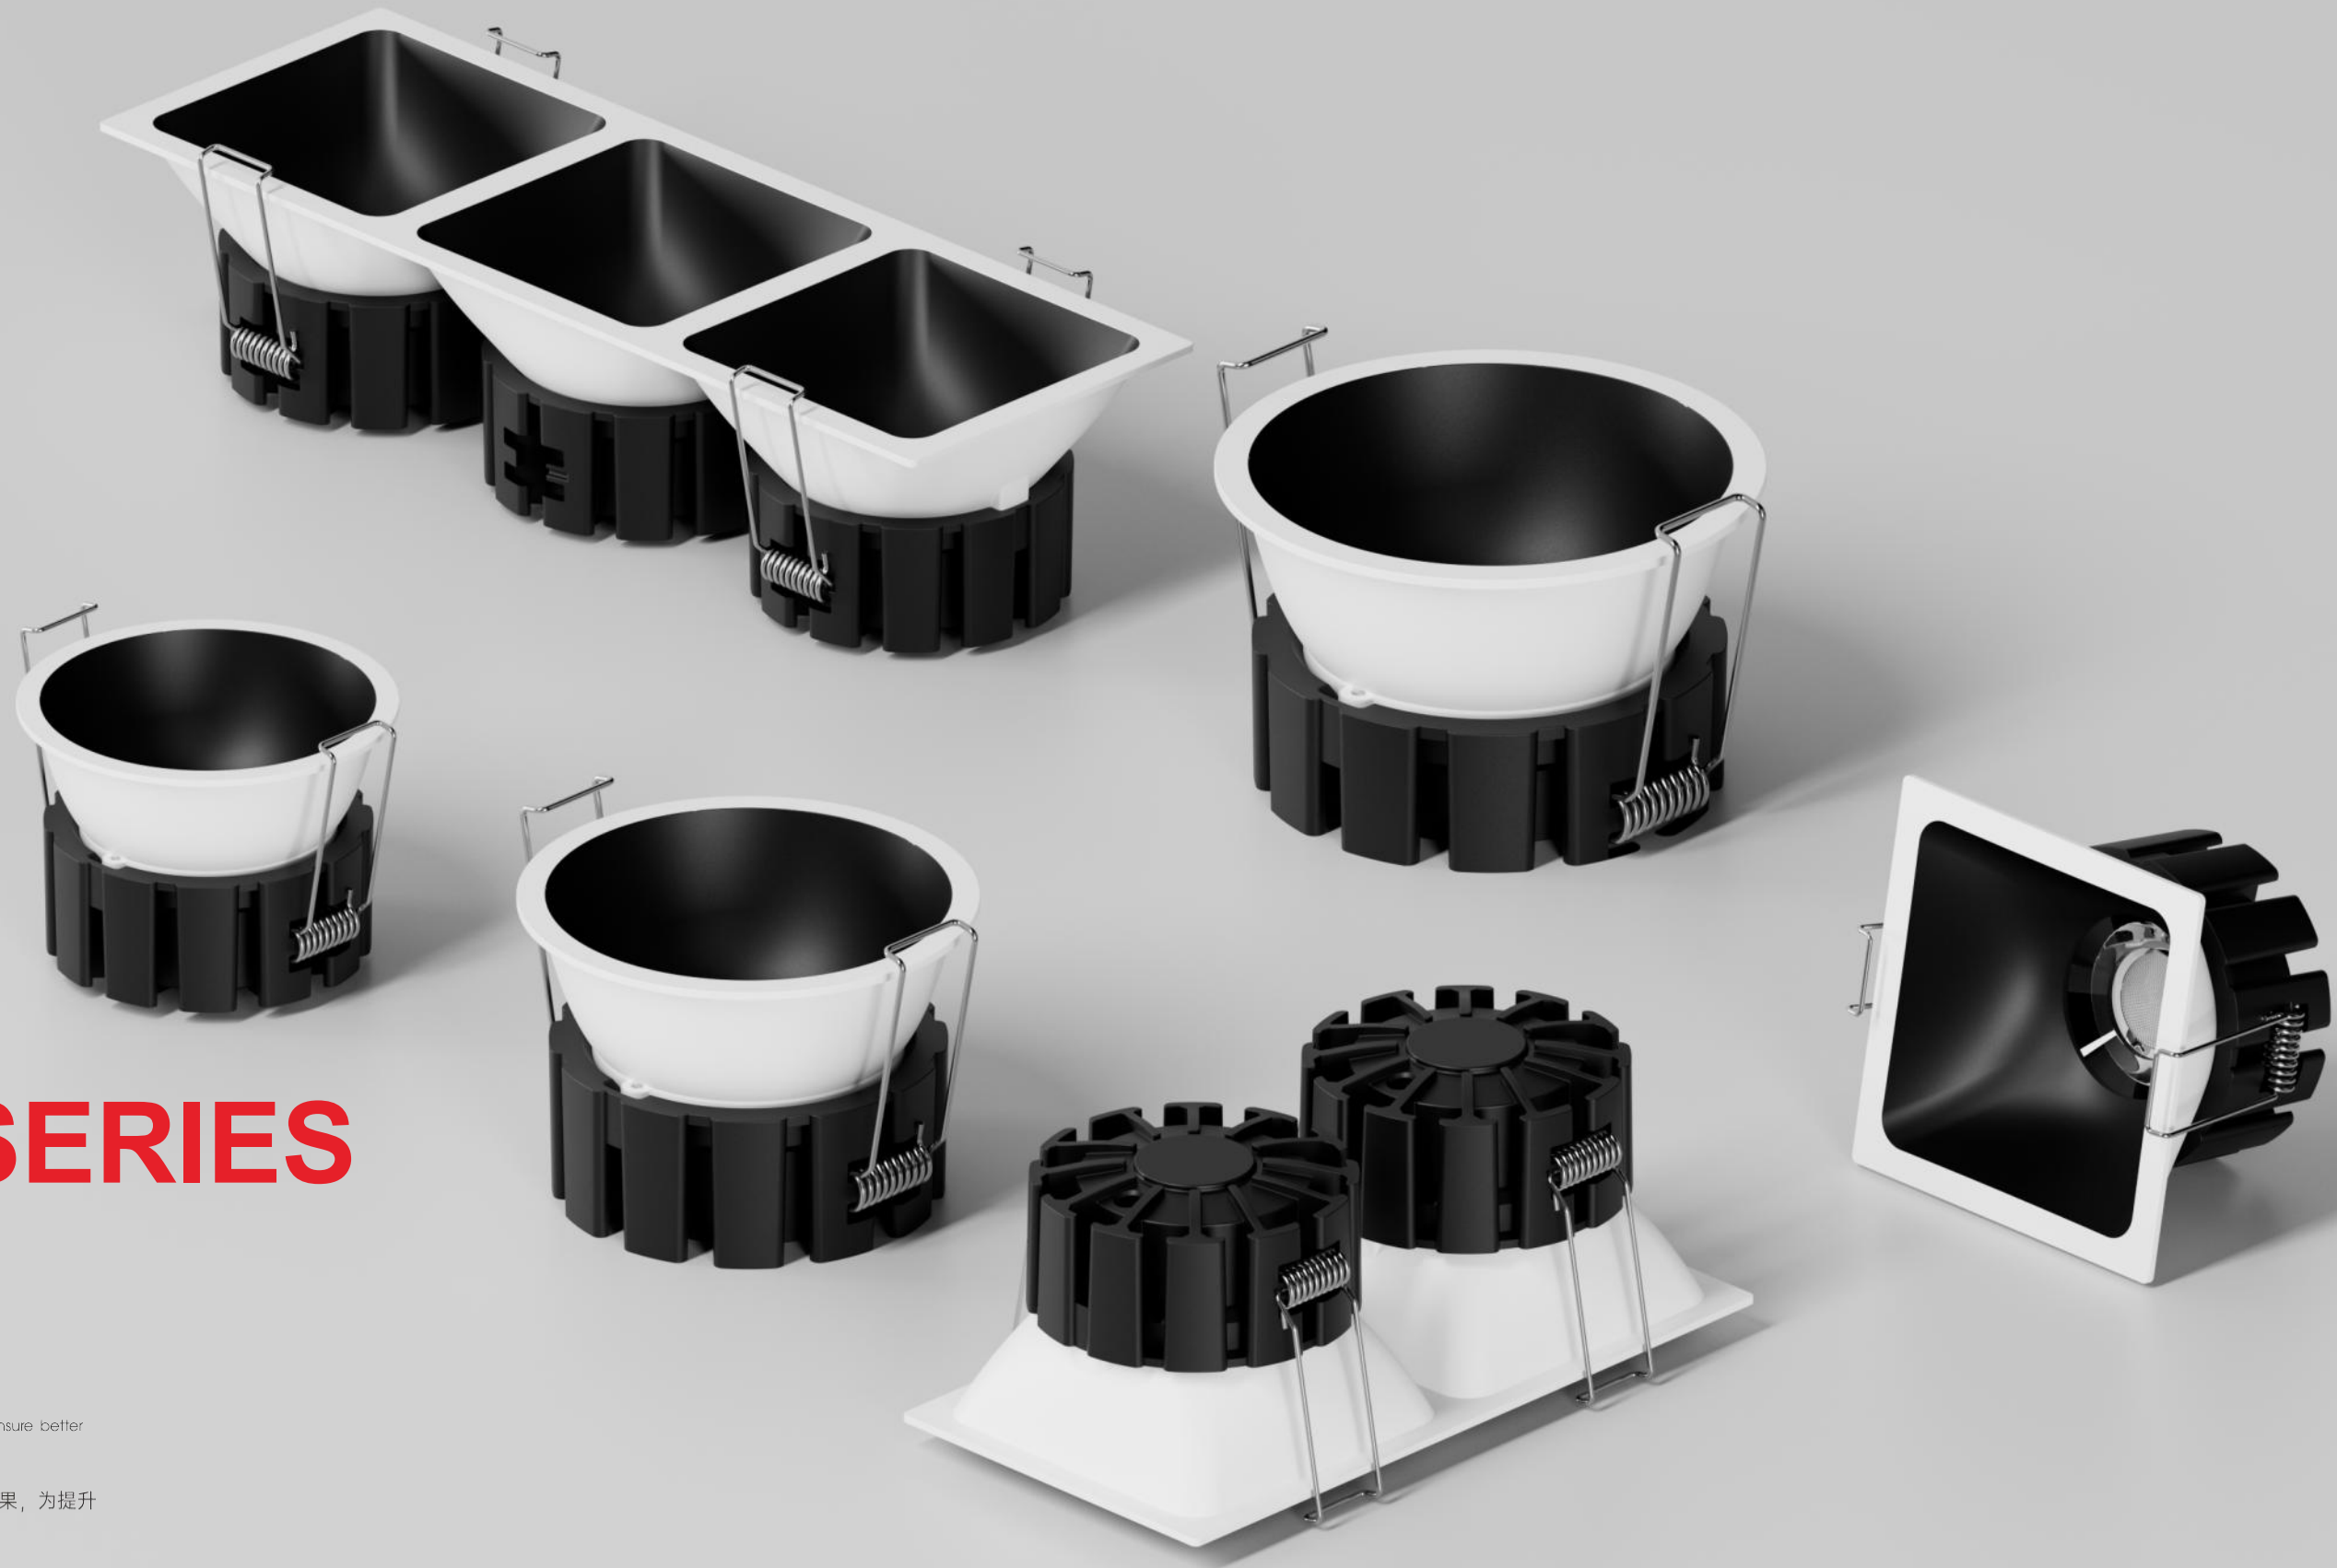

CLOUD SERIES

云端系列

Multi-opening face ring optional, rugged shape radiator to ensure better heat dissipation, to enhance the lighting time protection.

多开孔面环可选，粗犷外形散热器，保证更佳散热效果，为提升照明时效保驾护航。

UPGRADABLE WATERPROOF DESIGN

可升级防水设计

Precision structure, waterproof and dustproof. Comply with European residential standards. Protect the lamp body from water vapor attack, can withstand the bathroom, kitchen, balcony lamps vulnerable to water, fog, oil smoke and other corrosive environment test, durable. It can withstand the bathroom, kitchen, balcony lights are vulnerable to water, fog, fumes and other corrosive environment test, durable.

精密结构，防水防尘。符合欧洲住宅标准 保护灯体不受水汽侵袭，可经受浴室，厨房，阳台灯易受水，雾，油烟等腐蚀的环境考验，经久耐用。




DEEP ANTI-GLARE

深度防眩·高度光效

The light source is deeply hidden design, effectively preventing glare. Light through the lens, in the anti-glare cup filtered to the next irradiation. Lamp body out of the light evenly and softly, both to achieve the high standard of illumination effect, while the light sense of comfort, reduce the eye by the glare stimulation.

光源深藏设计，有效防止炫光。光线经过透镜、在防眩杯滤后对下照射。灯体出光均匀柔和，既能达到的高标准照亮效果，同时光感舒适度，减少眼部受到眩光刺激。

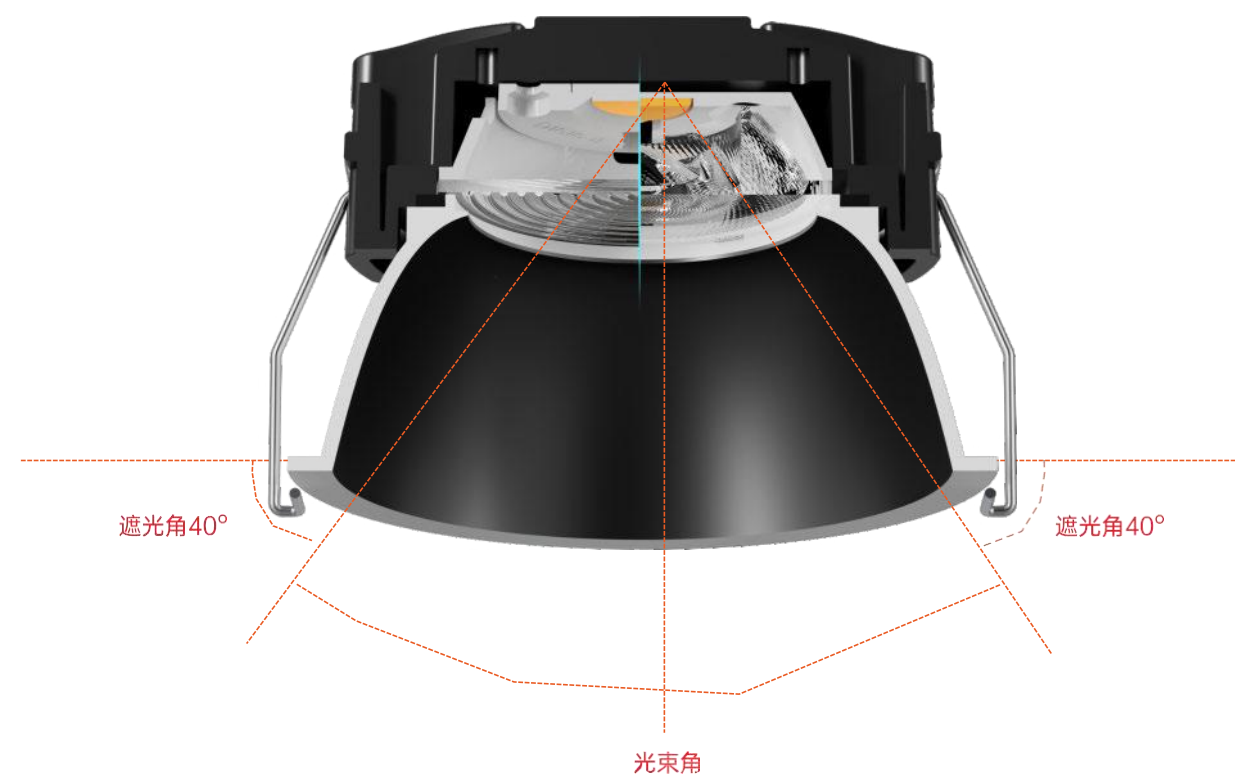

菲尼尔透镜

防眩螺纹结构设计，聚光效果好，出光明亮均匀增加防眩效果。



平光透镜



光线折射效率高，光束平缓柔和。

CLOUD SERIES
Downlight

—
云端系列筒灯



LT-901N 圆形嵌入式




POWER 功率: 12W
CUTOUT 开孔尺寸: 75mm
CRI 显色指数 ≥ 98
MATERIAL 材质: 压铸铝
CHIP 光源: SMD/COB
UGR 防眩指数 > 10
VOLTAGE 电压: AC85-265V



ANTI-GLARE CUP COLOR 防眩杯颜色





LIGHT DISTRIBUTION CURVE 配光曲线



BEAM ANGLE/光束角: 100°

LT-902N 圆形嵌入式



- POWER

CUTOUT

CRI

MATERIAL

CHIP

UGR

VOLTAGE
- 功率: 20W

开孔尺寸: 95mm

显色指数 ≥ 98

材质: 压铸铝

光源: SMD/COB

防眩指数 > 10


电压: AC85-265V



ANTI-GLARE CUP COLOR 防眩杯颜色





LIGHT DISTRIBUTION CURVE 配光曲线



BEAM ANGLE/光束角: 100°

LT-903N 圆形嵌入式



- POWER

CUTOUT

CRI

MATERIAL

CHIP

UGR

VOLTAGE
- 功率: 30W

开孔尺寸: 125mm

显色指数 ≥ 98

材质: 压铸铝

光源: SMD/COB

防眩指数 > 10


电压: AC85-265V



ANTI-GLARE CUP COLOR 防眩杯颜色




LIGHT DISTRIBUTION CURVE 配光曲线



BEAM ANGLE/光束角: 100°

LT-911N 圆形嵌入式

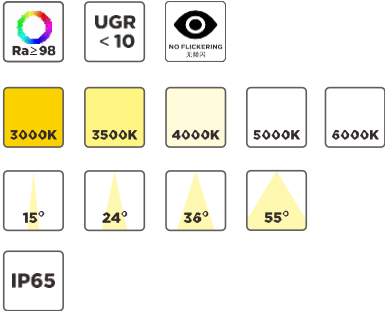


POWER 功率：12W
CUTOUT 开孔尺寸：75X75mm
CRI 显色指数 ≥ 98
MATERIAL 材质：压铸铝
CHIP 光源：SMD/COB
UGR 防眩指数 > 10
VOLTAGE 电压：AC85-265V


ANTI-GLARE CUP COLOR 防眩杯颜色



LIGHT DISTRIBUTION CURVE 配光曲线



LT-912N 圆形嵌入式

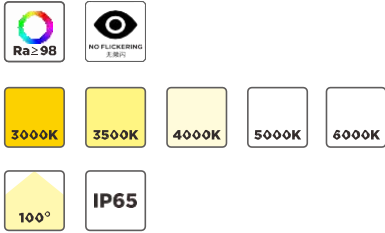


POWER 功率：20W
CUTOUT 开孔尺寸：95X95mm
CRI 显色指数 ≥ 98
MATERIAL 材质：压铸铝
CHIP 光源：SMD/COB
UGR 防眩指数 > 10
VOLTAGE 电压：AC85-265V


ANTI-GLARE CUP COLOR 防眩杯颜色



LIGHT DISTRIBUTION CURVE 配光曲线



LT-913N 单头方形

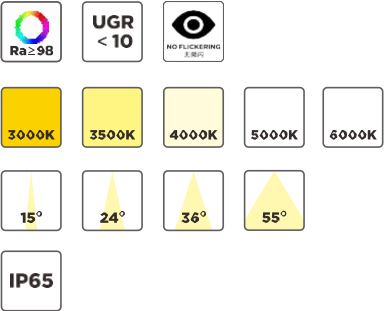


POWER 功率: 30W
CUTOUT 开孔尺寸: 125X125mm
CRI 显色指数 ≥ 98
MATERIAL 材质: 压铸铝
CHIP 光源: SMD/COB
UGR 防眩指数 > 10
VOLTAGE 电压: AC85-265V


ANTI-GLARE CUP COLOR 防眩杯颜色



LIGHT DISTRIBUTION CURVE 配光曲线

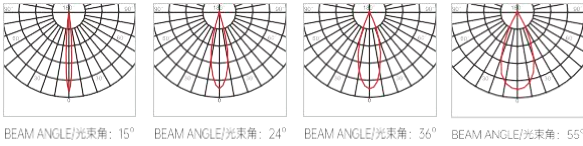

LT-911F 双头方形

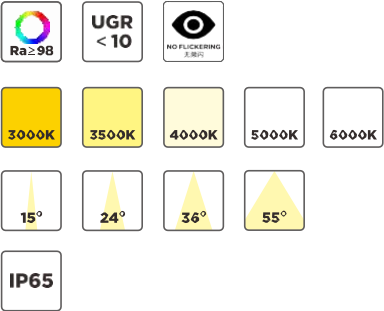


POWER 功率: 2x12W
CUTOUT 开孔尺寸: 150x75mm
CRI 显色指数 ≥ 98
MATERIAL 材质: 压铸铝
CHIP 光源: SMD/COB
UGR 防眩指数 > 10
VOLTAGE 电压: AC85-265V


ANTI-GLARE CUP COLOR 防眩杯颜色



LIGHT DISTRIBUTION CURVE 配光曲线



LT-911T 三头方形




POWER 功率: 3x12W
CUTOUT 开孔尺寸: 225x75mm
CRI 显色指数 ≥ 98
MATERIAL 材质: 压铸铝
CHIP 光源: SMD/COB
UGR 防眩指数 > 10
VOLTAGE 电压: AC85-265V


ANTI-GLARE CUP COLOR 防眩杯颜色




LIGHT DISTRIBUTION CURVE 配光曲线




BEAM ANGLE/光束角: 15°




BEAM ANGLE/光束角: 24°



BEAM ANGLE/光束角: 36°



BEAM ANGLE/光束角: 55°

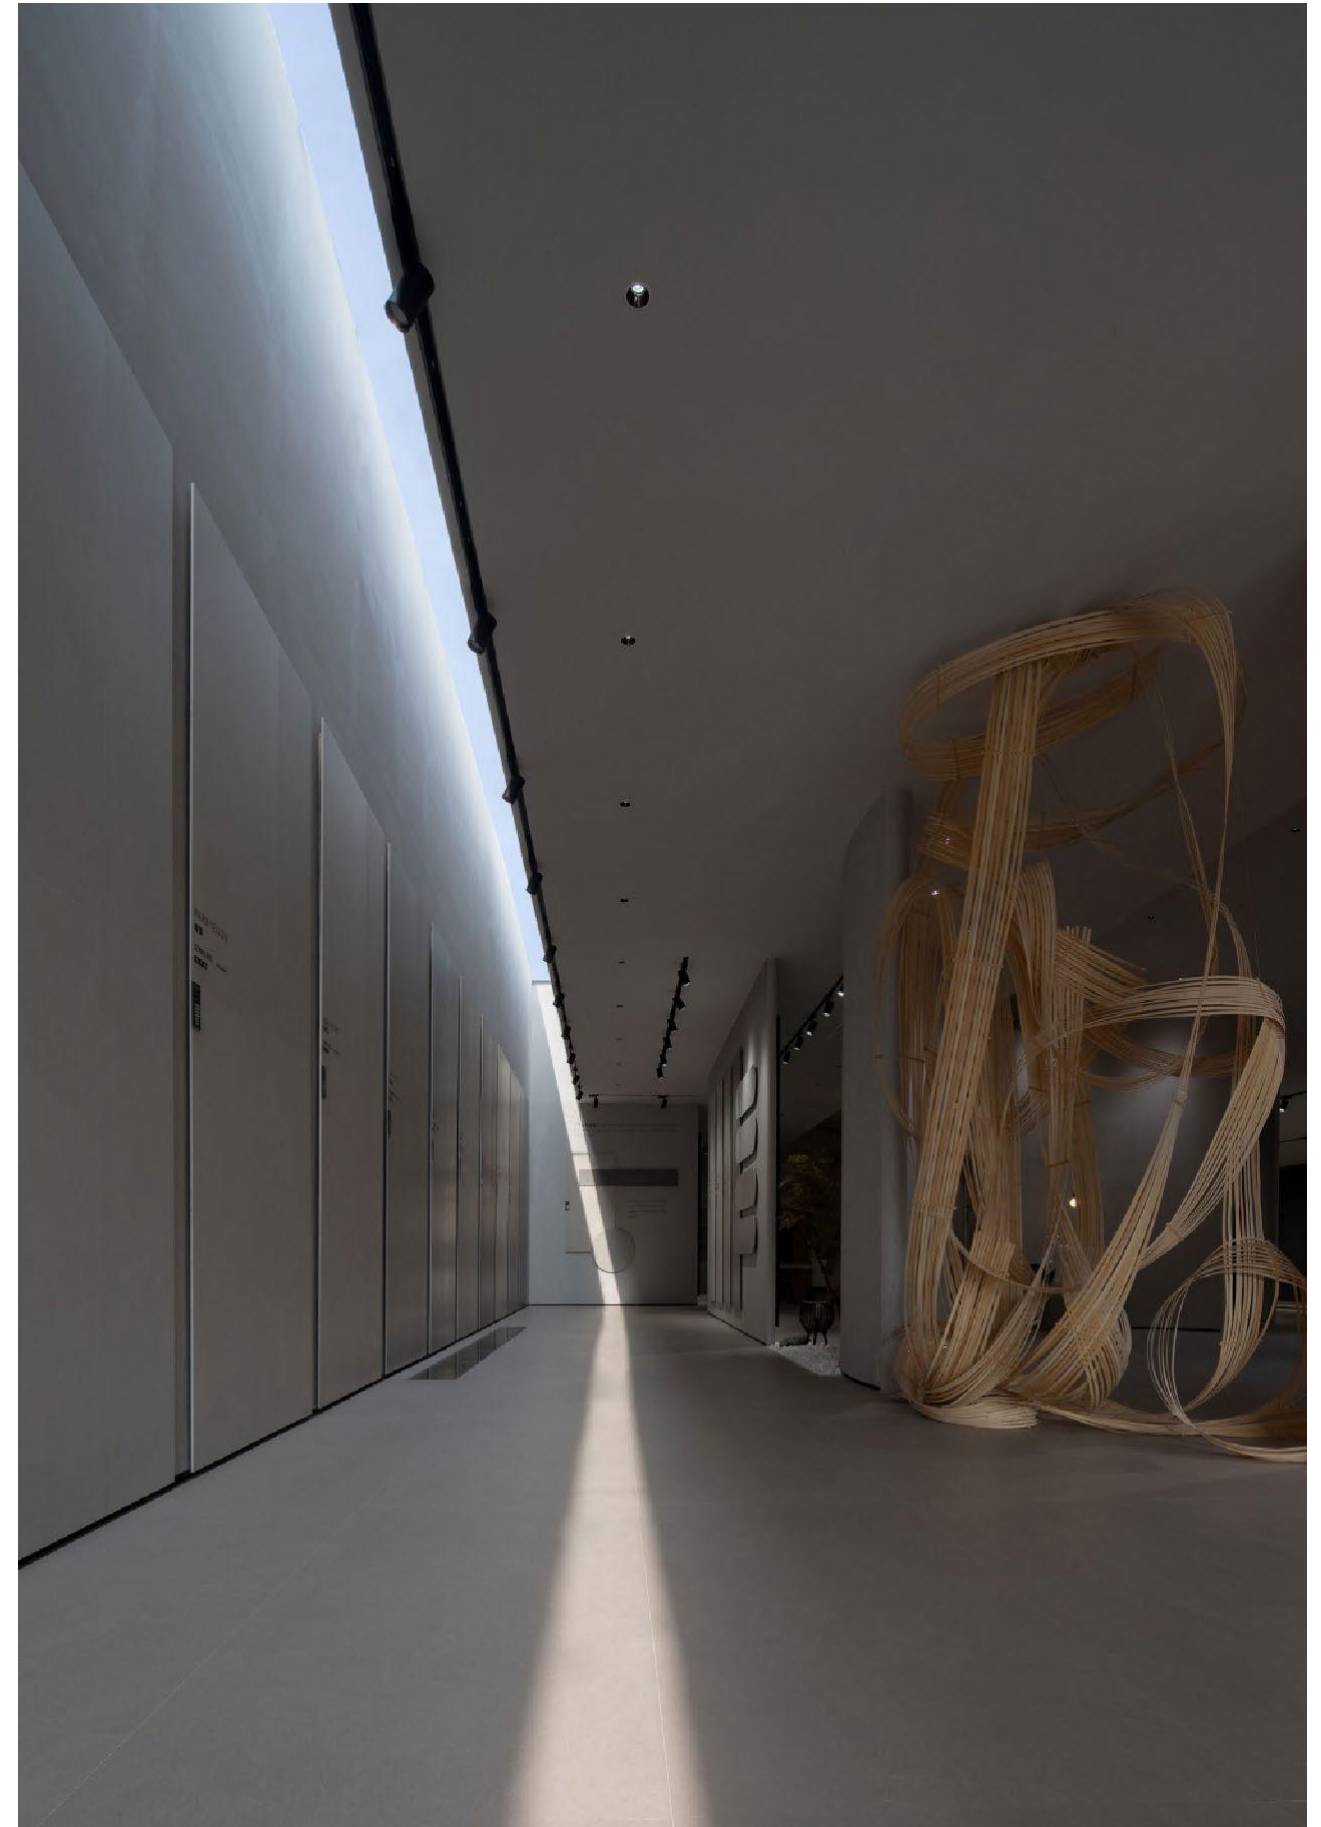

AURORA SERIES

极光系列

Frameless large curved surface light cup design, smoothly embedded in the ceiling; light source deeply concealed for better anti-glare effect, where you see the light, not the lamp; suitable for various types of decoration needs in residential, villa, and more, achieving a perfect balance of optical and aesthetic effects.

无边框大弧面光杯设计，平滑嵌入天花；光源深藏，更佳防眩效果，见光不见灯，适应住宅、别墅等各类型装饰需求，完美平衡光学、美学效果。





PROFESSIONAL GRADE OPTICAL LENSES

专业级光学透镜

Precise light control, newly developed TIR optical lens, new light guide structure. Increase the efficiency of light refraction, equal distribution of light, more uniform light, light spot! Pure and free of stray light, bringing people a comfortable visual experience.

精准控光，全新研制的TIR光学透镜，全新的导光结构，增加光线折射效率，光线等量分布，出光更均匀，光斑纯净无杂光，给人们带来舒适的视觉感受。

PRODUCT SPLIT DIAGRAM

产品细节拆分图解





AURORA SERIES

Downlight


极光系列筒灯



LD-321N 斜面




POWER 功率: 7W
CUTOUT 开孔尺寸: 55mm
CRI 显色指数 ≥ 98
MATERIAL 材质: 压铸铝
CHIP 光源: 智宏通25 COB
UGR 防眩指数 > 10
VOLTAGE 电压: AC85-265V

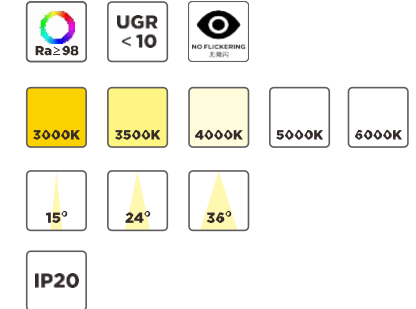



COLOR OF ANTI-GLARE CUP 防眩杯颜色





LIGHT DISTRIBUTION CURVE 配光曲线

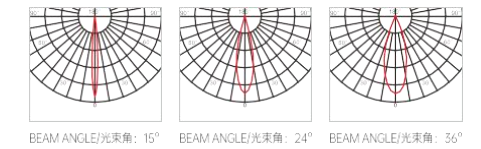



LD-331N 弧面





POWER 功率: 7W
CUTOUT 开孔尺寸: 55mm
CRI 显色指数 ≥ 98
MATERIAL 材质: 压铸铝
CHIP 光源: 智宏通25 COB
UGR 防眩指数 > 10
VOLTAGE 电压: AC85-265V

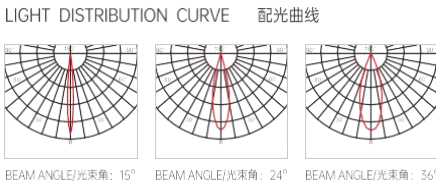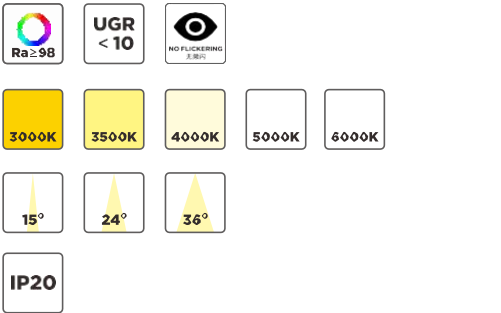



LD-323N 斜面分体





POWER 功率: 12W
CUTOUT 开孔尺寸: 75mm
CRI 显色指数 ≥ 98
MATERIAL 材质: 压铸铝
CHIP 光源: 特浩45 COB
UGR 防眩指数 > 10
VOLTAGE 电压: AC85-265V

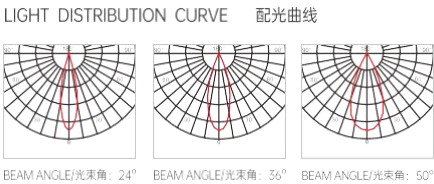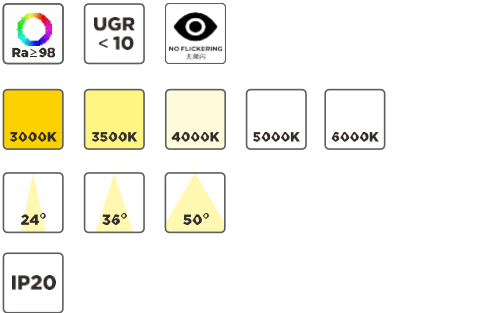



LD-332 弧面分体





POWER 功率: 12W
CUTOUT 开孔尺寸: 75mm
CRI 显色指数 ≥ 98
MATERIAL 材质: 压铸铝
CHIP 光源: 智宏通35 COB
UGR 防眩指数 > 10
VOLTAGE 电压: AC85-265V

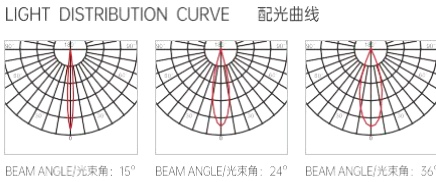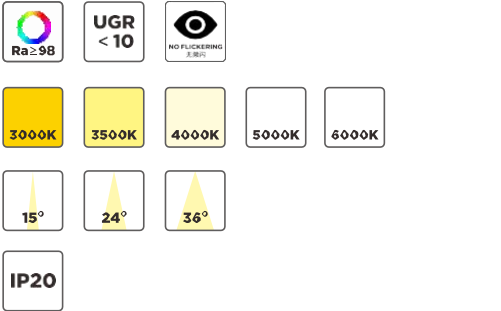



LD-322N 斜面





POWER 功率: 12W
CUTOUT 开孔尺寸: 75mm
CRI 显色指数 ≥ 98
MATERIAL 材质: 压铸铝
CHIP 光源: 智宏通35 COB
UGR 防眩指数 > 10
VOLTAGE 电压: AC85-265V

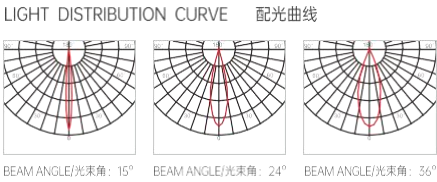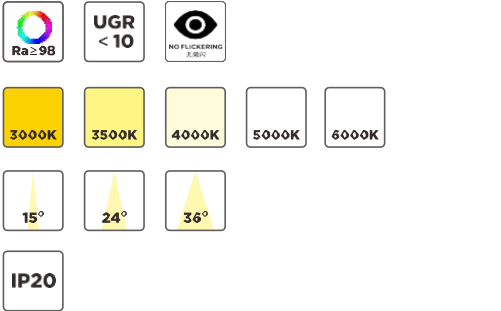

LD-333 弧面分体




POWER 功率: 12W
CUTOUT 开孔尺寸: 75mm
CRI 显色指数 ≥ 98
MATERIAL 材质: 压铸铝
CHIP 光源: 智宏通35 COB
UGR 防眩指数 > 10
VOLTAGE 电压: AC85-265V

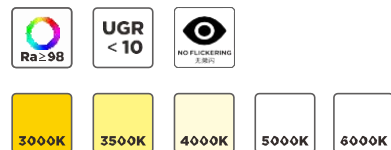


COLOR OF ANTI-GLARE CUP 防眩杯颜色



LIGHT DISTRIBUTION CURVE 配光曲线



BEAM ANGLE/光束角: 24° BEAM ANGLE/光束角: 36° BEAM ANGLE/光束角: 50°

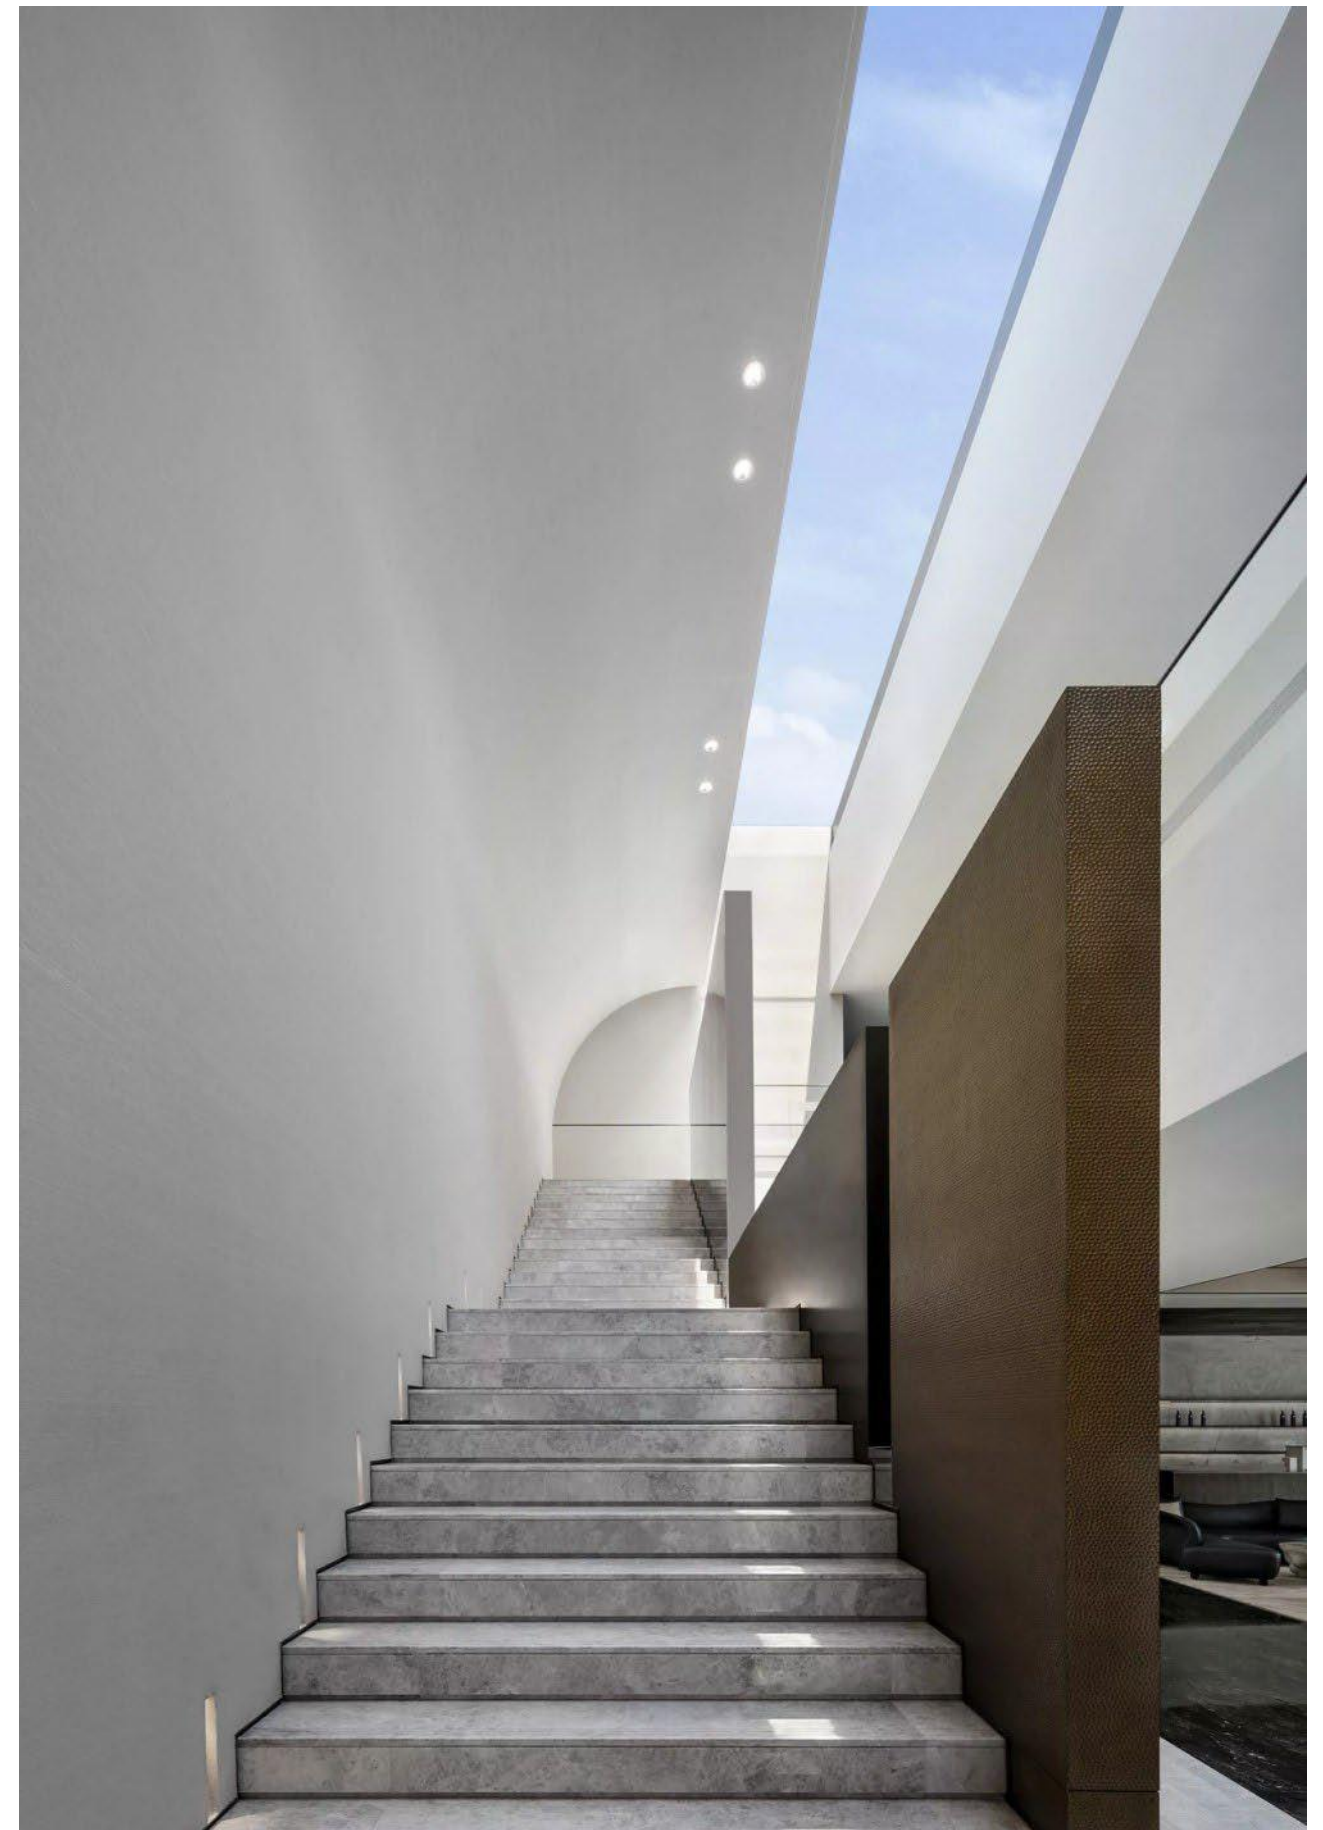



AURORA SERIES

Downlight


极光系列筒灯



LT-912N 圆形嵌入式



POWER 功率: 12W
CUTOUT 开孔尺寸: 75mm
CRI 显色指数 ≥ 98
MATERIAL 材质: 压铸铝
CHIP 光源: 智宏通25 COB/SMD
UGR 防眩指数 > 10
VOLTAGE 电压: AC85-265V

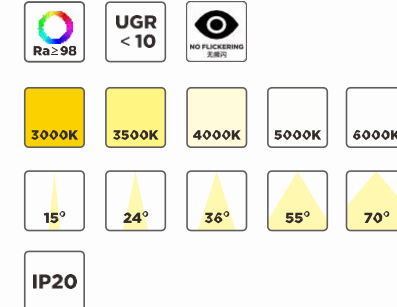


COLOR OF ANTI-GLARE CUP 防眩杯颜色



PRODUCT COLOR 产品颜色



LIGHT DISTRIBUTION CURVE 配光曲线

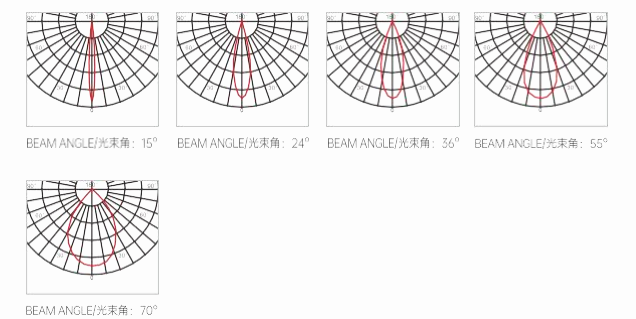

HEGUANG

赫光系列

A multi-faceted ring with a variety of light effects to choose from meets the needs of multiple places for flexible light control; the light source is deeply concealed and designed to provide anti-glare eye protection, making it possible to see the light but not the lights.

多面环，多种光效可选，满足多场所使用需求灵活控光；光源深藏设计，防眩护眼，做到见光不见灯。



UPGRADABLE WATERPROOF DESIGN

可升级防水设计

Precision structure, waterproof and anti-glare, high protection level in line with European residential standardsProtect the lamp body from water vapor, can withstand bathroom, kitchen, balcony lightsEasy to be corroded by water, fog, fumes and other environmental studies, durable.

精密结构，防水防眩，高防护等级符合欧洲住宅标准保护灯体不受水汽侵袭，可经受浴室，厨房，阳台灯易受水，雾，油烟等腐蚀的环境考研，经久耐用。



COMPOUND CONVEX LENS


专业光学透镜

Precise light control, high efficiency of light refraction, through the lens, reflectorAfter the final refraction to the anti-glare cup filter, the light is uniform and soft, presenting perfectbeautiful light spot, can achieve a high standard of visual light comfort, reduceglare damage to both eyes.



精准控光，光线折射效率高，经过透镜、反射器，最后折射到防眩杯滤后，出光均匀柔和，呈现完美光斑，能达到的高标准视觉光感舒适度，减少双眼受到眩光伤害。

HEGUANG SERIES
Downlight


赫光系列筒灯

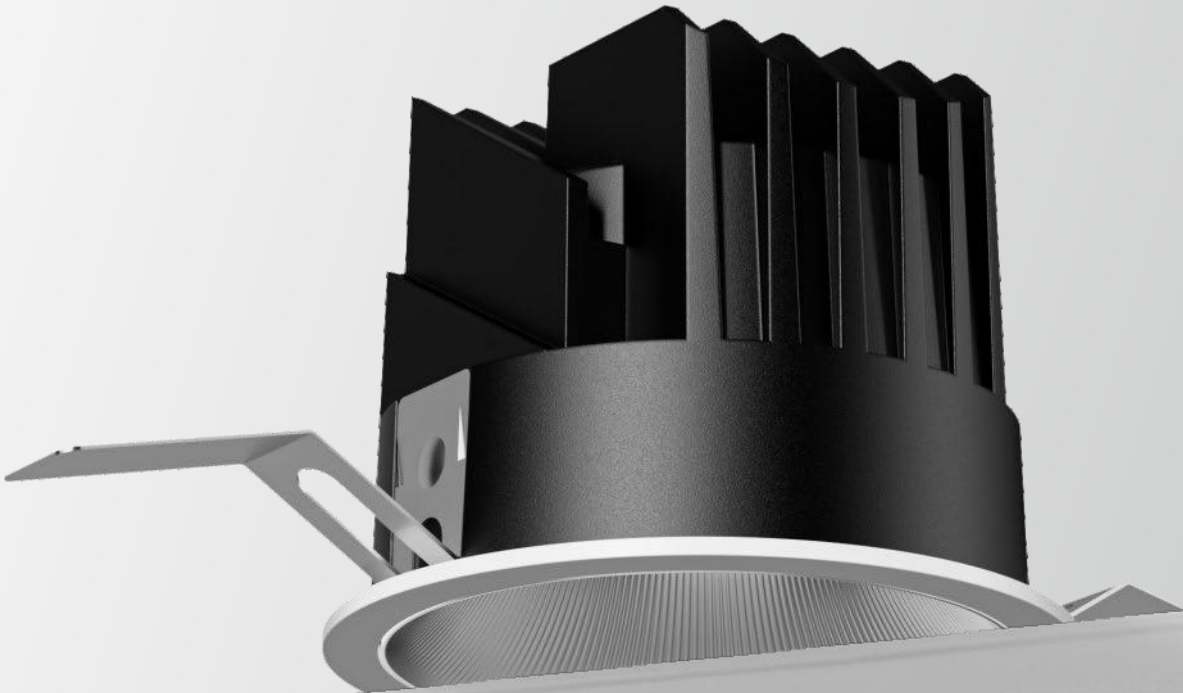

LT-911N 圆形嵌入式




POWER 功率: 12W
CUTOUT 开孔尺寸: 75mm
CRI 显色指数 ≥ 98
MATERIAL 材质: 压铸铝
CHIP 光源: SMD
UGR 防眩指数 > 10
VOLTAGE 电压: AC85-265V

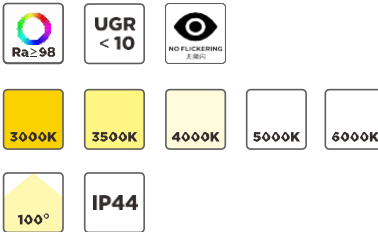



ANTI-GLARE CUP COLOR 防眩杯颜色




LIGHT DISTRIBUTION CURVE 配光曲线



LD-911N 圆形嵌入式




POWER 功率: 12W
CUTOUT 开孔尺寸: 75mm
CRI 显色指数 ≥ 98
MATERIAL 材质: 压铸铝
CHIP 光源: COB
UGR 防眩指数 > 10
VOLTAGE 电压: AC85-265V

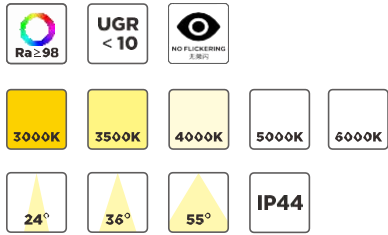



ANTI-GLARE CUP COLOR 防眩杯颜色




LIGHT DISTRIBUTION CURVE 配光曲线



LT-912N 圆形嵌入式




POWER 功率: 20W
CUTOUT 开孔尺寸: 95mm
CRI 显色指数 ≥ 98
MATERIAL 材质: 压铸铝
CHIP 光源: SMD
UGR 防眩指数 > 10
VOLTAGE 电压: AC85-265V

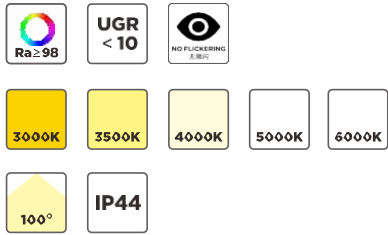



ANTI-GLARE CUP COLOR 防眩杯颜色



LIGHT DISTRIBUTION CURVE 配光曲线



LD-912N 圆形嵌入式



POWER

CUTOUT

CRI

MATERIAL

CHIP

UGR

VOLTAGE

功率: 18W

开孔尺寸: 95mm


显色指数 ≥ 98

材质: 压铸铝

光源: COB

防眩指数 > 10


电压: AC85-265V

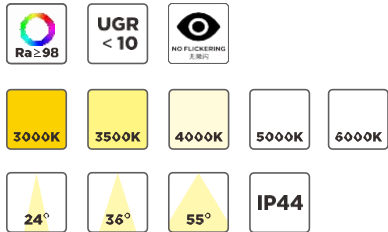

ANTI-GLARE CUP COLOR 防眩杯颜色





LIGHT DISTRIBUTION CURVE 配光曲线



BEAM ANGLE/光束角: 24° BEAM ANGLE/光束角: 36° BEAM ANGLE/光束角: 55°

LT-913N 圆形嵌入式



POWER

CUTOUT

CRI

MATERIAL

CHIP

UGR

VOLTAGE

功率: 30W

开孔尺寸: 120mm


显色指数 ≥ 98

材质: 压铸铝

光源: SMD

防眩指数 > 10


电压: AC85-265V

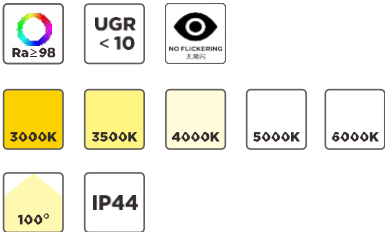

ANTI-GLARE CUP COLOR 防眩杯颜色






LIGHT DISTRIBUTION CURVE 配光曲线



BEAM ANGLE/光束角: 100°


LD-913N 圆形嵌入式

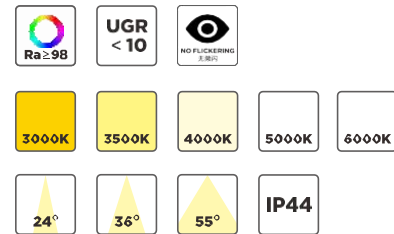

ANTI-GLARE CUP COLOR 防眩杯颜色




LIGHT DISTRIBUTION CURVE 配光曲线



BEAM ANGLE/光束角: 24° BEAM ANGLE/光束角: 36° BEAM ANGLE/光束角: 55°

POWER	功率: 30W
CUTOUT	开孔尺寸: 120mm
CRI	显色指数 ≥ 98
MATERIAL	材质: 压铸铝
CHIP	光源: COB
UGR	防眩指数 > 10
VOLTAGE	电压: AC85-265V

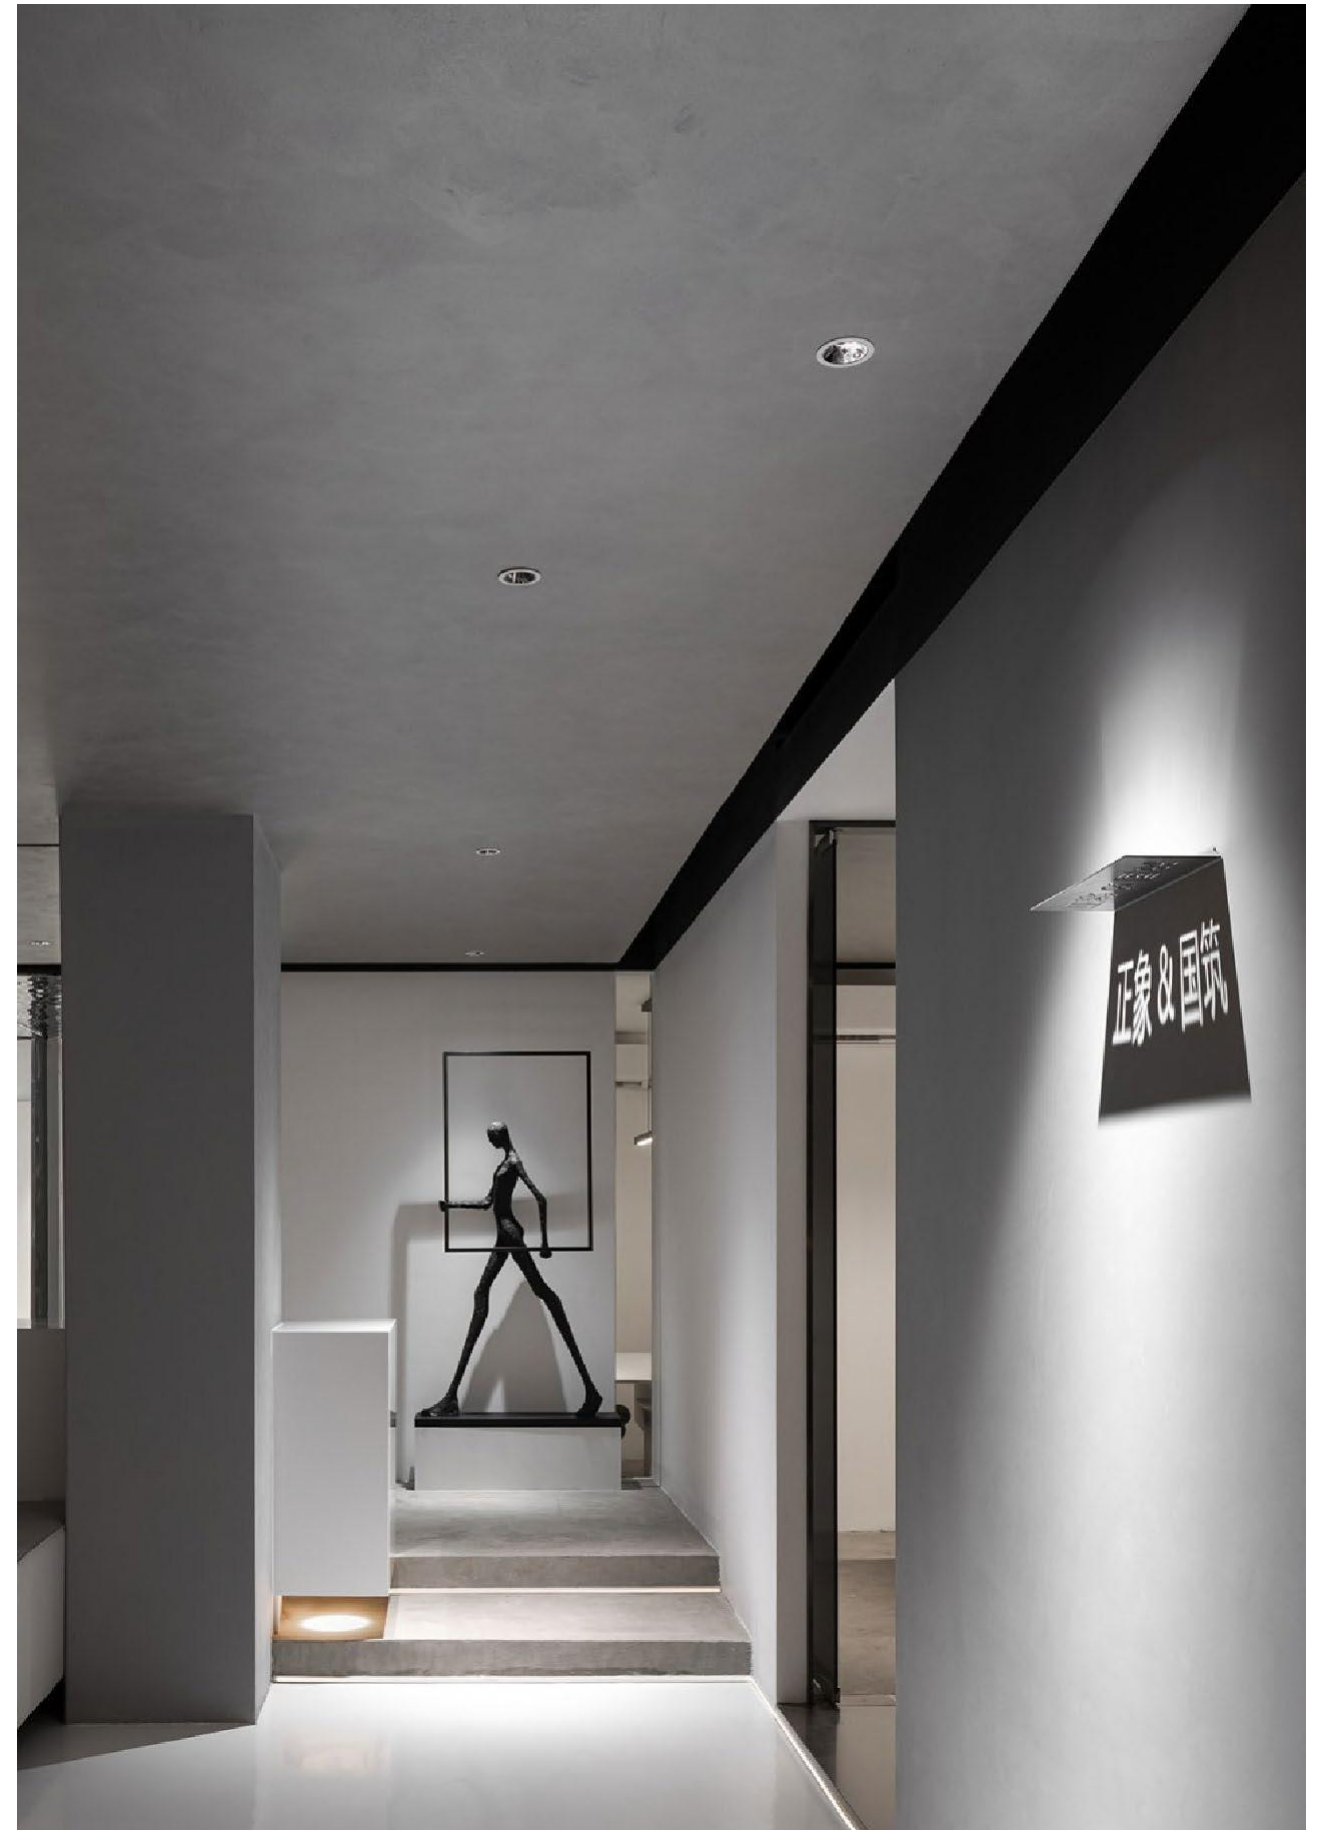

MUGUANG

暮光系列

Traditional simple design is elegant and generous, with high-quality optical accessories, stable and long-lasting working conditions, to provide High illumination support for indoor and outdoor occasions.

传统简洁设计高雅大方，搭配优质光学配件，工况稳定持久，提供室内外多种场合高照度支持。





MUGUANG SERIES
Downlight


暮光系列筒灯



LM-811N 明装吸顶式



POWER 功率: 12W
CRI 显色指数 ≥ 98
MATERIAL 材质: 压铸铝
CHIP 光源: SMD
UGR 防眩指数 > 10
VOLTAGE 电压: AC85-265V

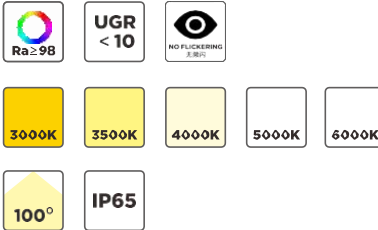


ANTI-GLARE CUP COLOR 防眩杯颜色



PRODUCT COLOR 产品颜色





LIGHT DISTRIBUTION CURVE 配光曲线




BEAM ANGLE/光束角: 100°

LM-801N 明装吸顶式



POWER 功率: 12W
CRI 显色指数 ≥ 98
MATERIAL 材质: 压铸铝
CHIP 光源: COB
UGR 防眩指数 > 10
VOLTAGE 电压: AC85-265V

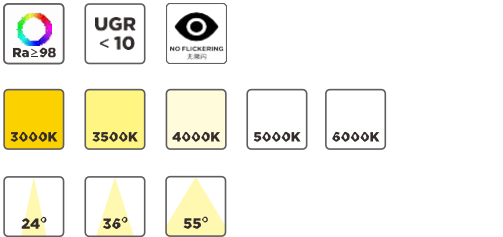

IP65


ANTI-GLARE CUP COLOR 防眩杯颜色



PRODUCT COLOR 产品颜色





LIGHT DISTRIBUTION CURVE 配光曲线




BEAM ANGLE/光束角: 24° BEAM ANGLE/光束角: 36° BEAM ANGLE/光束角: 55°

LM-812N 明装吸顶式



POWER 功率: 20W
CRI 显色指数 ≥ 98
MATERIAL 材质: 压铸铝
CHIP 光源: SMD
UGR 防眩指数 > 10
VOLTAGE 电压: AC85-265V

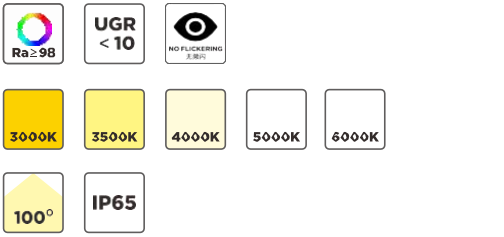

IP65


ANTI-GLARE CUP COLOR 防眩杯颜色



PRODUCT COLOR 产品颜色





LIGHT DISTRIBUTION CURVE 配光曲线




BEAM ANGLE/光束角: 100°

LM-802N 明装吸顶式



POWER 功率: 18W
CRI 显色指数 ≥ 98
MATERIAL 材质: 压铸铝
CHIP 光源: COB
UGR 防眩指数 > 10
VOLTAGE 电压: AC85-265V

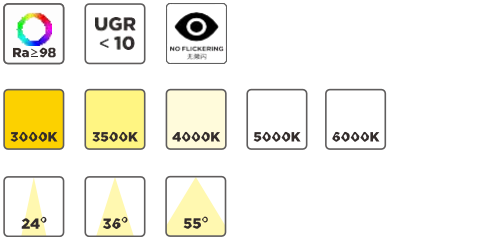

IP65


ANTI-GLARE CUP COLOR 防眩杯颜色



PRODUCT COLOR 产品颜色





LIGHT DISTRIBUTION CURVE 配光曲线




BEAM ANGLE/光束角: 24° BEAM ANGLE/光束角: 36° BEAM ANGLE/光束角: 55°

LM-813N 明装吸顶式



POWER 功率: 30W
CRI 显色指数 ≥ 98
MATERIAL 材质: 压铸铝
CHIP 光源: SMD
UGR 防眩指数 > 10
VOLTAGE 电压: AC85-265V

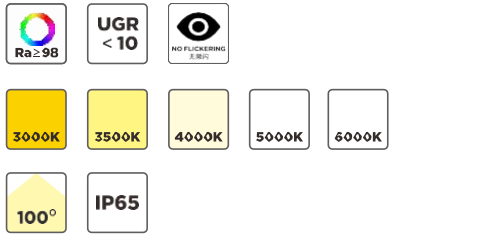

IP65


ANTI-GLARE CUP COLOR 防眩杯颜色



PRODUCT COLOR 产品颜色





LIGHT DISTRIBUTION CURVE 配光曲线



BEAM ANGLE/光束角: 100°

LM-803N 明装吸顶式



POWER 功率: 30W
CRI 显色指数 ≥ 98
MATERIAL 材质: 压铸铝
CHIP 光源: COB
UGR 防眩指数 > 10
VOLTAGE 电压: AC85-265V




ANTI-GLARE CUP COLOR 防眩杯颜色




PRODUCT COLOR 产品颜色




LIGHT DISTRIBUTION CURVE 配光曲线



BEAM ANGLE/光束角: 24°



BEAM ANGLE/光束角: 36°



BEAM ANGLE/光束角: 55°



CAIGUANG

彩光系列

A multi-faceted ring with a variety of light effects to choose from meets the needs of multiple places for flexible light control; the light source is deeply concealed and designed to provide anti-glare eye protection, making it possible to see the light but not the lights.

多面环可选，根据照明效果，面环可选用多种风格，多种光效；满足更多场所使用需求灵活控光；光源深藏设计，防眩护眼，做到见光不见灯。



ULTRA-THIN RAIL DESIGN

超薄轨道设计

New slim design, not picking layer height, track thickness is only 0.6cm, not picking style and layer height, space is not oppressive, no need to hang the ceiling, direct installation. The thickness of the rail is only 0.6cm, not picking the wind and the height of the floor, the space is not depressing, no need to hang the ceiling, direct installation.


全新纤薄设计，不挑层高，轨道厚度仅0.6cm，不挑风格及层高，空间不压抑，无需吊顶，直接安装。

COLORFUL TRACK STRIP

多彩轨道条

Track multi-color optional, applicable to a variety of decorative styles, perfectly meet the needs of different scene needs with, easy to integrate into a variety of scenes and environments; can be arbitrarily cut, and applicable to a variety of size requirements.


轨道多颜色可选，适用各种装修风格，完美满足不同的场景需求搭配，轻松融入各种场景环境；可随意裁剪，适用多种尺寸需求。

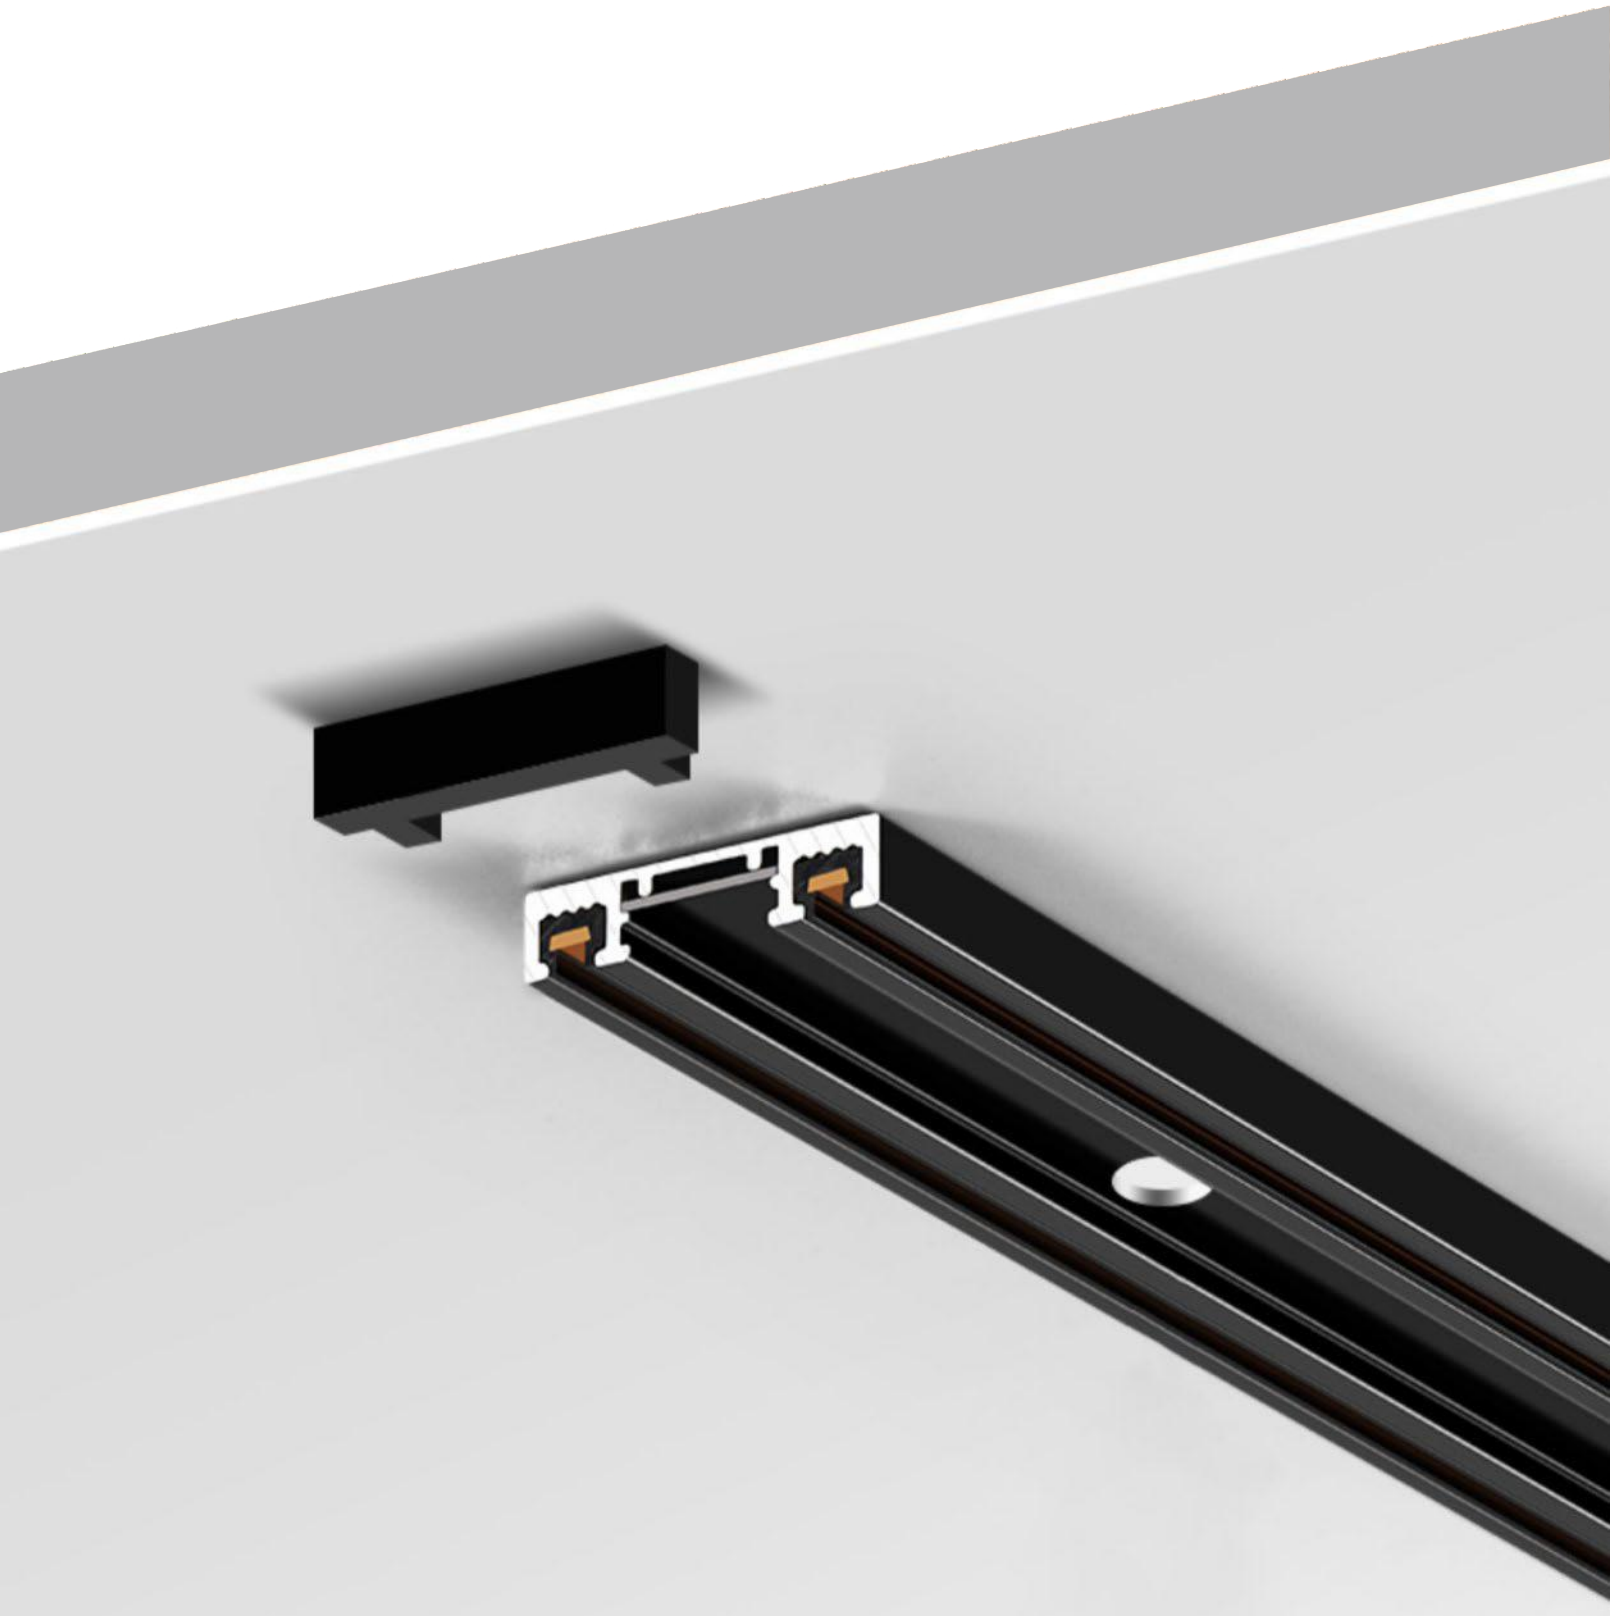

CAIGUANG SERIES

Magnetic Lighting System

彩光系列超薄磁吸

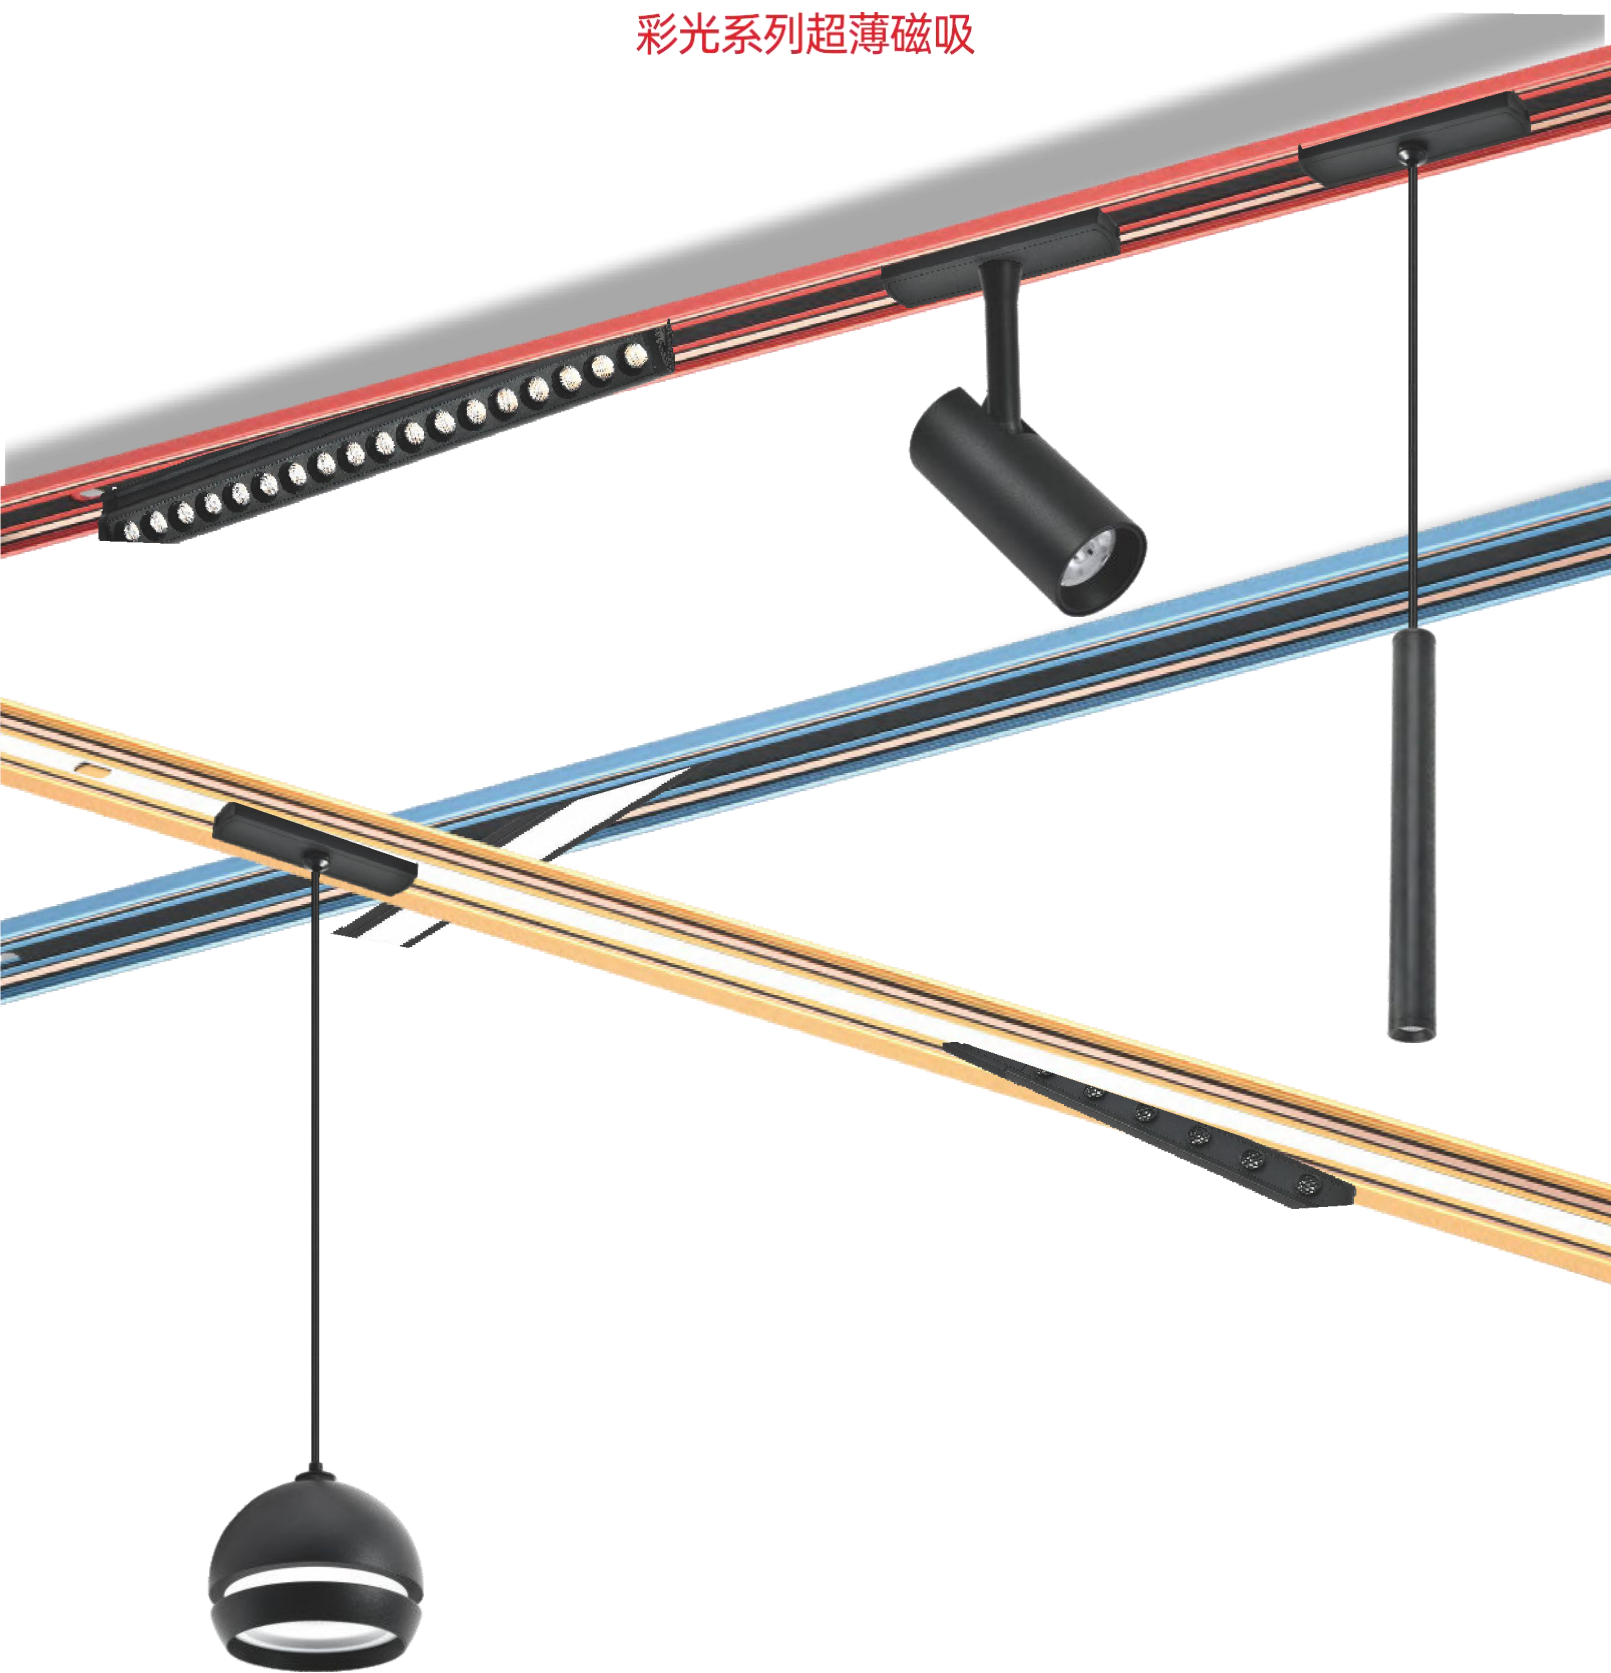

泛光灯



POWER 功率: 7W
PRODUCT SIZE 产品尺寸: 375x27x15mm
CRI 显色指数 > 90
MATERIAL 材质: 压铸铝
CHIP 光源: SMD
VOLTAGE 电压: 48V


POWER 功率: 10W
PRODUCT SIZE 产品尺寸: 375x27x15mm
CRI 显色指数 > 90
MATERIAL 材质: 压铸铝
CHIP 光源: SMD
VOLTAGE 电压: 48V

POWER 功率: 20W
PRODUCT SIZE 产品尺寸: 673x27x15mm
CRI 显色指数 > 90
MATERIAL 材质: 压铸铝
CHIP 光源: SMD
VOLTAGE 电压: 48V


LAMP COLOR 灯体颜色



LIGHT DISTRIBUTION CURVE 配光曲线



BEAM ANGLE/光束角: 100°




格栅灯




POWER 功率: 6W
PRODUCT SIZE 产品尺寸: 290x27x15mm
CRI 显色指数 > 90
MATERIAL 材质: 压铸铝
CHIP 光源: SMD
VOLTAGE 电压: 48V

POWER 功率: 12W
PRODUCT SIZE 产品尺寸: 517x27x15mm
CRI 显色指数 > 90
MATERIAL 材质: 压铸铝
CHIP 光源: SMD
VOLTAGE 电压: 48V

LAMP COLOR 灯体颜色



LIGHT DISTRIBUTION CURVE 配光曲线



BEAM ANGLE/光束角: 15° BEAM ANGLE/光束角: 24° BEAM ANGLE/光束角: 36°



折叠格栅灯




POWER 功率: 6W
PRODUCT SIZE 产品尺寸: 122x33x39mm
CRI 显色指数 > 90
MATERIAL 材质: 压铸铝
CHIP 光源: SMD
VOLTAGE 电压: 48V


POWER 功率: 12W
PRODUCT SIZE 产品尺寸: 230x33x39mm
CRI 显色指数 > 90
MATERIAL 材质: 压铸铝
CHIP 光源: SMD
VOLTAGE 电压: 48V

POWER 功率: 18W
PRODUCT SIZE 产品尺寸: 338x33x39mm
CRI 显色指数 > 90
MATERIAL 材质: 压铸铝
CHIP 光源: SMD
VOLTAGE 电压: 48V

LAMP COLOR 灯体颜色



LIGHT DISTRIBUTION CURVE 配光曲线



BEAM ANGLE/光束角: 15° BEAM ANGLE/光束角: 24° BEAM ANGLE/光束角: 36°



导轨射灯





POWER 功率: 7W
PRODUCT SIZE 产品尺寸: Φ40x120mm
CRI 显色指数 > 90
MATERIAL 材质: 压铸铝
CHIP 光源: SMD
VOLTAGE 电压: 48V

POWER 功率: 12W
PRODUCT SIZE 产品尺寸: Φ50x120mm
CRI 显色指数 > 90
MATERIAL 材质: 压铸铝
CHIP 光源: SMD
VOLTAGE 电压: 48V

LAMP COLOR 灯体颜色



LIGHT DISTRIBUTION CURVE 配光曲线

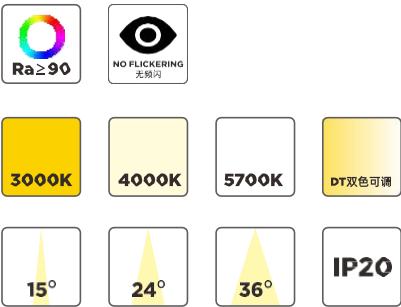

可调导轨射灯





POWER 功率: 6W
PRODUCT SIZE 产品尺寸: Φ40x120mm
CRI 显色指数 > 90
MATERIAL 材质: 压铸铝
CHIP 光源: SMD
VOLTAGE 电压: 48V

POWER 功率: 12W
PRODUCT SIZE 产品尺寸: Φ50x160mm
CRI 显色指数 > 90
MATERIAL 材质: 压铸铝
CHIP 光源: SMD
VOLTAGE 电压: 48V

LAMP COLOR 灯体颜色



LIGHT DISTRIBUTION CURVE 配光曲线

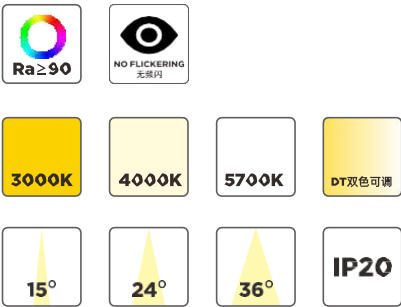

吊线灯




POWER 功率: 7W
PRODUCT SIZE 产品尺寸: $\Phi 40 \times 300 \text{mm}$
CRI 显色指数 > 90
MATERIAL 材质: 压铸铝
CHIP 光源: SMD
VOLTAGE 电压: 48V




LAMP COLOR 灯体颜色



LIGHT DISTRIBUTION CURVE 配光曲线



BEAM ANGLE/光束角: 24°



BEAM ANGLE/光束角: 36°

吊线灯




POWER 功率: 5W
PRODUCT SIZE 产品尺寸: $\Phi 60 \times 60 \text{mm}$
CRI 显色指数 > 90
MATERIAL 材质: 压铸铝
CHIP 光源: SMD
VOLTAGE 电压: 48V



LAMP COLOR 灯体颜色



LIGHT DISTRIBUTION CURVE 配光曲线



BEAM ANGLE/光束角: 100°

吊线灯




POWER 功率: 5W
PRODUCT SIZE 产品尺寸: Φ 80x120mm
CRI 显色指数 > 90
MATERIAL 材质: 压铸铝
CHIP 光源: SMD
VOLTAGE 电压: 48V



LAMP COLOR 灯体颜色



LIGHT DISTRIBUTION CURVE 配光曲线



BEAM ANGLE/光束角: 100°

吊线灯




POWER 功率: 5W
PRODUCT SIZE 产品尺寸: Φ 60x120mm
CRI 显色指数 > 90
MATERIAL 材质: 压铸铝
CHIP 光源: SMD
VOLTAGE 电压: 48V



LAMP COLOR 灯体颜色



LIGHT DISTRIBUTION CURVE 配光曲线



BEAM ANGLE/光束角: 24°

吊线灯



POWER 功率: 10W
PRODUCT SIZE 产品尺寸: Φ 20x1000mm
CRI 显色指数 > 90
MATERIAL 材质: 压铸铝
CHIP 光源: SMD
VOLTAGE 电压: 48V



LAMP COLOR 灯体颜色



配件类




NAME 名称: 轨道型材
SIZE 尺寸: 100x27x6.5mm



NAME 名称: 外置驱动
POWER 功率: 250W




NAME 名称: 十字型连接头



NAME 名称: T型连接头



NAME 名称: L型连接头(水平)



NAME 名称: L型连接头(垂直)



NAME 名称: 一字接连接头



NAME 名称: 单项连接头



BAOGUANG

宝光系列

Family-oriented design, accessory diversification, to meet different lighting needs; a full range of lightingservice, suitable for villas, commercial restaurants, hotels, exhibition halls and other application areaservice, suitable for villa floor, commercial restaurant, hotel, exhibition hall and other applications.

家族化设计，配件多样化，满足不同的照明需求；全方位灯光服务，适用于别墅平层、商业餐厅、酒店、展馆等多种应用领域。

BAOGUANG SERIES
Spotlight
—
宝光系列射灯



磁吸款



POWER 功率: 10W
PRODUCT SIZE 产品尺寸: D55XH70mm
CRI 显色指数 > 90
MATERIAL 材质: 压铸铝
CHIP 光源: COB
VOLTAGE 电压: AC85-265V

POWER 功率: 15W
PRODUCT SIZE 产品尺寸: D55XH70mm
CRI 显色指数 > 90
MATERIAL 材质: 压铸铝
CHIP 光源: COB
VOLTAGE 电压: AC85-265V










LAMP COLOR 灯体颜色



LIGHT DISTRIBUTION CURVE 配光曲线

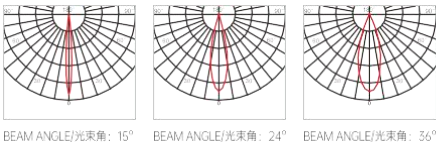

BEAM ANGLE/光束角: 15° BEAM ANGLE/光束角: 24° BEAM ANGLE/光束角: 36°

导轨款



POWER 功率: 10W
PRODUCT SIZE 产品尺寸: D55XH70mm
CRI 显色指数 > 90
MATERIAL 材质: 压铸铝
CHIP 光源: COB
VOLTAGE 电压: AC85-265V

POWER 功率: 15W
PRODUCT SIZE 产品尺寸: D55XH70mm
CRI 显色指数 > 90
MATERIAL 材质: 压铸铝
CHIP 光源: COB
VOLTAGE 电压: AC85-265V









LAMP COLOR 灯体颜色



LIGHT DISTRIBUTION CURVE 配光曲线



嵌入式



POWER 功率: 10W
CUTOUT 开孔尺寸: 75mm
CRI 显色指数 > 90
MATERIAL 材质: 压铸铝
CHIP 光源: COB
VOLTAGE 电压: AC85-265V

POWER 功率: 15W
CUTOUT 开孔尺寸: 75mm
CRI 显色指数 > 90
MATERIAL 材质: 压铸铝
CHIP 光源: COB
VOLTAGE 电压: AC85-265V










LAMP COLOR 灯体颜色



LIGHT DISTRIBUTION CURVE 配光曲线




明装单头



POWER 功率: 10W
PRODUCT SIZE 产品尺寸: D90XH40mm
CRI 显色指数 > 90
MATERIAL 材质: 压铸铝
CHIP 光源: COB
VOLTAGE 电压: AC85-265V

POWER 功率: 15W
PRODUCT SIZE 产品尺寸: D90XH40mm
CRI 显色指数 > 90
MATERIAL 材质: 压铸铝
CHIP 光源: COB
VOLTAGE 电压: AC85-265V

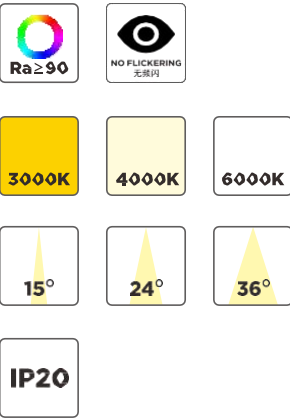

LAMP COLOR 灯体颜色



LIGHT DISTRIBUTION CURVE 配光曲线




BEAM ANGLE/光束角: 15° BEAM ANGLE/光束角: 24° BEAM ANGLE/光束角: 36°

明装双头



POWER 功率: 10W
PRODUCT SIZE 产品尺寸: D240XW90xH40mm
CRI 显色指数 > 90
MATERIAL 材质: 压铸铝
CHIP 光源: COB
VOLTAGE 电压: AC85-265V

POWER 功率: 15W
PRODUCT SIZE 产品尺寸: D240XW90xH40mm
CRI 显色指数 > 90
MATERIAL 材质: 压铸铝
CHIP 光源: COB
VOLTAGE 电压: AC85-265V

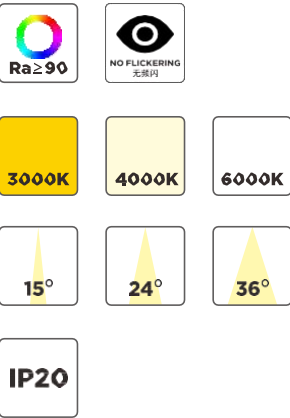

LAMP COLOR 灯体颜色



LIGHT DISTRIBUTION CURVE 配光曲线



BEAM ANGLE/光束角: 15° BEAM ANGLE/光束角: 24° BEAM ANGLE/光束角: 36°

明装三头



POWER 功率: 10W
PRODUCT SIZE 产品尺寸: D380XW90xH40mm
CRI 显色指数 > 90
MATERIAL 材质: 压铸铝
CHIP 光源: COB
VOLTAGE 电压: AC85-265V

POWER 功率: 15W
PRODUCT SIZE 产品尺寸: D380XW90xH40mm
CRI 显色指数 > 90
MATERIAL 材质: 压铸铝
CHIP 光源: COB
VOLTAGE 电压: AC85-265V

















LAMP COLOR 灯体颜色



LIGHT DISTRIBUTION CURVE 配光曲线



嵌入式



POWER 功率: 10W
CUTOUT 开孔尺寸: 75mm
CRI 显色指数 > 90
MATERIAL 材质: 压铸铝
CHIP 光源: COB
VOLTAGE 电压: AC85-265V

POWER 功率: 15W
CUTOUT 开孔尺寸: 75mm
CRI 显色指数 > 90
MATERIAL 材质: 压铸铝
CHIP 光源: COB
VOLTAGE 电压: AC85-265V


















LAMP COLOR 灯体颜色



LIGHT DISTRIBUTION CURVE 配光曲线




明装单头



POWER 功率: 10W
PRODUCT SIZE 产品尺寸: D90XH40mm
CRI 显色指数 > 90
MATERIAL 材质: 压铸铝
CHIP 光源: COB
VOLTAGE 电压: AC85-265V

POWER 功率: 15W
PRODUCT SIZE 产品尺寸: D90XH40mm
CRI 显色指数 > 90
MATERIAL 材质: 压铸铝
CHIP 光源: COB
VOLTAGE 电压: AC85-265V

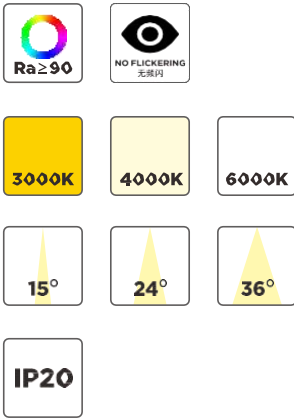

LAMP COLOR 灯体颜色



LIGHT DISTRIBUTION CURVE 配光曲线




BEAM ANGLE/光束角: 15° BEAM ANGLE/光束角: 24° BEAM ANGLE/光束角: 36°

明装双头



POWER 功率: 10W
PRODUCT SIZE 产品尺寸: D240XW90xH40mm
CRI 显色指数 > 90
MATERIAL 材质: 压铸铝
CHIP 光源: COB
VOLTAGE 电压: AC85-265V


POWER 功率: 15W
PRODUCT SIZE 产品尺寸: D240XW90xH40mm
CRI 显色指数 > 90
MATERIAL 材质: 压铸铝
CHIP 光源: COB
VOLTAGE 电压: AC85-265V

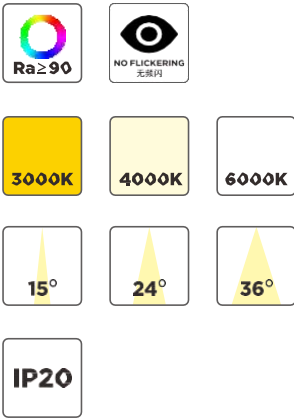

LAMP COLOR 灯体颜色



LIGHT DISTRIBUTION CURVE 配光曲线



BEAM ANGLE/光束角: 15° BEAM ANGLE/光束角: 24° BEAM ANGLE/光束角: 36°

明装三头



POWER 功率: 10W
PRODUCT SIZE 产品尺寸: D380XW90xH40mm
CRI 显色指数 > 90
MATERIAL 材质: 压铸铝
CHIP 光源: COB
VOLTAGE 电压: AC85-265V

POWER 功率: 15W
PRODUCT SIZE 产品尺寸: D380XW90xH40mm
CRI 显色指数 > 90
MATERIAL 材质: 压铸铝
CHIP 光源: COB
VOLTAGE 电压: AC85-265V



3000K

4000K

6000K

15°

24°

36°

IP20

LAMP COLOR 灯体颜色



LIGHT DISTRIBUTION CURVE 配光曲线



嵌入式



POWER 功率: 10W
CUTOUT 开孔尺寸: 75mm
CRI 显色指数 > 90
MATERIAL 材质: 压铸铝
CHIP 光源: COB
VOLTAGE 电压: AC85-265V



3000K

4000K

6000K


15°

24°

36°

IP20

LIGHT DISTRIBUTION CURVE 配光曲线



嵌入式无边框



POWER 功率: 10W
CUTOUT 开孔尺寸: 75mm
CRI 显色指数 > 90
MATERIAL 材质: 压铸铝
CHIP 光源: COB
VOLTAGE 电压: AC85-265V



Ra≥90



NO FLICKERING
无频闪



3000K



4000K



6000K



15°



24°




36°



IP20

LIGHT DISTRIBUTION CURVE 配光曲线



外方内圆单头



POWER 功率: 10W
CUTOUT 开孔尺寸: 75mm
CRI 显色指数 > 90
MATERIAL 材质: 压铸铝
CHIP 光源: COB
VOLTAGE 电压: AC85-265V



Ra≥90



NO FLICKERING
无频闪



3000K



4000K



6000K



15°



24°




36°



IP20

LIGHT DISTRIBUTION CURVE 配光曲线



外方内圆双头



POWER 功率: 20W
CUTOUT 开孔尺寸: 75mm
CRI 显色指数 > 90
MATERIAL 材质: 压铸铝
CHIP 光源: COB
VOLTAGE 电压: AC85-265V



Ra≥90



NO FLICKERING
无频闪



3000K



4000K



6000K



15°



24°




36°



IP20

LIGHT DISTRIBUTION CURVE 配光曲线



外方内圆三头



POWER 功率: 30W
CUTOUT 开孔尺寸: 75mm
CRI 显色指数 > 90
MATERIAL 材质: 压铸铝
CHIP 光源: COB
VOLTAGE 电压: AC85-265V



Ra≥90



NO FLICKERING
无频闪



3000K



4000K



6000K



15°



24°




36°



IP20

LIGHT DISTRIBUTION CURVE 配光曲线

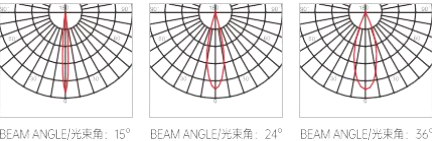

SHADOW

Familiarized design, diversified accessories to meet different lighting needs; full range of lighting services. Suitable for villa flat, commercial restaurant, hotel, exhibition hall and other applications.

模组化设计，配件多样化，满足不同的照明需求；全方位灯光服务，适用于别墅平层、商业餐厅、酒店、展馆等多种应用领域。





Small Ana C OITIDO CI

美学
突破

小巧灵动
高级质感

高级 质感

冷锻铝材
拉一

houteui tact ie
quo lily





OPTICAL ZOOM FUNCTION

光学变焦功能

5-20° optical zoom function, rotating head, can achieve more accurate and more personalised lighting needs, more comfortable with light.

5-20° optical zoom function, rotating head, can achieve more accurate and more personalised lighting needs, more comfortable with light.



SMALL ANGLE SPOTLIGHTING

小角度聚光

SHADOW SERIES Spotlight

光影7S系列洗墙灯



圆形-直照



YG-7S25N

POWER 功率: 3-5W
SIZE 产品尺寸: $\Phi 30 \times 72 \text{mm}$
CUTOUT 开孔尺寸: $\Phi 25 \text{mm}$

YG-7S35N

POWER 功率: 5-7W
SIZE 产品尺寸: $\Phi 40 \times 78.5 \text{mm}$
CUTOUT 开孔尺寸: $\Phi 35 \text{mm}$

YG-7S45N

POWER 功率: 7-9W
SIZE 产品尺寸: $\Phi 52 \times 82 \text{mm}$
CUTOUT 开孔尺寸: $\Phi 45 \text{mm}$

YG-7S55N

POWER 功率: 9-12W
SIZE 产品尺寸: $\Phi 65 \times 98 \text{mm}$
CUTOUT 开孔尺寸: $\Phi 55 \text{mm}$

YG-7S65N

POWER 功率: 12-15W
SIZE 产品尺寸: $\Phi 75 \times 100 \text{mm}$
CUTOUT 开孔尺寸: $\Phi 65 \text{mm}$

CRI 材质: ADC12
MATERIAL 光源: COB
CHIP 防眩指数 > 10
UGR




COLOR OF ANTI-GLARE CUP 防眩杯颜色



OPTICAL FILTER 滤光片



LIGHT DISTRIBUTION CURVE 配光曲线

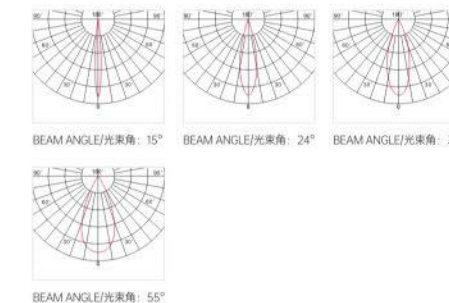

显色指数 ≥ 98

圆形-摆角



YG-7S35D

POWER 功率: 5-7W
SIZE 产品尺寸: $\Phi 40 \times 82 \text{mm}$
CUTOUT 开孔尺寸: $\Phi 35 \text{mm}$

YG-7S45D

POWER 功率: 7-9W
SIZE 产品尺寸: $\Phi 52 \times 88 \text{mm}$
CUTOUT 开孔尺寸: $\Phi 45 \text{mm}$


YG-7S55D

POWER 功率: 9-12W
SIZE 产品尺寸: $\Phi 65 \times 98 \text{mm}$
CUTOUT 开孔尺寸: $\Phi 55 \text{mm}$

YG-7S65D

POWER 功率: 12-15W
SIZE 产品尺寸: $\Phi 75 \times 102 \text{mm}$
CUTOUT 开孔尺寸: $\Phi 65 \text{mm}$

CRI 显色指数 ≥ 98
MATERIAL 材质: ADC12
CHIP 光源: COB
UGR 防眩指数 > 10

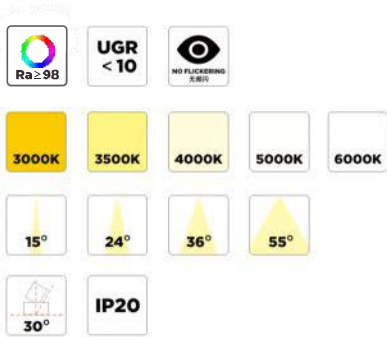


COLOR OF ANTI-GLARE CUP 防眩杯颜色




OPTICAL FILTER 滤光片



LIGHT DISTRIBUTION CURVE 配光曲线



BEAM ANGLE/光束角: 15° BEAM ANGLE/光束角: 24° BEAM ANGLE/光束角: 36°



BEAM ANGLE/光束角: 55°

圆形-无边框



YG-7S35B

POWER 功率: 5-7W
SIZE 产品尺寸: $\Phi 62 \times 82 \text{mm}$
CUTOUT 开孔尺寸: $\Phi 35 \text{mm}$

YG-7S45B

POWER 功率: 7-9W
SIZE 产品尺寸: $\Phi 75 \times 88 \text{mm}$
CUTOUT 开孔尺寸: $\Phi 45 \text{mm}$


YG-7S55B

POWER 功率: 9-12W
SIZE 产品尺寸: $\Phi 90 \times 98 \text{mm}$
CUTOUT 开孔尺寸: $\Phi 55 \text{mm}$

YG-7S65B

POWER 功率: 12-15W
SIZE 产品尺寸: $\Phi 100 \times 102 \text{mm}$
CUTOUT 开孔尺寸: $\Phi 65 \text{mm}$

CRI 显色指数 ≥ 98
MATERIAL 材质: ADC12
CHIP 光源: COB
UGR 防眩指数 > 10

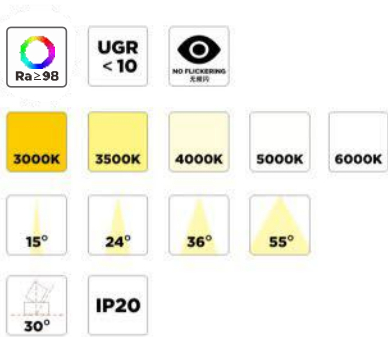


COLOR OF ANTI-GLARE CUP 防眩杯颜色




OPTICAL FILTER 滤光片



LIGHT DISTRIBUTION CURVE 配光曲线



BEAM ANGLE/光束角: 15° BEAM ANGLE/光束角: 24° BEAM ANGLE/光束角: 36°



BEAM ANGLE/光束角: 55°

圆形-调焦



YG-7S35Z

POWER 功率: 5-7W
SIZE 产品尺寸: $\Phi 40 \times 82 \text{mm}$
CUTOUT 开孔尺寸: $\Phi 35 \text{mm}$

YG-7S45Z

POWER 功率: 7-9W
SIZE 产品尺寸: $\Phi 52 \times 88 \text{mm}$
CUTOUT 开孔尺寸: $\Phi 45 \text{mm}$


YG-7S55Z

POWER 功率: 9-12W
SIZE 产品尺寸: $\Phi 65 \times 92 \text{mm}$
CUTOUT 开孔尺寸: $\Phi 55 \text{mm}$

YG-7S65Z

POWER 功率: 12-15W
SIZE 产品尺寸: $\Phi 75 \times 100 \text{mm}$
CUTOUT 开孔尺寸: $\Phi 65 \text{mm}$

CRI 显色指数 ≥ 98
MATERIAL 材质: ADC12
CHIP 光源: COB
UGR 防眩指数 > 10

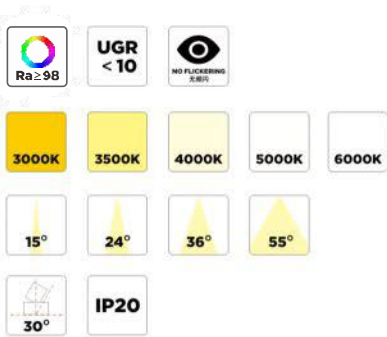


COLOR OF ANTI-GLARE CUP 防眩杯颜色




OPTICAL FILTER 滤光片



LIGHT DISTRIBUTION CURVE 配光曲线



BEAM ANGLE/光束角: 15° BEAM ANGLE/光束角: 24° BEAM ANGLE/光束角: 36°



BEAM ANGLE/光束角: 55°

圆形-黑洞



YG-7S35H

POWER 功率: 5-7W
SIZE 产品尺寸: $\Phi 40 \times 82 \text{mm}$
CUTOUT 开孔尺寸: $\Phi 35 \text{mm}$

YG-7S45H

POWER 功率: 7-9W
SIZE 产品尺寸: $\Phi 52 \times 88 \text{mm}$
CUTOUT 开孔尺寸: $\Phi 45 \text{mm}$


YG-7S55H

POWER 功率: 9-12W
SIZE 产品尺寸: $\Phi 65 \times 92 \text{mm}$
CUTOUT 开孔尺寸: $\Phi 55 \text{mm}$

YG-7S65H

POWER 功率: 12-15W
SIZE 产品尺寸: $\Phi 75 \times 100 \text{mm}$
CUTOUT 开孔尺寸: 65mm

CRI 显色指数 ≥ 98
MATERIAL 材质: ADC12
CHIP 光源: COB
UGR 防眩指数 > 10

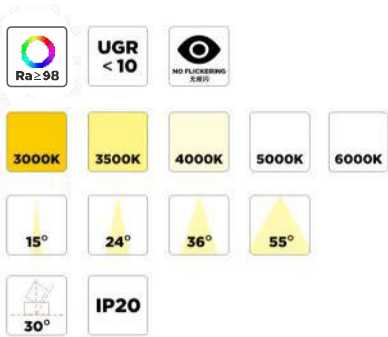


COLOR OF ANTI-GLARE CUP 防眩杯颜色




OPTICAL FILTER 滤光片



LIGHT DISTRIBUTION CURVE 配光曲线



BEAM ANGLE/光束角: 15° BEAM ANGLE/光束角: 24° BEAM ANGLE/光束角: 36°



BEAM ANGLE/光束角: 55°